
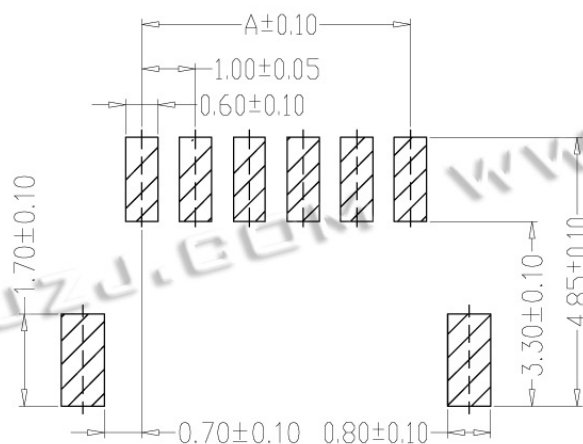
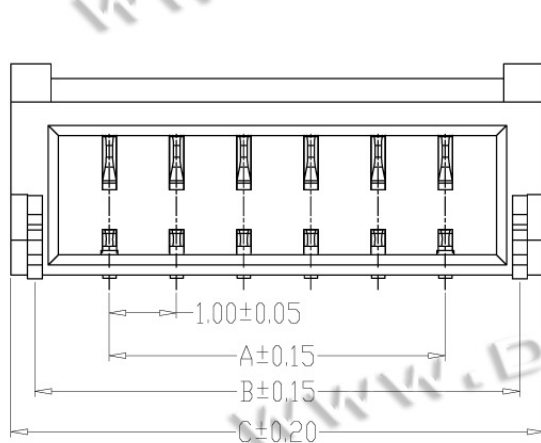


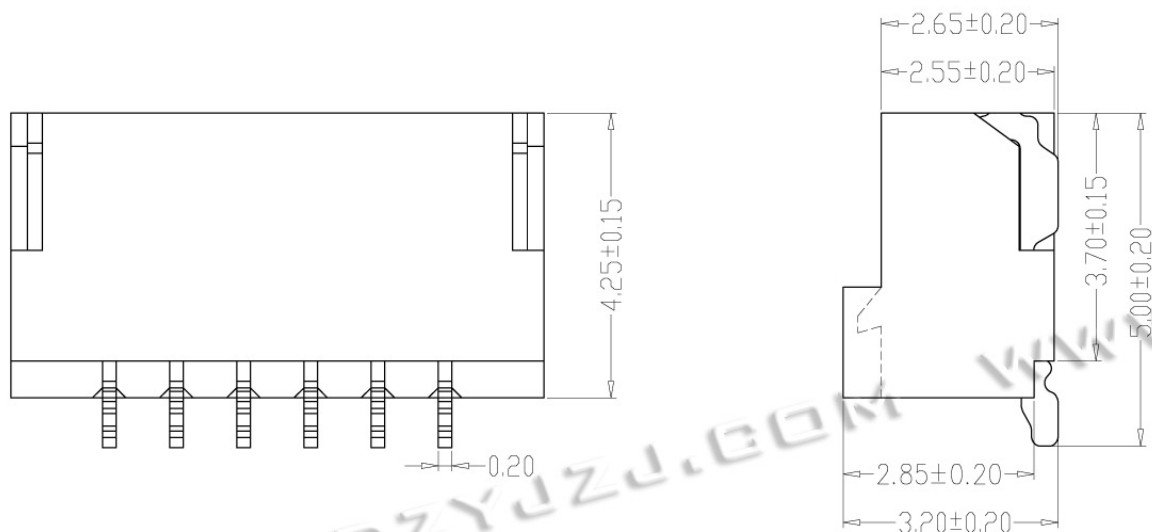

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 125V AC, DC
- 3、Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $100\text{M}\Omega$ Min
- 6、Withstanding Voltage: 500V AC/minute
- 7、Material: Wafer PA6T, UL94V-0
PIN Phosphoric bronze Tin-plated
Solder pad Phosphoric bronze Tin-plated

编 号	尺寸 (mm)		
	A	B	C
HYC161-WF02-100	1.00	3.20	4.00
HYC161-WF03-100	2.00	4.20	5.00
HYC161-WF04-100	3.00	5.20	6.00
HYC161-WF05-100	4.00	6.20	7.00
HYC161-WF06-100	5.00	7.20	8.00
HYC161-WF07-100	6.00	8.20	9.00
HYC161-WF08-100	7.00	9.20	10.00
HYC161-WF09-100	8.00	10.20	11.00
HYC161-WF10-100	9.00	11.20	12.00
HYC161-WF11-100	10.00	12.20	13.00
HYC161-WF12-100	11.00	13.20	14.00
HYC161-WF20-100	19.00	21.20	22.00


PCB LAYOUT



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15
X' $\pm 2'$ X.X' $\pm 0.5'$



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

1.0PH 超薄带钩卧贴 长针

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

SEE TABLE

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-1907031805

SHEET NO.

1 OF 1