

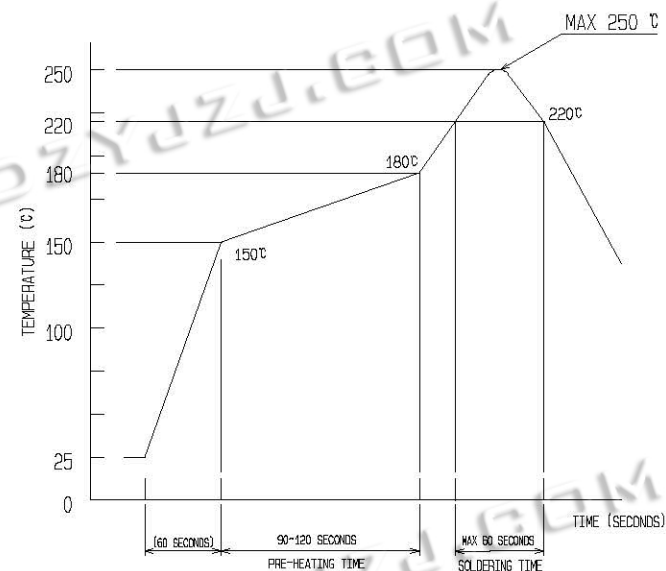





RECOMMENDED REFLOW TEMPERATURE PROFILE USING LEAD-FREE SOLDER PASTE

NOTES:

- 1.0 VOLTAGE: 60V AC/DC
2.0 IMPEDANCE: 50Ω
3.0 OPERATION TEMPERATURE: -40° C TO +85° C
4.0 CONTACT RESISTANCE: 10mΩ MAX CENTER, 20mΩ MAX OUTSIDE
5.0 INSULATION RESISTANCE: 500MΩ MIN INITIAL, 100MΩ MIN AFTER TEST
6.0 DIELECTRIC WITHSTANDING VOLTAGE: 200V AC FOR ONE MINUTE
7.0 DURABILITY: 30 CYCLES
8.0 IR REFLOW CYCLE: 2 CYCLES MAX.
9.0 VSWR:
1.3 MAX. at 0.1~3 GHz ; 1.4 MAX. at 3~6 GHz

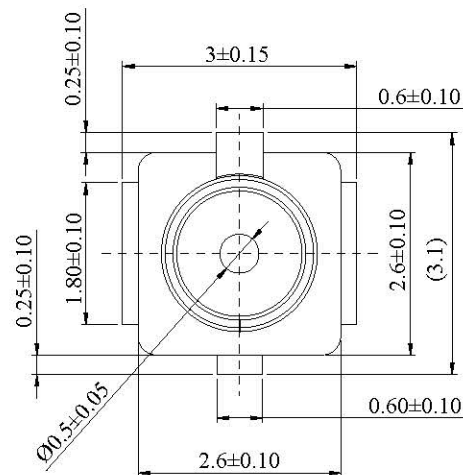

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X ±0.5*		DRAWN BY : 陈一鸣		DATE : 2014-02-23		PART NAME: RF一代板端天线座	
 UNIT: mm [inch]		CHECKED BY: 马跃		DATE : 2014-02-23		PART NO. HYC26-RF3031-125	
		APPROVED BY:		DATE :		MOLD NO. 	
SCALE:1:1 SIZE: A4		邱敏		2014-02-23		DRAW NO: HYC-2511251131	
						SHEET NO. 1 OF 1	