

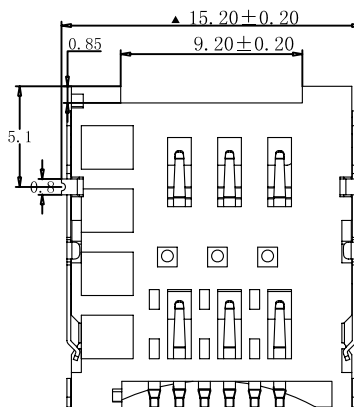

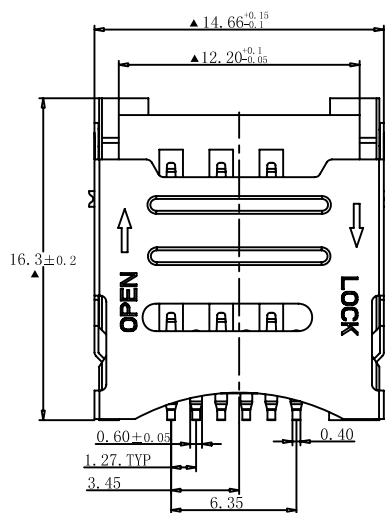
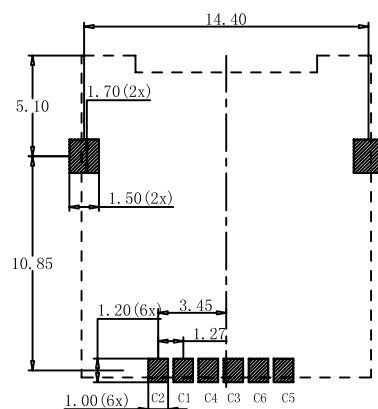


MICRO SIM

PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I/O

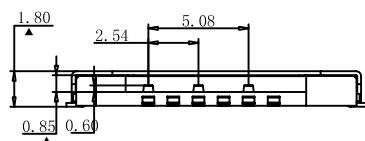


PCB LAYOUT



STEP 1 INSERT MICRO SIM CARD



STEP 2 PUSH THE SHELL



STEP 3 FINISH

一、材质和镀涂:

- 1、胶芯: LCP, UL 94 V - 0, 黑色
- 2、端子: 磷铜C5210-H, T=0.15, 镍底镀金
- 3、外壳: 不锈钢 T=0.2


二、技术参数:

接触电阻: 100mΩ Max
绝缘阻抗: 1000MΩ Min(500DC)
额定电流: 每个接触件1A Max
额定电压: 30V Max(DC)
耐 压: 500V r.m.s/min
使用温度: -40℃~85℃
湿 度: 80% R.H MAX
寿 命: >3000次




深圳市华宇创精密电子有限公司

TOLERANCE: XX ±0.30 XXX ±0.25 XXX ±0.15 X° ±2° X.X° ±0.5° UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2021-02-25	PART NAME: MICRO SIM 6PIN 掀盖式1.8H	
	CHECKED BY: 马跃	DATE : 2021-02-25	PART NO. HYC02-SIM06-180	MOLD NO.
	APPROVED BY: 邱敏	DATE : 2021-02-25	DRAW NO: HYC-SIM2102251042	SHEET NO. 1 OF 1

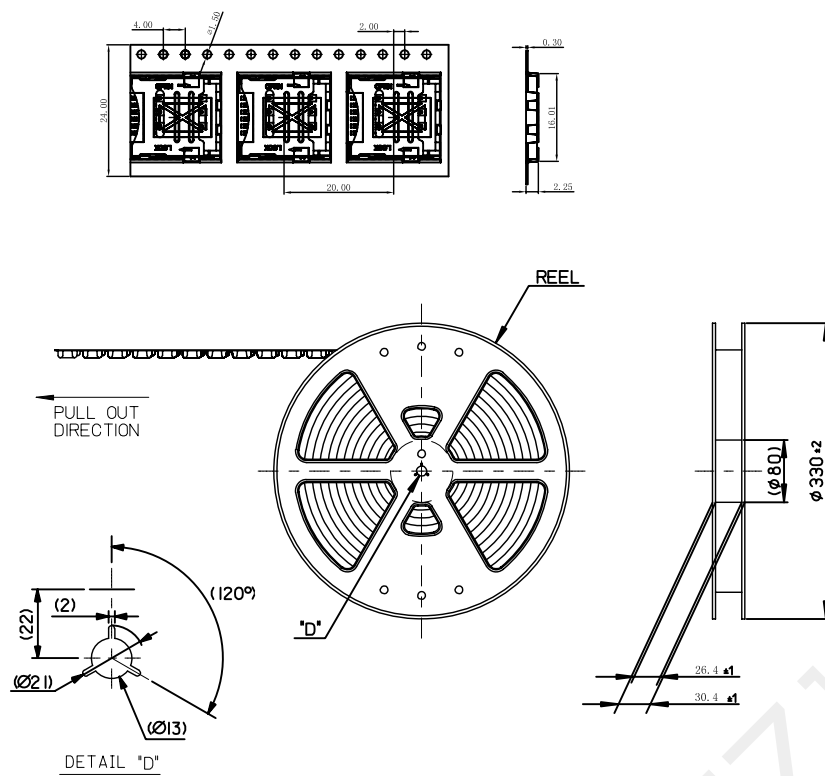


NOTES

1. RE DETAILED DIMENSION, SEE PRODUCT DRAWING.
2. NUMBER OF CONNECTORS : 1200 PCS/REEL
3. LEAD TAPE LENGTH

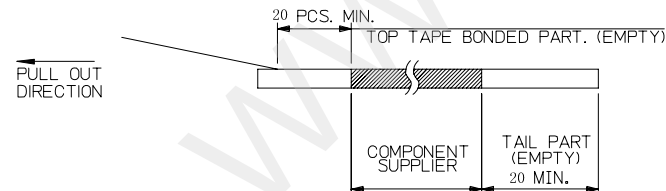

4. PEELING OFF FORCE OF TOP TAPE : 0.1N~1.3N(10gf~130gf)
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
PEEL OFF SHOULD NOT BE ALLOWED , DURING TRANSPORTION.



5. MATERIAL
(CARRIER TAPE) : (POLYSTYRENE)
(TOP TAPE) : PET
(REEL) : (PS)
6. RoHS COMPLIANT



深圳市华宇创精密电子有限公司

TOLERANCE:

XX ±0.30

XX ±0.25

XXX ±0.15

X° ±2° X° ±0.5°

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2021-02-25

PART NAME:

包装图

CHECKED BY:

马跃

DATE :

2021-02-25

PART NO.

MOLD NO.

APPROVED BY:

邱敏

DATE :

2021-02-25

DRAW NO:

SHEET NO.

1 OF 1