




SECTION:A-A
SCALE 1:1

防水圈

Specification:

1. Current Rating: 1.8 AMP
2. Voltage Rating: 30V AC, DC
3. Dielectric Strength: 500V AC RMS for 1 minute.
4. Contact Resistance: 30 mΩ Max.
5. Insulator Resistance: 500MΩ Min. AT 250V DC.
6. Mating/Unmating cycles: 5000cycles
7. Temperature: -30° C to +80° C

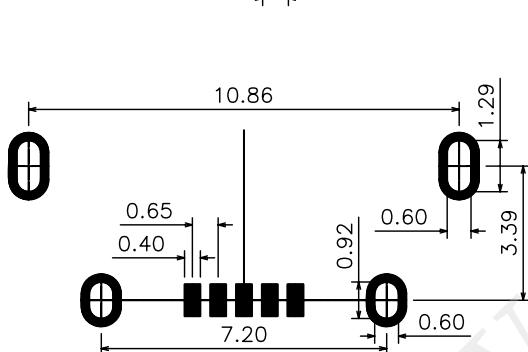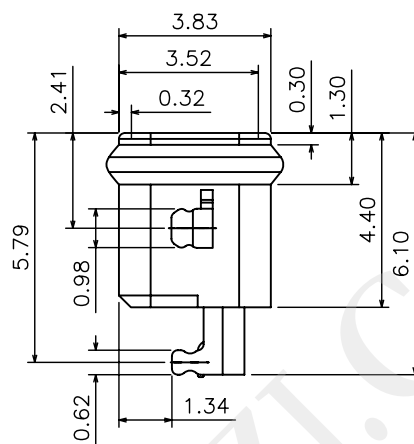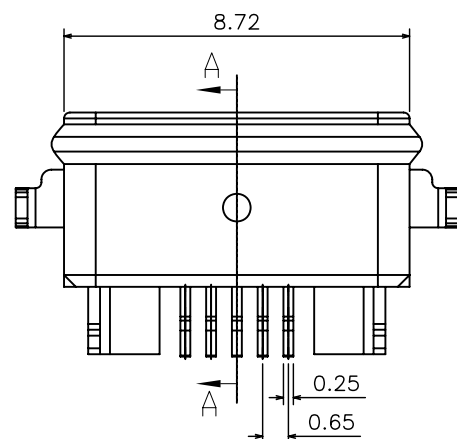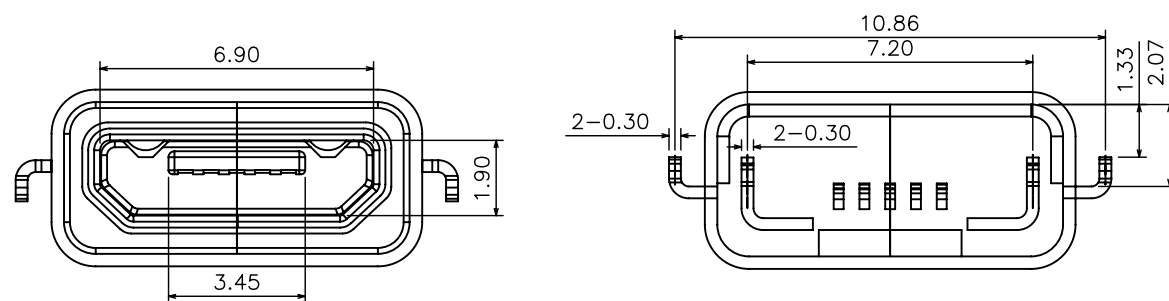

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MICRO USB 5P 带防水胶圈 沉板	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC230-USB05-214	MOLD NO.
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HVC-USB18061545	SHEET NO. 1 OF 1