
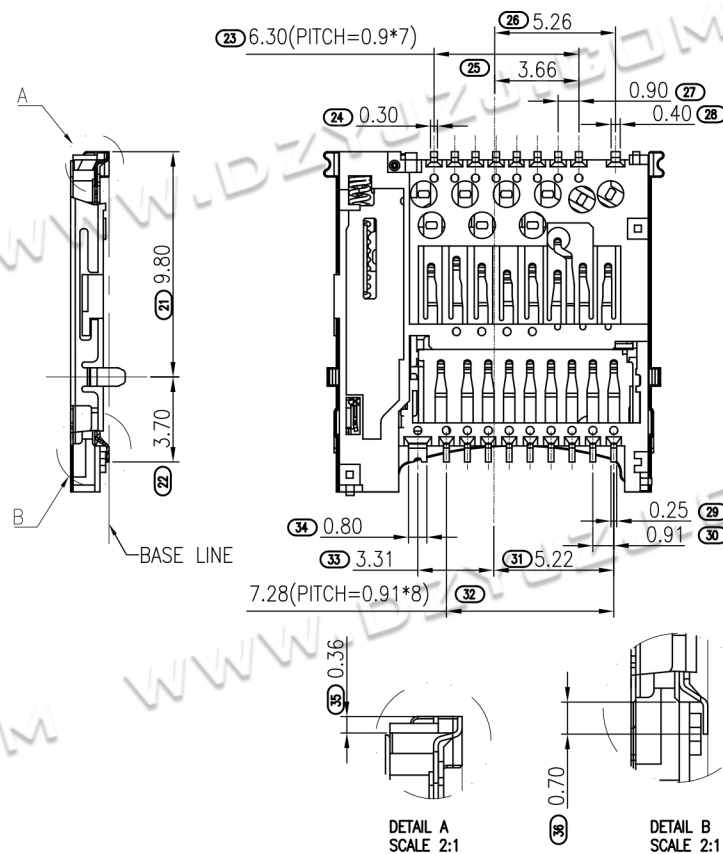
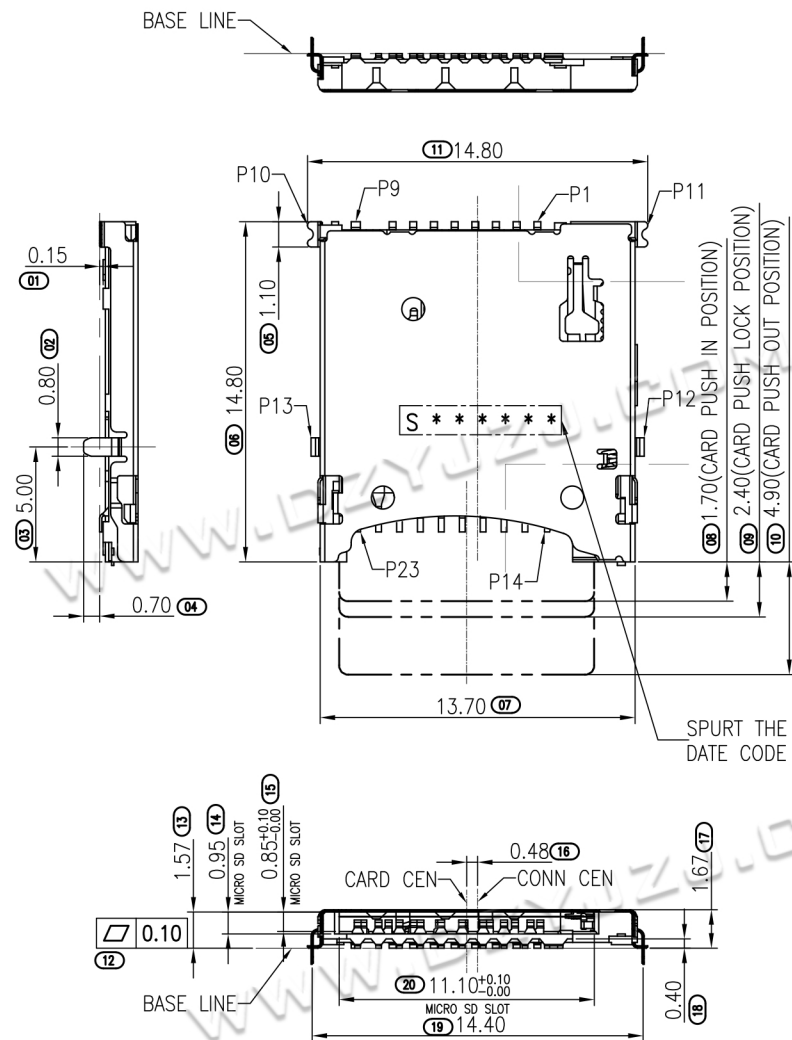




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X $\pm$ 0.30
X.XX $\pm$ 0.25
X.XXX $\pm$ 0.15X' $\pm$ 2" X.X' $\pm$ 0.5"

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

CHECKED BY :

马跃

APPROVED BY :

邱敏

DATE :

2014-02-23

DATE :

2014-02-23

DATE :

2014-02-23

PART NAME:

TF 4.0 PUSH 1.67H

PART NO.

HYC174-TF23-167



MOLD NO.

DRAW NO:

HYC-2502241951


SHEET NO.

1 OF 1

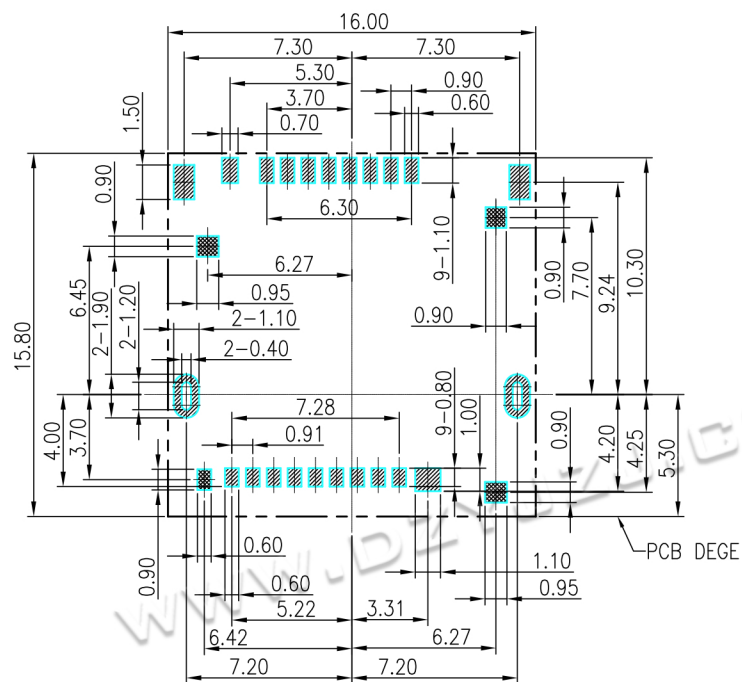RECOMMENDED P.C.B LAYOUT
TOP VIEW(TOLERANCE+/-0.05)

OPENING/CLOSE OF SWITCH

CARD DETECT SWITCH	
CARD UNINSERTION	OPEN
CARD HALF INSERTION	OPEN
CARD INSERTION	CLOSE
N/O	OPEN CLOSE

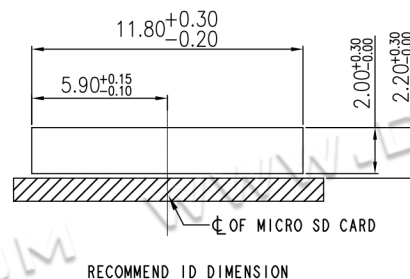

Pin No.	Pin Assignment
P1	MICRO SD DAT2
P2	MICRO SD CD/DAT3
P3	MICRO SD CMD
P4	MICRO SD VDD1
P5	MICRO SD CLK
P6	MICRO SD VSS
P7	MICRO SD DAT0/RCLK
P8	MICRO SD DAT1/RCLK
P9	MICRO SD CD
P10	GND
P11	GND
P12	GND
P13	GND
P14	GND
P15	MICRO SD VDD2
P16	MICRO SD SWIO
P17	MICRO SD VSS
P18	MICRO SD D0+
P19	MICRO SD D0-
P20	MICRO SD VSS
P21	MICRO SD D1-
P22	MICRO SD D1+
P23	MICRO SD VSS

NOTES:

(1) MATERIAL:

- 1-1.PLASTIC: LCP,THERMOPLASTIC UL 94V-0 COLOR: BLACK
- 1-2.CONTACT: COPPEER ALLOY.
- 1-3.SELL: STAINLESS STELL.

(2) PATING:

- 2-1.CONTACT:CONTACT AREA AU 3U"OVER NI 50U";SOLDER TAIL AREA: MATTED TIN 80U"MIN, OVER NI 50".
- 2-2.SHELL:SOLDERABILITY OVER PLATING NI 50U" OVER ALL.


(3) CONTACT AND TAIL COPLANARITY TO BE 0.10MM MAX.



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X	±0.30
X.XX	±0.25
X.XXX	±0.15
X." ±2"	X.X" ±0.5"

UNIT: mm [inch]
SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23

PART NAME:

TF 4.0 PUSH 1.67H

PART NO.

HYC174-TF23-167

MOLD NO.

DRAW NO:

HYC-2502241951

SHEET NO.

1 OF 1