

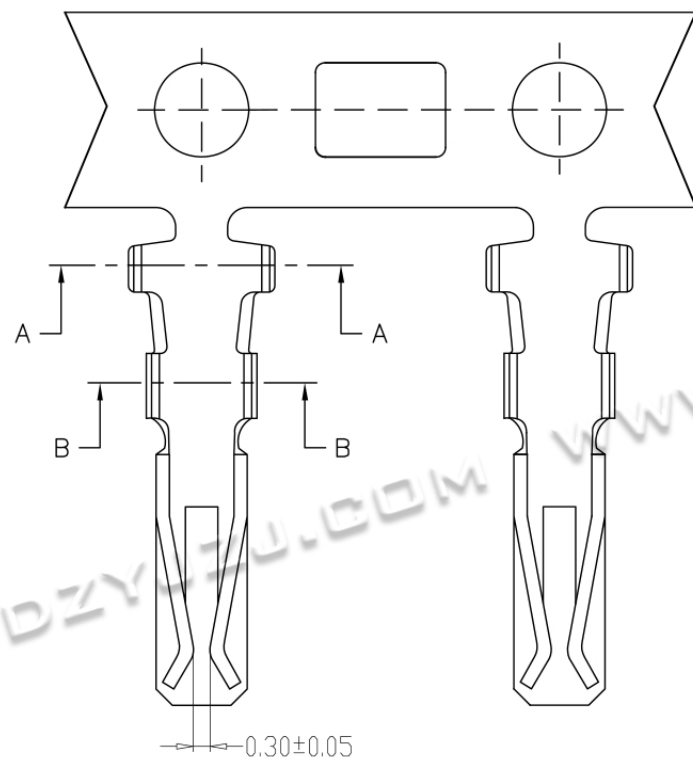



SEC:A-A



SEC:B-B

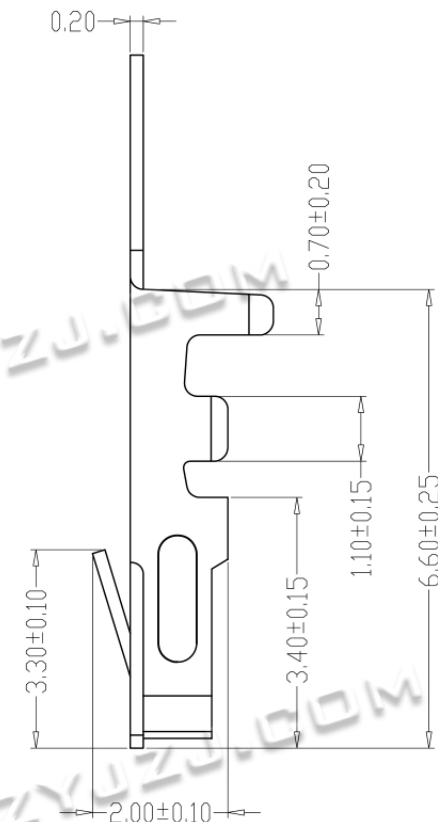

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material:Phosphoric bronze Tin-plated
- 8、Applicable Wire Sizes:AWG#22~28#



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X.* ±2° X.X* ±0.5°



UNIT: mm [inch]

SCALE:1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱国夷

DATE :

2014-02-23

PART NAME:

PHDC 带钩端子

PART NO.




HYC22-T-660

MOLD NO.

DRAW NO:

SHEET NO.

1 OF 1

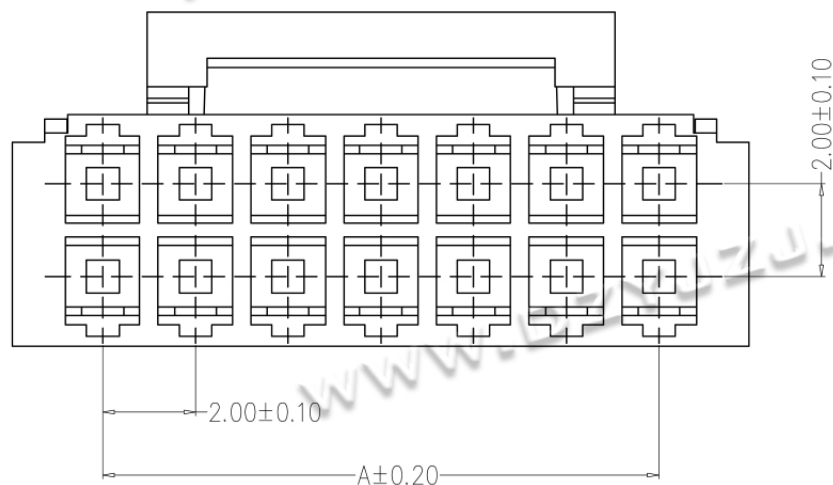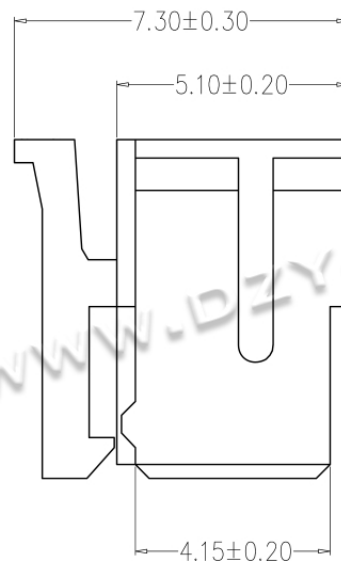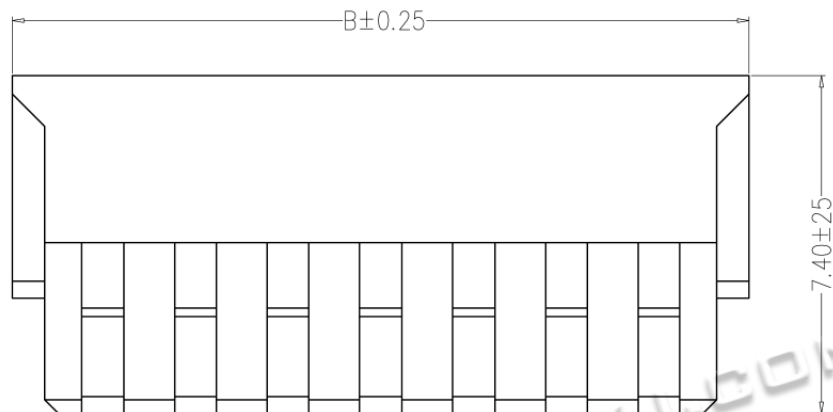

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{m}\Omega$ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material:Housing:Nylon66, UL94V-0


编 号	尺寸 (mm)	
	A	B
HYC22-2X02Y-200	2.00	6.00
HYC22-2X03Y-200	4.00	8.00
HYC22-2X04Y-200	6.00	10.00
HYC22-2X05Y-200	8.00	12.00
HYC22-2X06Y-200	10.00	14.00
HYC22-2X07Y-200	12.00	16.00
HYC22-2X08Y-200	14.00	18.00
HYC22-2X09Y-200	16.00	20.00
HYC22-2X10Y-200	18.00	22.00
HYC22-2X11Y-200	20.00	24.00
HYC22-2X12Y-200	22.00	26.00
HYC22-2X22Y-200	42.00	46.00



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15
X.* $\pm 2^{\circ}$ X.X* $\pm 0.5^{\circ}$



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱国夷

DATE :

2014-02-23

PART NAME:

PHDC 带钩孔座

PART NO.





SEE TABLE

MOLD NO.

DRAW NO:

SHEET NO.

1 OF 1

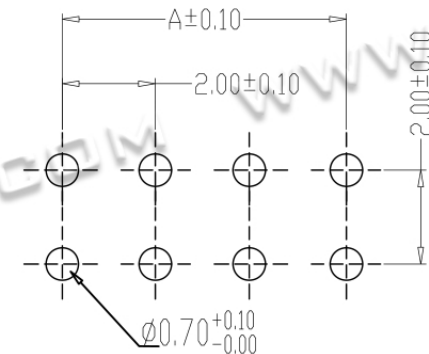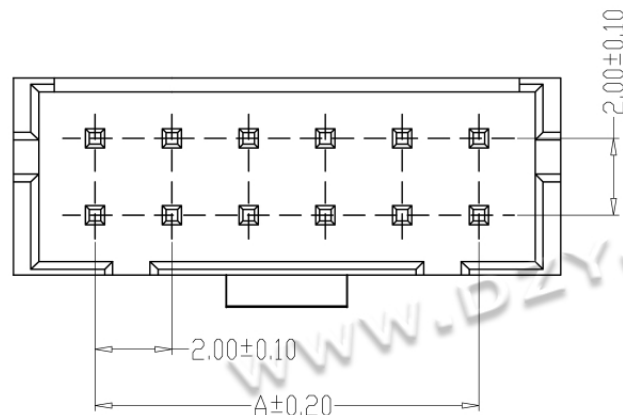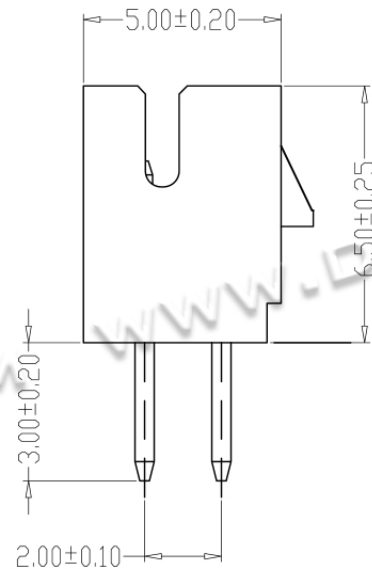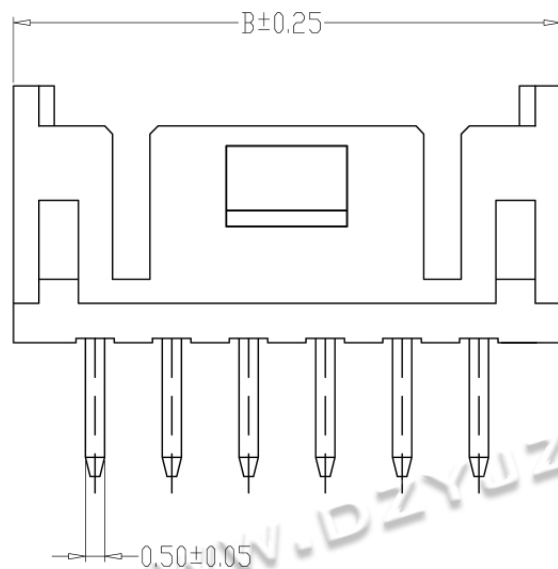

PCB LAYOUT

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
HYC22-2X02A-200	2.00	6.00
HYC22-2X03A-200	4.00	8.00
HYC22-2X04A-200	6.00	10.00
HYC22-2X05A-200	8.00	12.00
HYC22-2X06A-200	10.00	14.00
HYC22-2X07A-200	12.00	16.00
HYC22-2X08A-200	14.00	18.00
HYC22-2X09A-200	16.00	20.00
HYC22-2X10A-200	18.00	22.00
HYC22-2X11A-200	20.00	24.00
HYC22-2X12A-200	22.00	26.00
HYC22-2X22A-200	42.00	46.00



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X.* ±2* X.X* ±0.5*



UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

PHDC 带钩直针

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

SEE TABLE

MOLD NO.

APPROVED BY:

邱国夷




DATE :

2014-02-23

DRAW NO:

SHEET NO.

1 OF 1

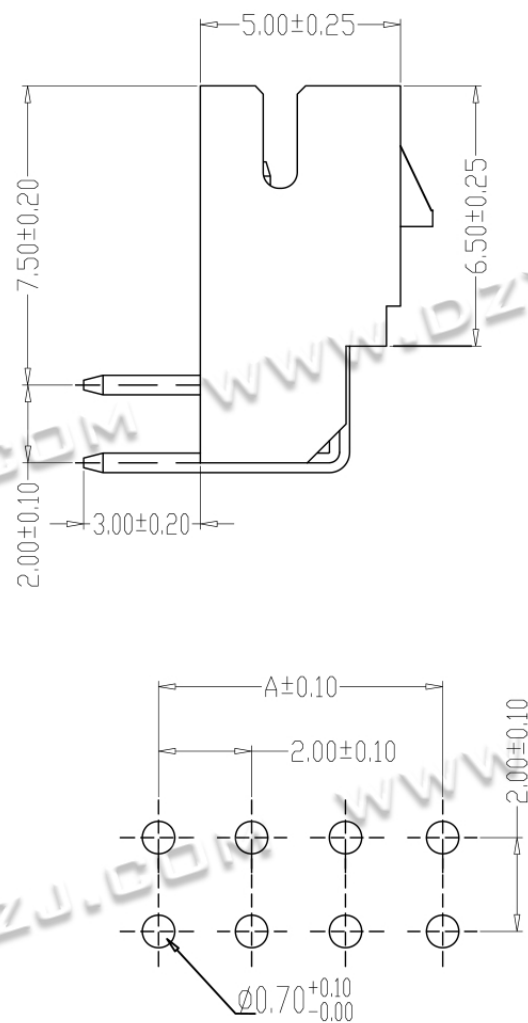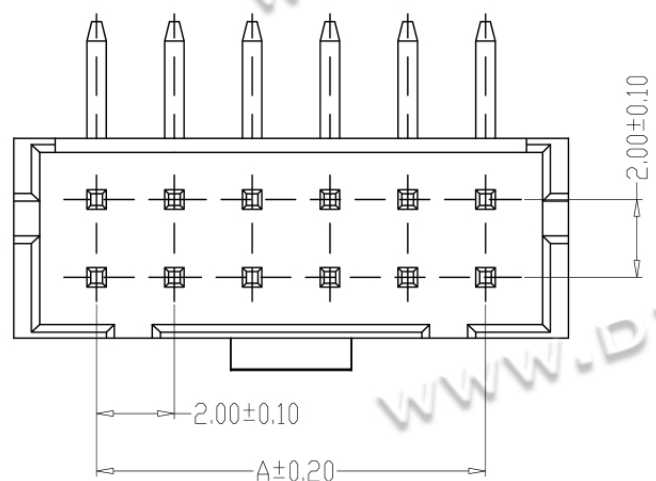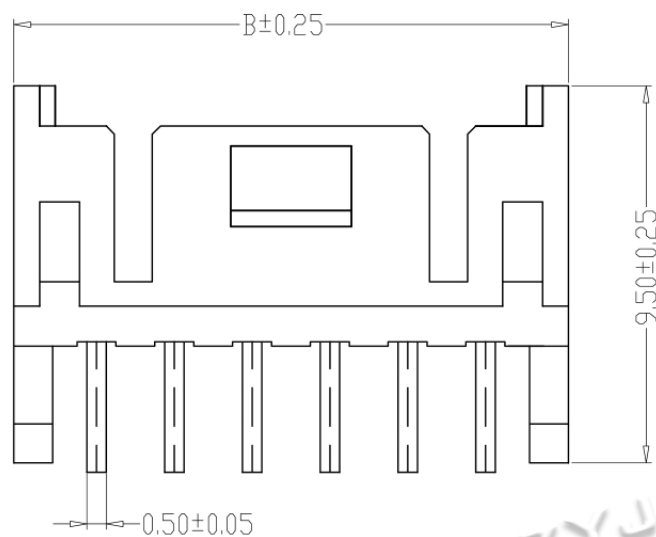

PCB LAYOUT

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4、Contact Resistance: $20\text{m}\Omega$ Max
- 5、Insulation Resistance: $1000\text{m}\Omega$ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
HYC22-2X02AW-200	2.00	6.00
HYC22-2X03AW-200	4.00	8.00
HYC22-2X04AW-200	6.00	10.00
HYC22-2X05AW-200	8.00	12.00
HYC22-2X06AW-200	10.00	14.00
HYC22-2X07AW-200	12.00	16.00
HYC22-2X08AW-200	14.00	18.00
HYC22-2X09AW-200	16.00	20.00
HYC22-2X10AW-200	18.00	22.00
HYC22-2X11AW-200	20.00	24.00
HYC22-2X12AW-200	22.00	26.00
HYC22-2X22AW-200	42.00	46.00




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15

X.* $\pm 2^{\circ}$ X.X* $\pm 0.5^{\circ}$



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY :

马跃

2014-02-23

APPROVED BY :

邱国夷

2014-02-23

PART NAME:

PHDC 带钩弯针

PART NO.

SEE TABLE

MOLD NO.

DRAW NO:

SHEET NO.

1 OF 1