
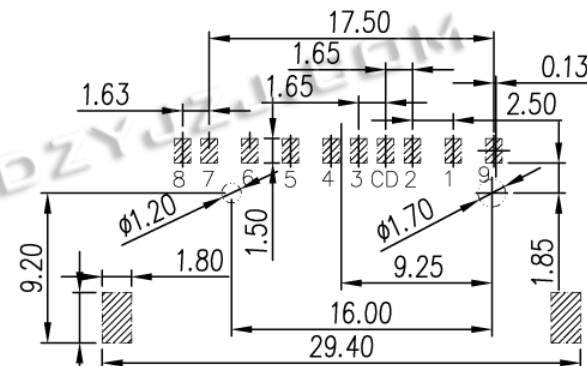
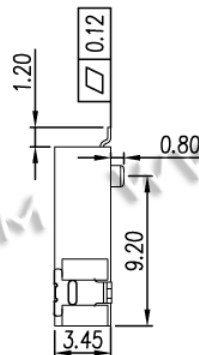
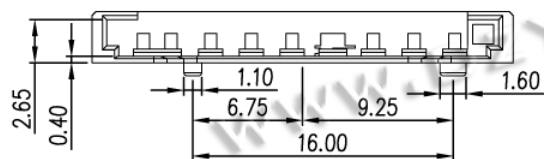


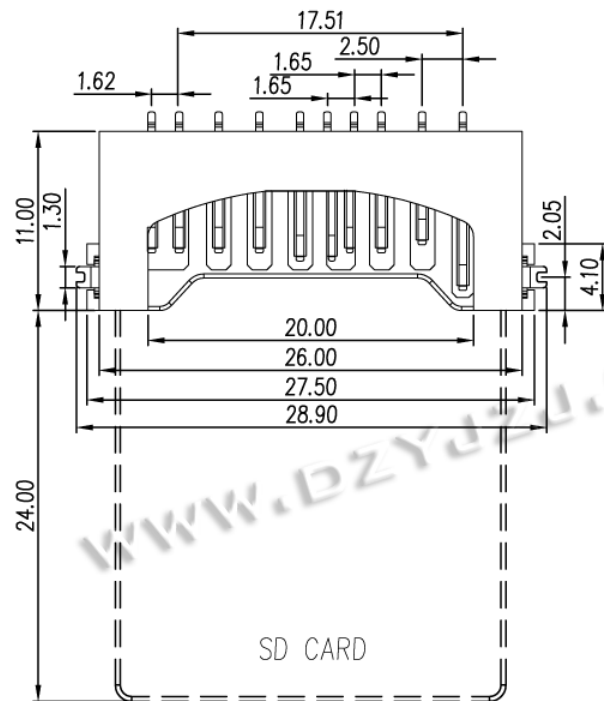

RECOMMENDED P.C.B LAYOUT
(General tolerance ± 0.05)

Specification

*Electrical Characteristics:

Contact Current Rating: 0.5 Amperes.
Dielectric Withstanding Voltage: AC500V r.m.s.
Insulation Resistance: 1000 M Ω Minimum.
Contact Resistance: 40 m Ω Maximum.

*Environmental:

Operating Temperature: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$.

*Mechanical Characteristics:

Contact Insertion Force: 1.00kgf Maximum.
Contact Separation Force: 0.20kgf Minimum.

*Material:

Insulator: HI-Temp Plastic UL 94V-0 Rated.
Contact: Copper Alloy ($t=0.20\text{mm}$).
Shell: Stainless Steel ($t=0.20\text{mm}$).
Spring: Copper Alloy ($t=0.15\text{mm}$).

Pin No.	NAME
1	CD/DAT3
2	CMD
3	Vss1
4	VDD
5	CLK
6	Vss2
7	DAT0
8	DAT1
9	DAT2



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SD全塑带焊片(鱼叉脚)	
UNIT: mm [inch]		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC19-SD11-289
SCALE: 1:1 SIZE: A4		APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
				DRAW NO:	HYC-SD135262010
				SHEET NO.	1 OF 1