
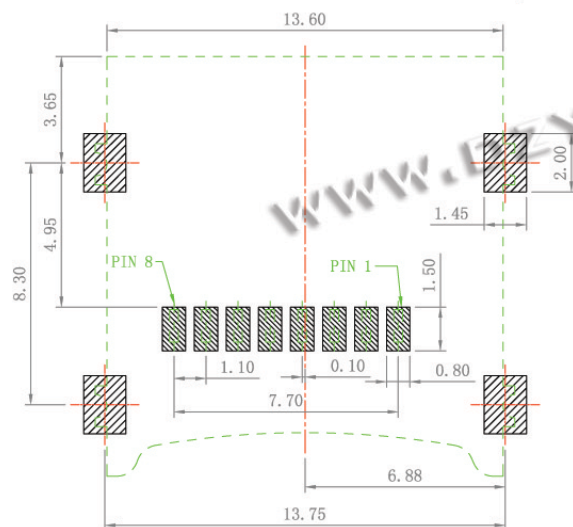
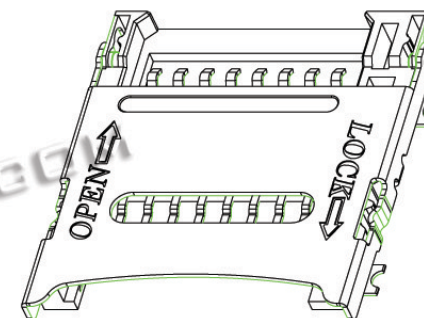


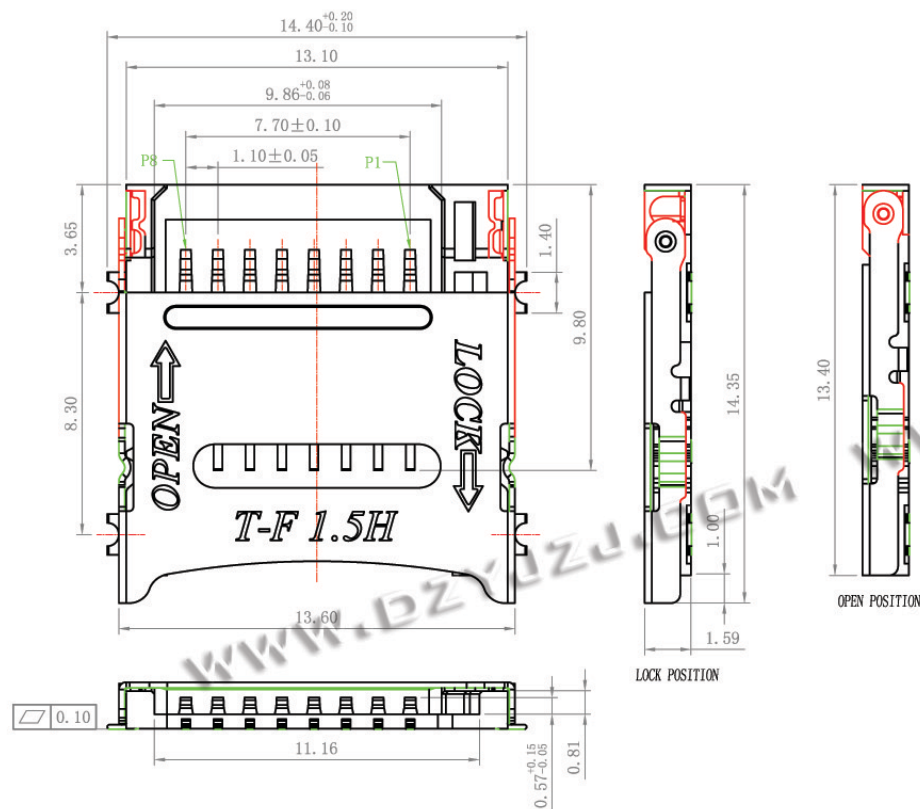

RECOMMENDED PCB LAYOUT
TOLERANCES: ± 0.05

PIN 8	DAT1
PIN 7	DATO
PIN 6	VSS
PIN 5	GLK
PIN 4	VDD
PIN 3	CMD
PIN 2	CD/DAT3 ²
PIN 1	DAT2
PIN NO	PIN ASSIGNMENT

NOTES:

1.MATERIAL:

- 1.1 Housing: High Temperature Thermoplastic UL94V-0, Color: Black
- 1.2 Terminal: Copper Alloy
- 1.3 Stator: Copper Alloy
- 1.4 Shell: Stainless Steel.

2.SPECIALITY:

- 2.1 Rated Current: 1.0A
- 2.2 Rated Voltage: 30V
- 2.3 Contact Resistance: 50m Ω Max
- 2.4 Insulation Resistance: 100M Ω Min 100V DC
- 2.5 Dielectric Withstanding Voltage: 100V AC
- 2.6 Solder Ability: 245 $\pm$ 5 $^{\circ}$ C; 5 $\pm$ 0.5s
- 2.7 Durability: 5000 cycles
- 2.8 Operating Condition: Temperature: -30 $^{\circ}$ C $\sim$ +80 $^{\circ}$ C; Humidity: 80%R.H Max



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: TF 掀盖 1.5H	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC30-TF08-150	MOLD NO.
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HYC-TF16041816	SHEET NO. 1 OF 1