



由 Foxit PDF
版权所有 (c
仅用于评估

REV	ECN NO	DRA	APPD	DATE
A	FIRST RELEASE	George Gao	Human Zhou	2013.09.12

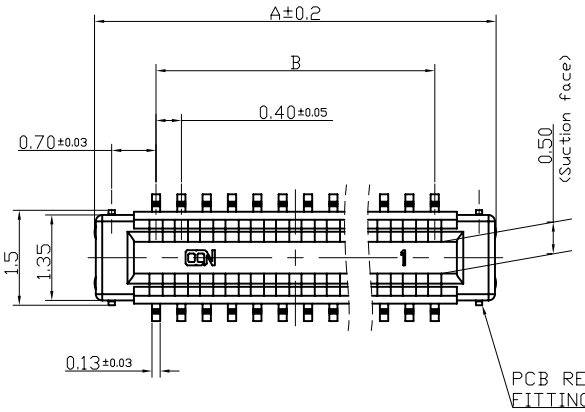








MATING SECTION

Specifications:
1) Material:
1-1.Molded portion: LCP resin (UL94 V-0)
1-2.Contact and Post: Copper alloy.
2) Surface treatment:
2-1.Terminal portion: Base: Ni plating Surface: Au plating (except the terminal tips) ; Exposed nickel portions.
2-2.Metal clips: Base: Ni plating Surface: Au flash plating (except the terminal tips) Or Base: Ni plating Surface: Sn flash plating (except the terminal tips)
3) Characteristics:
3-1. Rated voltage: 60V AC/DC
3-2. Rated current: 0.3A/contact (Max. 5A at total contact)
3-3. Insulation resistance: Min. 1000MΩ (initial)
3-4. Breakdown voltage: 150V AC for 1 min.
3-5.Saltwater spray resistance (header and socket mated): 24 hours, insulation resistance min.100MΩ, contact resistance max. 90mΩ
3-6. Contact resistance: Max. 90mΩ
3-7. Ambient temperature: -55℃-+85℃
3-8. Storage temperature: -55℃-+85℃ (product only); -40℃-+50℃ (emboss packing)
3-9. Composite insertion force: Max. 0.981N/contacts X contacts (initial)
3-10. Composite removal force: Min. 0.165N/contacts X contacts
3-11. Post holding force: Min. 0.49N/contacts
3-12. Insertion and removal life: 50 times

TABLE:

40	9.54	7.60
30	7.54	5.60
24	6.34	4.40
16	4.74	2.80
10	3.54	1.60
NUMBER OF CONTACTS	A	B

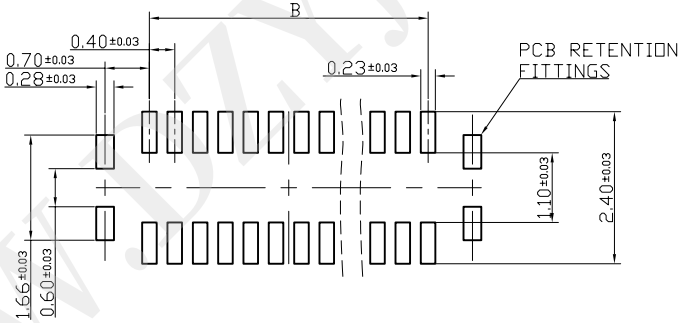

RECOMMENDED PCB LAYOUT

OK-23GM***-04


HEADER
NUMBER OF CONTACTS
PITCH-0.4MM


DIMENTION IN mm		®					
TOLERANCE UNLESS OTHERWISE SPECIFIED		℃					
. ±0.20	. ±2°	APPD:	TITLE: 0.4MM BTB (MATING HEIGHT 0.8H)				
.0 ±0.10	.0 ±1°	CHKD:	DWG NO: OK-23GM***-04				
.00 ±0.05	.00±0.5°	DRA: George Gao 2013.10.12	PROJ	Q'TY	SIZE	SHEET	SCALE	REV
.000±0.03	.000±0.3°			--	A4	1/1	1:1	A

WWW.DZYJZ.COM

由 Foxit PDF
版权所有 (c
仅用于评估

REV	ECN NO	DRA	APPD	DATE
A	FIRST RELEASE	George Gao	Human zhou	2013.09.12

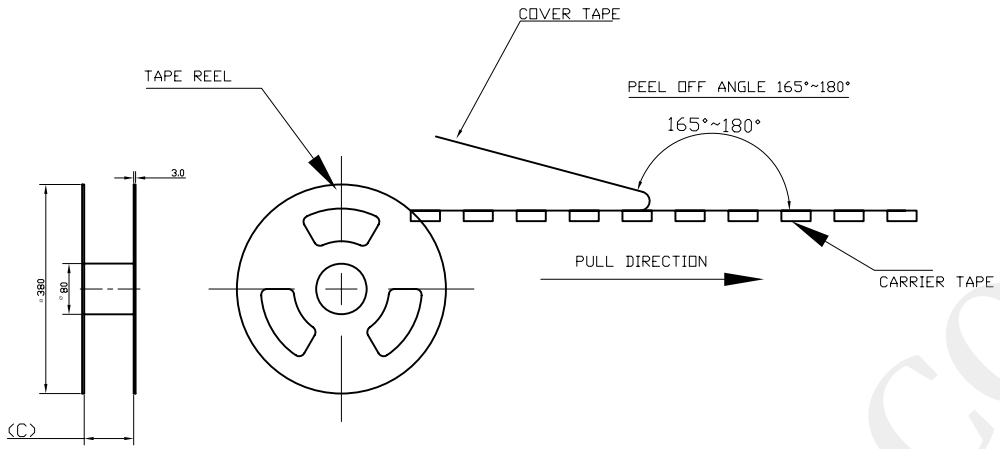

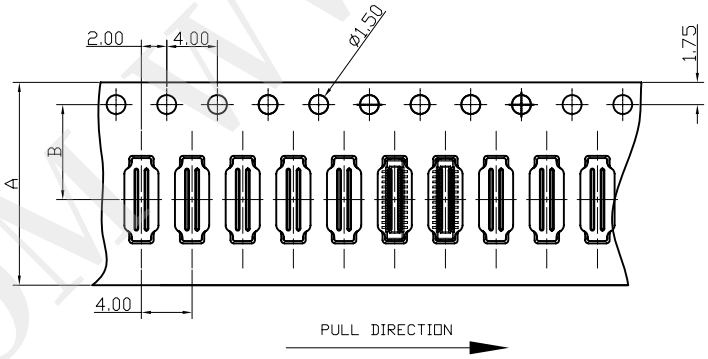



DIMENTION IN mm						
TOLERANCE UNLESS OTHERWISE SPECIFIED		APPD:	TITLE: 0.4MM BTB (MATING HEIGHT 0.8H)			
. ±0.20	. ±2°	CHKD:	DWG NO: OK-23GM***-04			
.0 ±0.10	.0 ±1°	DRA: George Gao 2013.10.12	PROJ	Q'TY	SIZE	SHEET	SCALE	REV
.00 ±0.05	.00±0.5°			--	A4	1/1	1:1	A
.000±0.03	.000±0.3°							


WWW.DZYJZJ.COM


由 Foxit PDF
版权所有 (c
仅用于评估

REV	ECN NO	DRA	APPD	DATE
A	FIRST RELEASE	George Gao	Human Zhou	2013.09.18

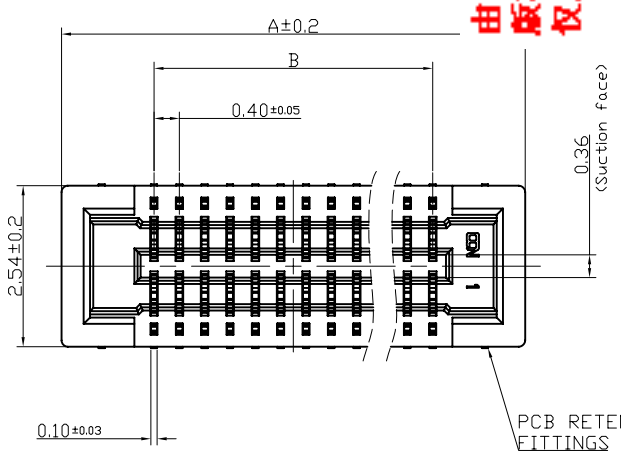








MATING SECTION

Specifications:
1) Material:
1-1.Molded portion: LCP resin (UL94 V-0)
1-2.Contact and Post: Copper alloy.
2) Surface treatment:
2-1.Terminal portion: Base: Ni plating Surface: Au plating (except the terminal tips) ; Exposed nickel portions.
2-2.Metal clips: Base: Ni plating Surface: Au flash plating (except the terminal tips) Or Base: Ni plating Surface: Sn flash plating (except the terminal tips)
3) Characteristics:
3-1. Rated voltage: 60V AC/DC
3-2. Rated current: 0.3A/contact (Max. 5A at total contact)
3-3. Insulation resistance: Min. 1000MΩ (initial)
3-4. Breakdown voltage: 150V AC for 1 min.
3-5.Saltwater spray resistance (header and socket mated): 24 hours, insulation resistance min.100MΩ, contact resistance max. 90mΩ
3-6. Contact resistance: Max. 90mΩ
3-7. Ambient temperature: -55℃-+85℃
3-8. Storage temperature: -55℃-+85℃ (product only); -40℃-+50℃ (emboss packing)
3-9. Composite insertion force: Max. 0.981N/contacts X contacts (initial)
3-10. Composite removal force: Min. 0.165N/contacts X contacts
3-11. Post holding force: Min. 0.49N/contacts
3-12. Insertion and removal life: 50 times

TABLE:

NUMBER OF CONTACTS	A	B
40	10.52	7.60
30	8.52	5.60
24	7.32	4.40
16	5.72	2.80
10	4.52	1.60

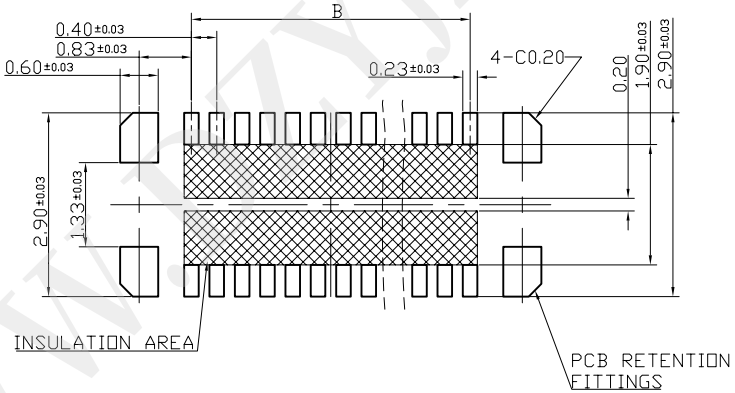

RECOMMENDED PCB LAYOUT

0K-23GF***-04

SOCKET
PITCH-0.4MM
NUMBER OF CONTACTS

DIMENTION IN mm		®				
TOLERANCE UNLESS OTHERWISE SPECIFIED		©				
. ±0.20	. ±2°	APPD:	TITLE: 0.4MM BTB (MATING HEIGHT 0.8H)			
.0 ±0.10	.0 ±1°	CHKD:	DWG NO: 0K-23GF***-04			
.00 ±0.05	.00±0.5°	DRA: George Gao 2013.10.18	PROJ	Q'TY	SIZE	SHEET	SCALE	REV
.000±0.03	.000±0.3°			--	A4	1/1	1:1	A

WWW.DZYZJ.COM

由 Foxit PDF
版权所有 (c
仅用于评估

REV	ECN NO	DRA	APPD	DATE
A	FIRST RELEASE	George Gao	Human zhou	2013.09.12

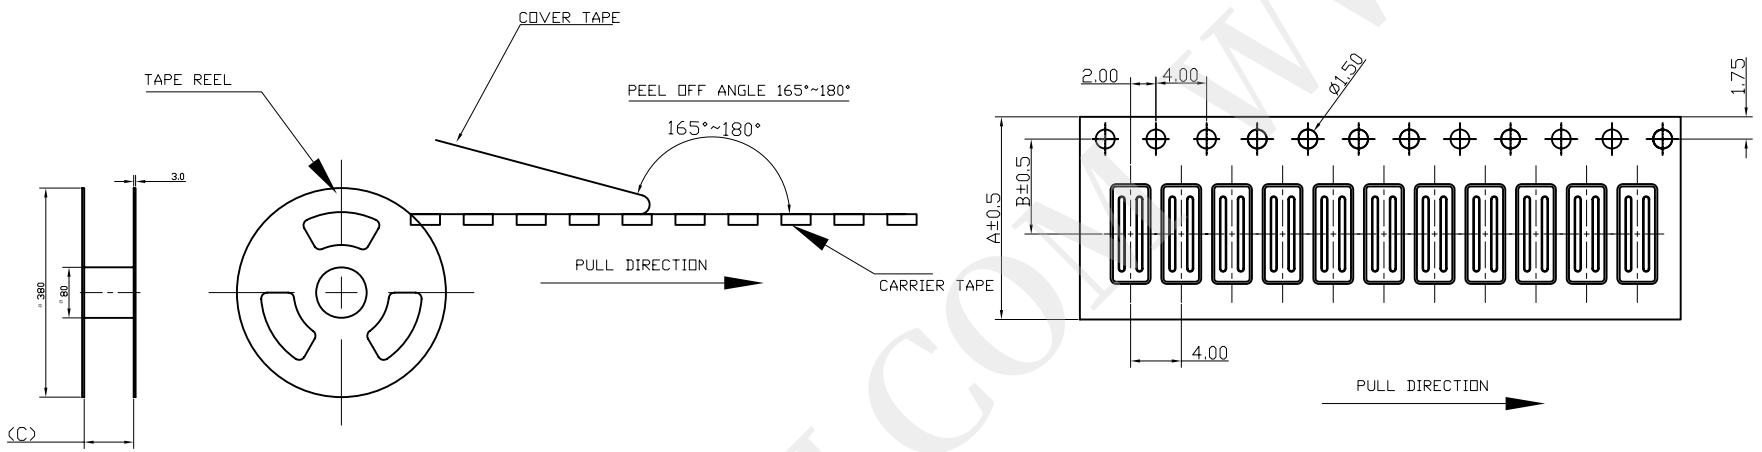


TABLE:

40	24.00	11.50	25.4	20000
30	16.00	7.50	17.4	
24				
16				
10				
NUMBER OF CONTACTS	A	B	C	QTY/REEL

DIMENTION IN mm	
TOLERANCE UNLESS OTHERWISE SPECIFIED	
. ±0.20	. ±2°
.0 ±0.10	.0 ±1°
.00 ±0.05	.00±0.5°
.000±0.03	.000±0.3°

APPD:	TITLE: 0.4MM BTB (MATING HEIGHT 0.8H)					
CHKD:	DWG NO: OK-23GF***-04					
DRA: George Gao 2013.10.18	PROJ	Q'TY	SIZE	SHEET	SCALE	REV
		--	A4	1/1	1:1	A

WWW.DZYJZJ.COM