

SPECIFICATIONS

Current Rating: 1.5A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -25°C ~ +85°C




Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: NY6T

Color: Natural(Black)

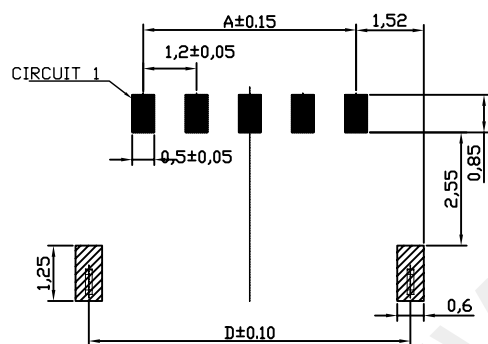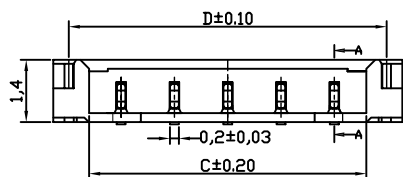

P.C.B. LAYOUT
(TOP VIEW)

Poles	Dimensions (mm)			
	A	B	C	D
02	1.20	4.20	2.65	3.65
03	2.40	5.40	3.85	4.85
04	3.60	6.60	5.05	6.05
05	4.80	7.80	6.25	7.25
06	6.00	9.00	7.45	8.45
07	7.20	10.20	8.65	9.65
10	10.80	13.80	12.25	13.25



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 1.2压接式针座	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC05-ZHXX-120	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HVC-WF17122159	SHEET NO. 1 OF 1