
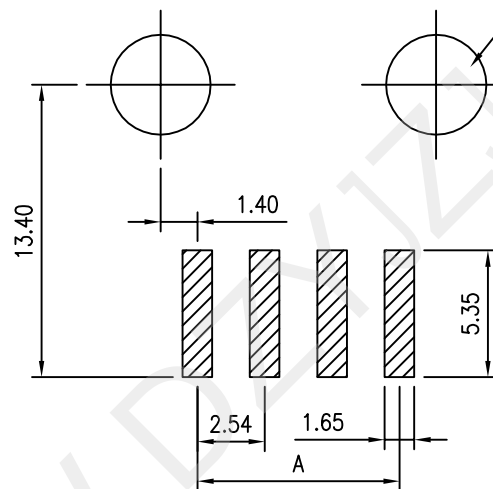
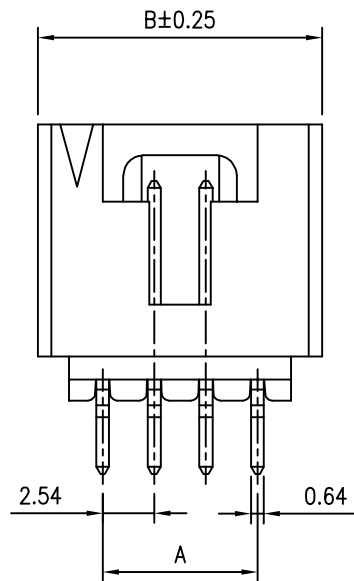


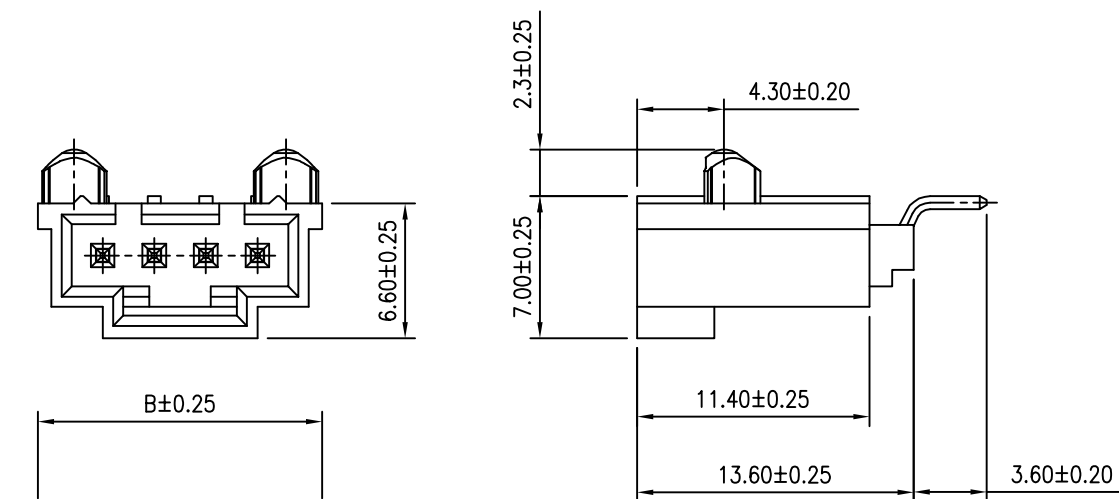

P.C.B LAYOUT

$\varnothing 3.40 \pm 0.05$ THRU HOLE-2 PLCS
FOR PCB RETENTION
 $\varnothing 3.76 \pm 0.05$ THRU HOLE-2 PLCS
FOR LOCATION ONLY

CKT	Dimension mm	
	A	B
2	2.54	8.89
3	5.08	11.43
4	7.62	13.97
5	10.16	16.51
6	12.70	19.05
7	15.24	21.59
8	17.78	24.13
9	20.32	26.67
10	22.86	29.21
11	25.40	31.75
12	27.94	34.29

SPECIFICATIONS

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Insulation resistance: $1000\text{M}\Omega/\text{min.}$
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: $20\text{m}\Omega/\text{max.}$


WAFER

- MATERIAL: PA66 UL94V-0
- PIN: Brass/TIN-plated



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." $\pm 2^{\circ}$ X.X" $\pm 0.5^{\circ}$ 

UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

2.54PH 卧贴带柱

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23

PART NO.

HYC165-WFN-254

MOLD NO.

DRAW NO:

HYC-1906230957

SHEET NO.

1 OF 1