
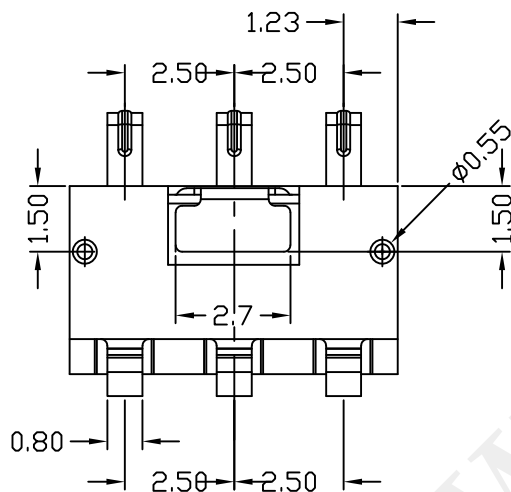
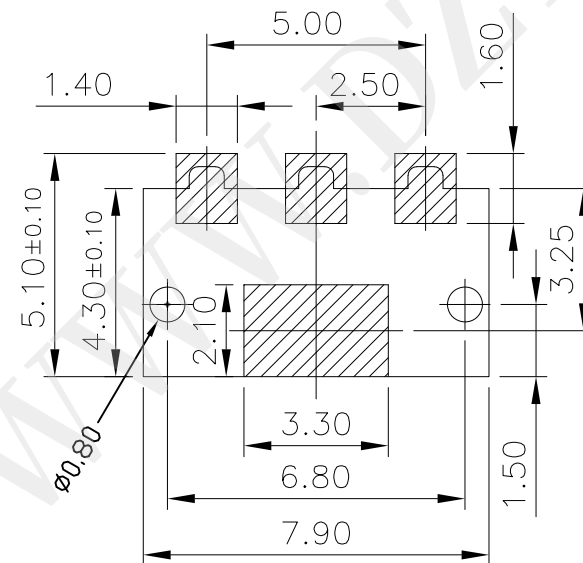
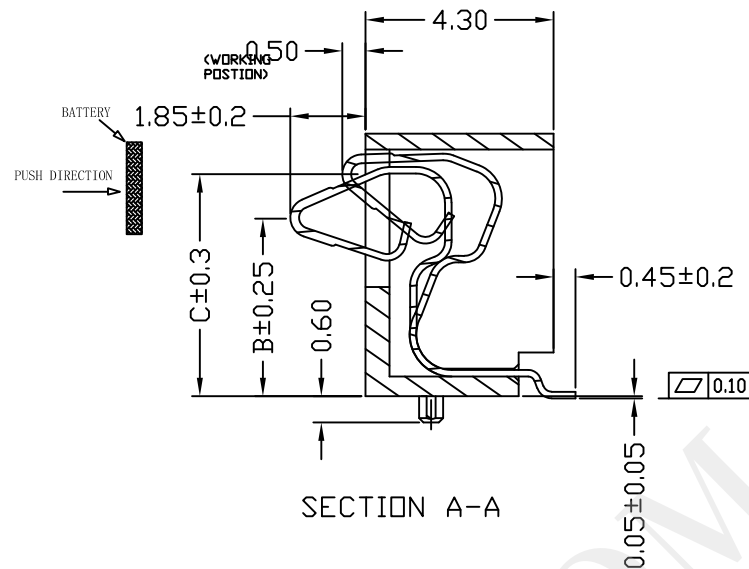


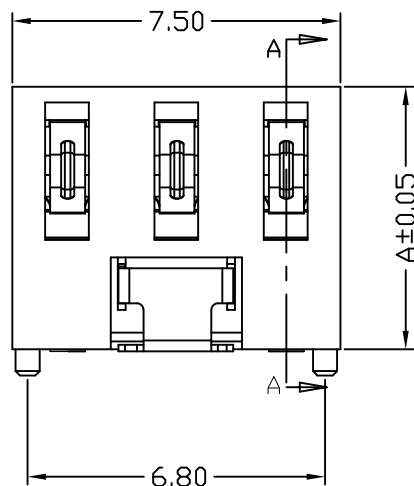

PART NO.	A	B	C
HYC03-BB3P2554D-68	5.4	3.8	4.6
HYC03-BB3P2560D-68	6.0	4.4	5.2
HYC03-BB3P2565D-68	6.5	4.9	5.7
HYC03-BB3P2570D-68	7.0	5.4	6.2
HYC03-BB3P2575D-68	7.5	5.9	6.7
HYC03-BB3P2580D-68	8.0	6.4	7.2

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 镀金



深圳市华宇创精密电子有限公司


TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY:

陈一鸣

DATE:

2014-02-23

PART NAME:

2.5PH 3P 侧压式电池座 带柱

CHECKED BY:

马跃

DATE:

2014-02-23

PART NO.

SEE TABLE

APPROVED BY:

柯南

DATE:

2014-02-23

DRAW NO:

HYC-BA171821601

SHEET NO.

1 OF 1