
REV.	ECN NO./DESCRIPTION	DATE
1A	R190005	04/25'19
1B	R190005	07/10'19
1C	R190005	10/09'19

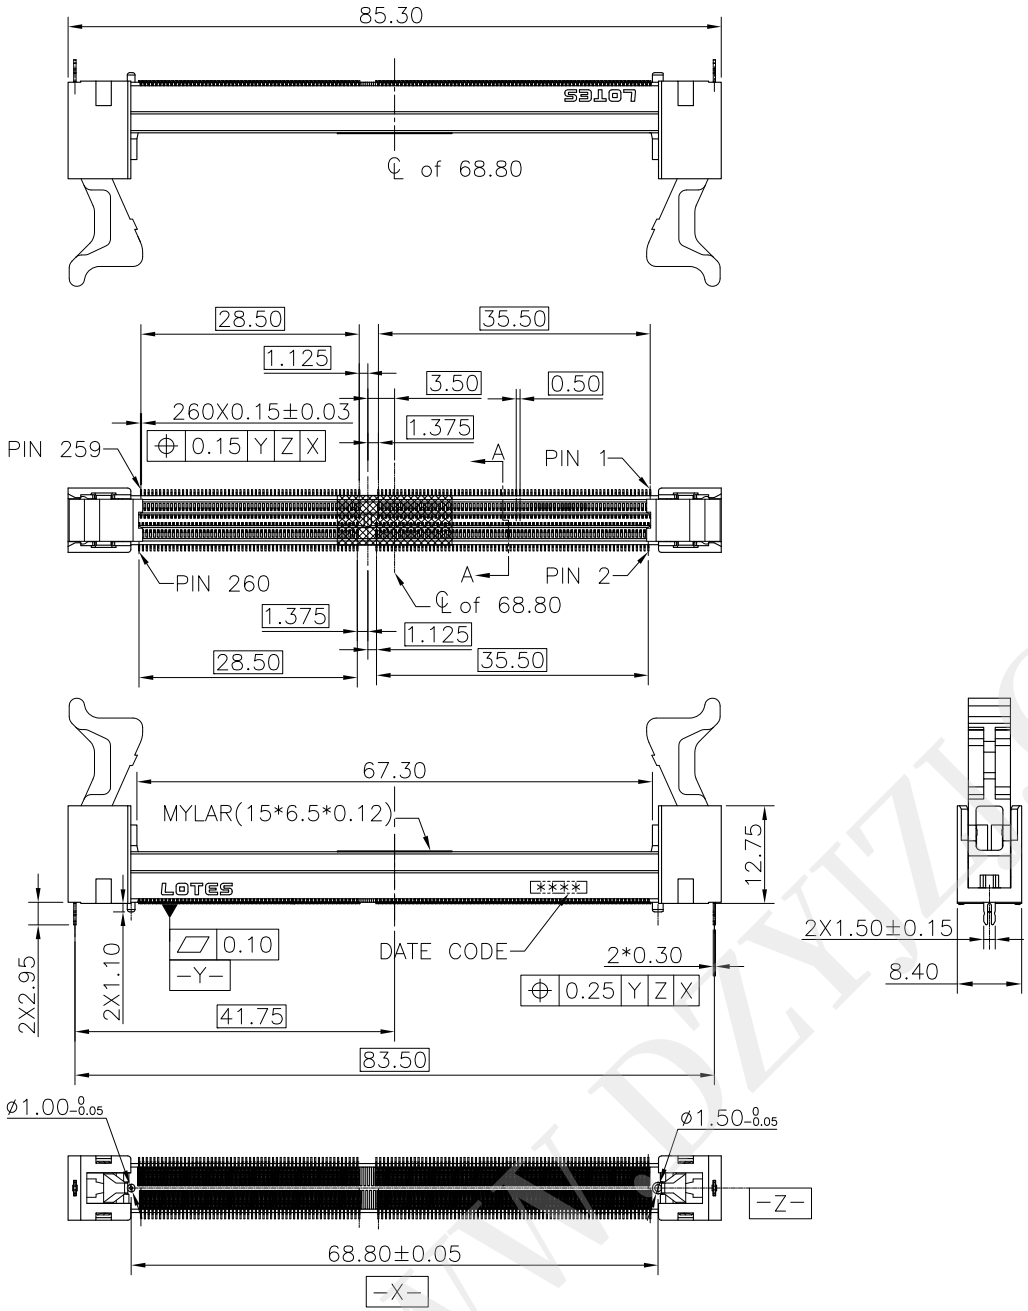


NOTES:


1. MATERIAL SPECIFICATION:
   1-1. HOUSING: LCP+40%GF,UL94V-0,COLOR: BLACK.
   1-2. CONTACTS:COPPER_C7025;
   1-3. HOOK: BRASS_C2680;
   1-4. EJECTOR: HIGH TEMPERATURE THERMOPLASTIC (SEE TABLE1), UL94V-0, COLOR: SEE TABLE1.
   1-5. MYLAR: INSULATOR MATERIAL, COLOR: BROWN,UL94V-0;
2. PLATING SPECIFICATION:
   2-1. CONTACT: NICKEL 50u" MIN. UNDER PLATING OVER ALL.MATTE TIN 100u" MIN. PLATING ON SOLDER AREA.GOLD PLATING SEE TABLE1.
   2-2. HOOK: NICKEL 50u" MIN. UNDER PLATING OVER ALL. MATTE TIN 100u" MIN. PLATING OVER ALL.
3. RoHS OR HF COMPLIANT;
4. DATE CODE: **** (WEEK / YEAR)
5. MECHANICAL PERFORMANCE:
   5-1. MATING FORCE: 11Kgf MAX..
   5-2. DURABILITY: 25 CYCLES.
6. ELECTRICAL PERFORMANCE:
   6-1. CURRENT: 0.50A MAX. PER PIN.
   6-2. VOLTAGE: 25V AC MAX..
   6-3. LLCR: 55mΩ MAX. (INITIAL); △20mΩ MAX. (FINAL).
   6-4. DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1 MINUTE.
   6-5. INSULATION RESISTANCE: DC 500V 500MΩ MIN..
7. RECOMMENDED PROCESS;
   THE TEMPERATURE SHALL BE 260±5°C MAINTAINING 10±1 SECONDS.

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. ADDR0075-P001C	LOTES
.X ± 0.35	X.° ± 3°		
.XX ± 0.25	.X° ± 2°	APPROVED BY DEFANG.HU	TITLE VERTICAL SODDR4 CONNECTOR
.XXX ±0.15	.XX° ± 1°		
CUSTOMER DRAWING		CHECKED BY LIMING.ZHANG	DWG NO. 808003411
SIZE A4	UNITS MM[INCH]	DRAWN BY RONGMEI.ZHANG	SHEET 1 / 5 · SCALE 1:1 · REV 1C


WWW.DZYIZI.COM


REV.	ECN NO./DESCRIPTION	DATE
1A	R190005	04/25'19
1B	R190005	07/10'19
1C	R190005	10/09'19

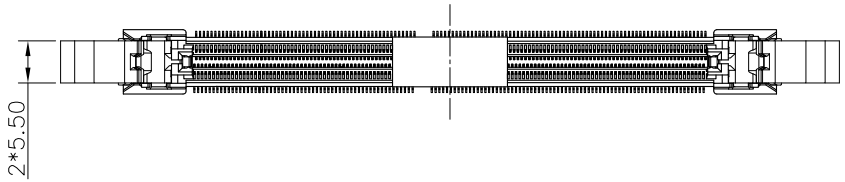

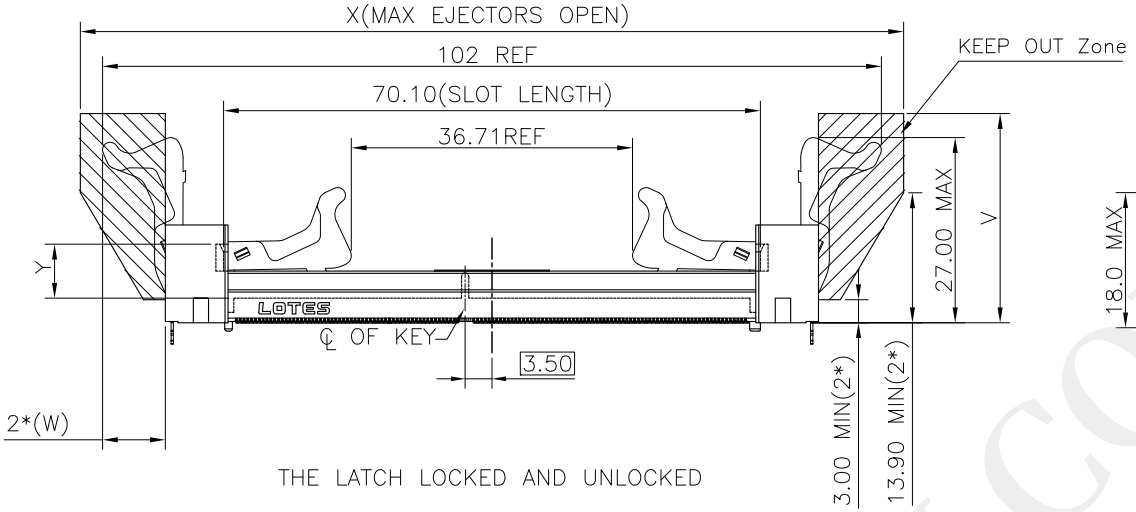

THE LATCH LOCKED AND UNLOCKED




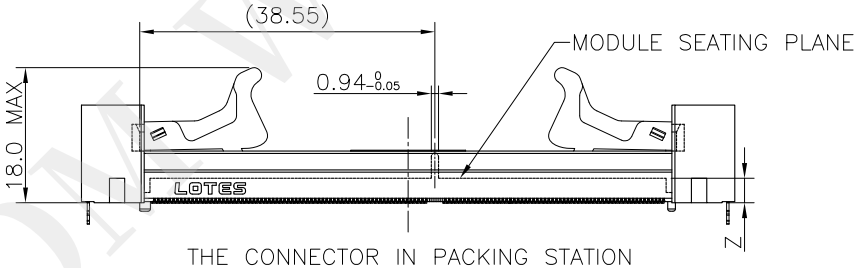

THE CONNECTOR IN PACKING STATION

NOTES:

1. A MININUM HEIGHT OF Y MEASURED TO THE HIGHEST POINT OF THE SOCKET TO MODULE ENGAGEMENT IS REQUIRED TO PREVENT THE MEMORY MODULE TILTING RELATIVE TO DATUM B OF THE SOCKET.
2. DIMENSION IS FROM THE BOTTOM OF THE SOCKET PCB REFERENCE,DATUM A,TO THE SEATING PLANE OF THE SODDR4 DIMM IN THE SOCKET.

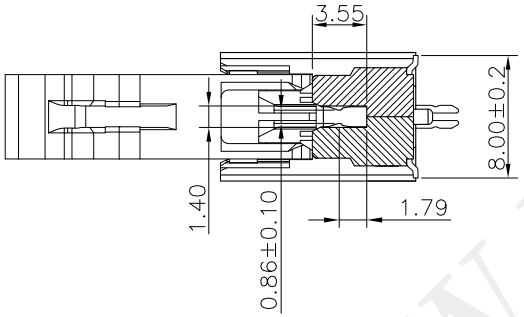

SECTION A–A
SCALE 2:1


TABLE 2:

VARIATIONS				
SYMBOL	MIN	NOM	MAX	NOTES
X			107.00	
Y	6.80			1
V			28.00	
W		8.5REF		
Z			3.55	2

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. ADDR0075-P001C	LOTES
.X ± 0.35	X.° ± 3°		
.XX ± 0.25	.X° ± 2°	APPROVED BY DEFANG.HU	TITLE VERTICAL SODDR4 CONNECTOR
.XXX ± 0.15	.XX° ± 1°		
CUSTOMER DRAWING		CHECKED BY LIMING.ZHANG	DWG NO. 808003411
SIZE A4	UNITS MM[INCH]	DRAWN BY RONGMEI.ZHANG	SHEET 2 / 5 · SCALE 1:1 · REV 1C


WWW.DZYJZ.COM

REV.	ECN NO./DESCRIPTION	DATE
1A	R190005	04/25'19
1B	R190005	07/10'19
1C	R190005	10/09'19

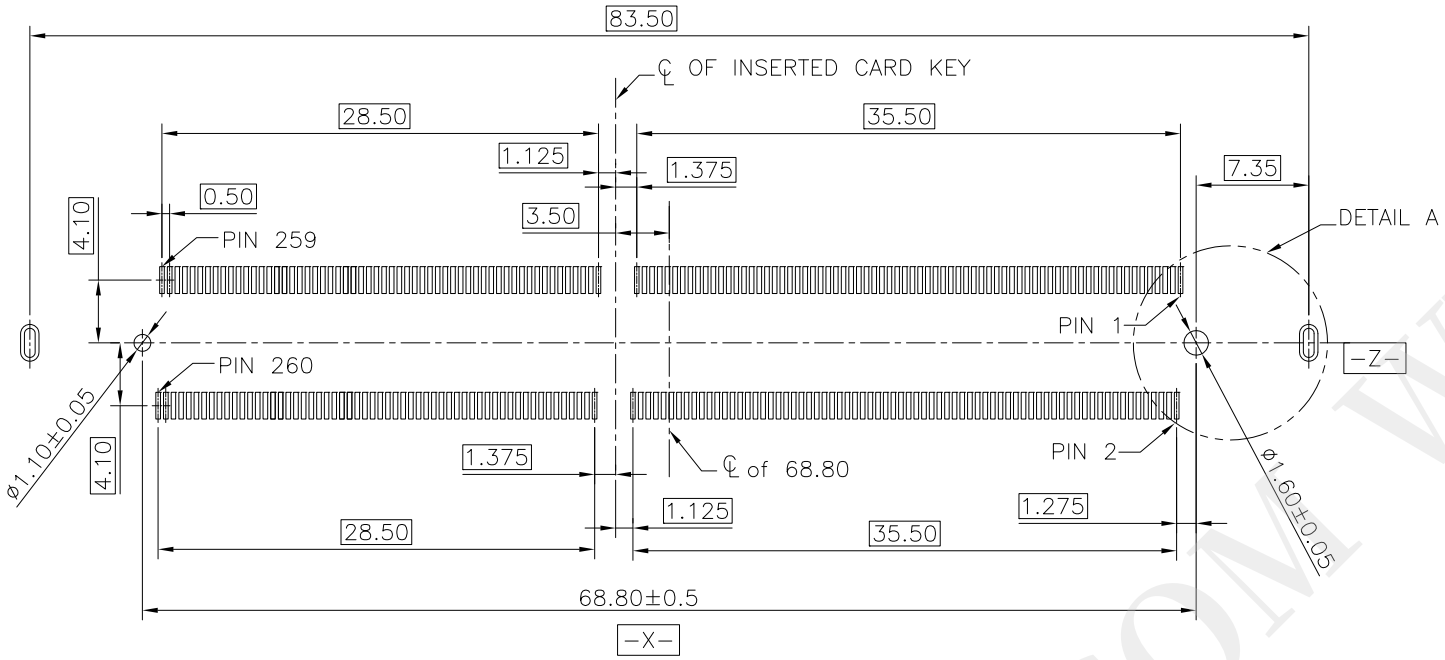

RECOMMENDED PCB LAYOUT (TOP VIEW)

DEFAULT TOLERANCES:±0.05MM

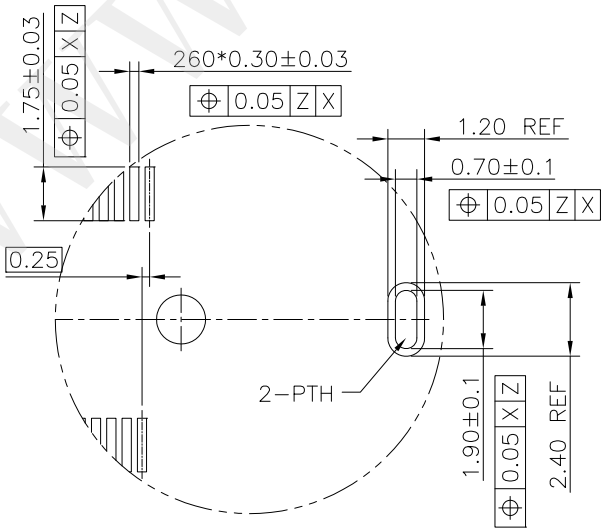

DETAIL A

SCALE 2:1


TABLE 1:


NO.	PART NO.	DESCRIPTION
1	808003411	LCP_BLACK,Au15u",EJECTOR WHITE

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO. ADDR0075–P001C	LOTES
.X ± 0.35	X.°± 3°		
.XX ± 0.25	.X°± 2°	APPROVED BY DEFANG.HU	TITLE VERTICAL SODDR4 CONNECTOR
.XXX ±0.15	.XX°± 1°		
CUSTOMER DRAWING		CHECKED BY LIMING.ZHANG	DWG NO. 808003411
SIZE A4	UNITS MM[INCH]	DRAWN BY RONGMEI.ZHANG	SHEET 3 / 5 · SCALE 2:1 · REV 1C


WWW.DZYJZ.COM

REV.	ECN NO./DESCRIPTION	DATE
1A	R190005	04/25'19
1B	R190005	07/10'19
1C	R190005	10/09'19

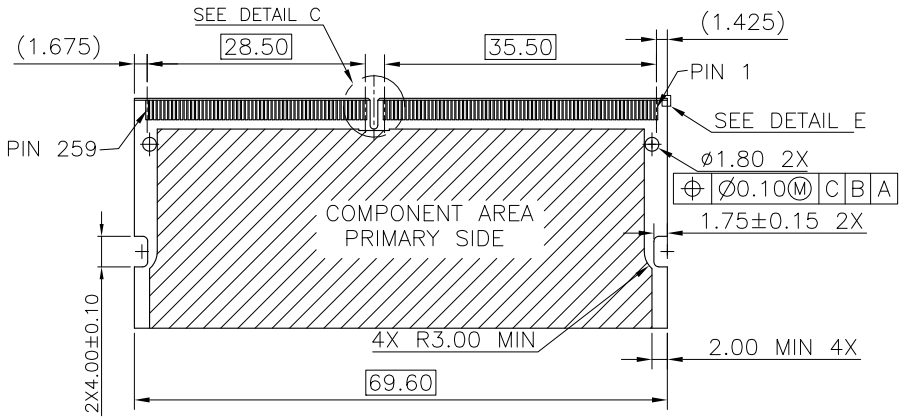


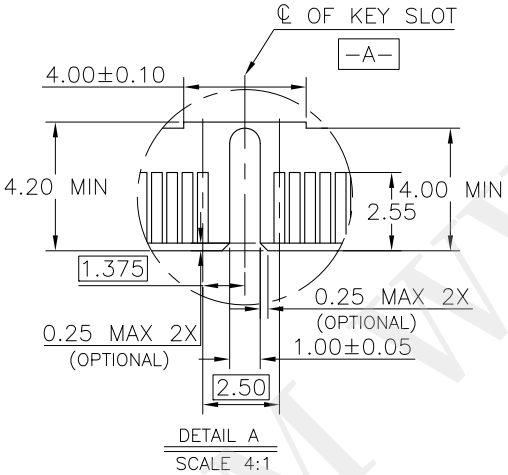


DETAIL A
SCALE 4:1

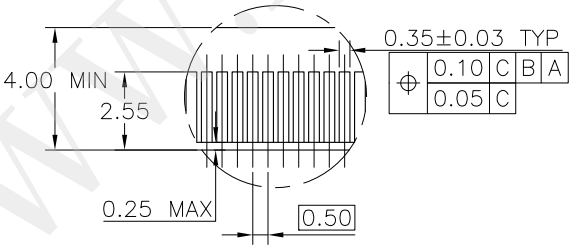


DETAIL B
SCALE 4:1

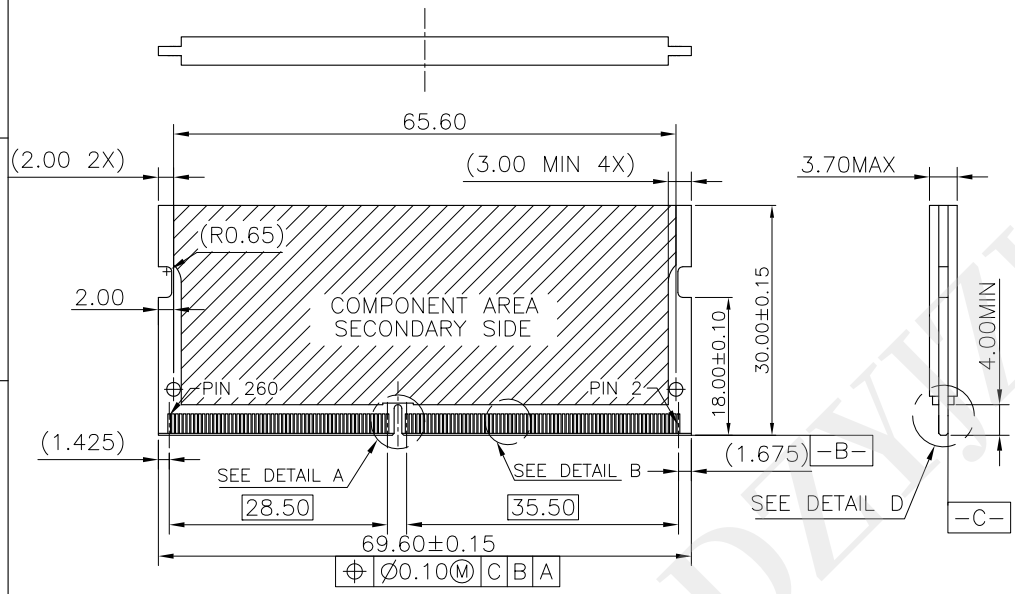


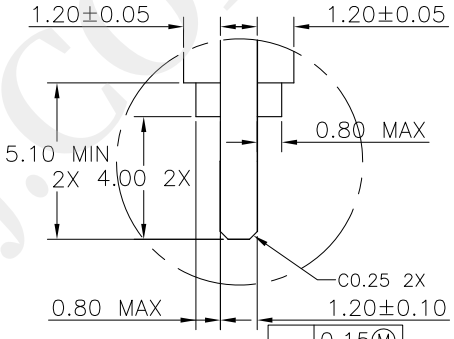

DETAIL D
SCALE 4:1

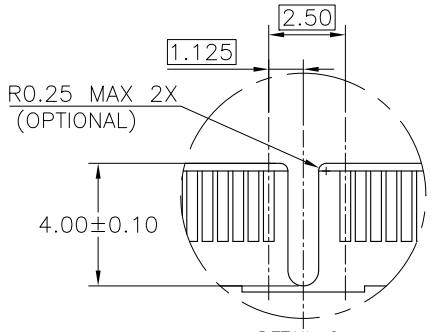

DETAIL C
SCALE 4:1

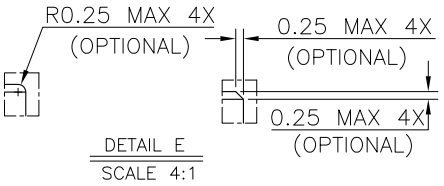

DETAIL E
SCALE 4:1


MATING P.C.B NOTES:


1. TOLERANCE ON ALL DIMENSIONS ±0.05 UNLESS OTHERWISE SPECIFIED;
2. PCB THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION;
3. FINISH OF PAD: Au PLATING 30u''min OVER Ni PLATING 80u'' MIN.;
4. NO BURR.
5. CHAMFER 0.25mm max. X 45° IF EXIST.


GENERAL TOLERANCES UNLESS SPECIFIED .X± 0.35 X.°± 3° .XX± 0.25 .X°± 2° .XXX±0.15 .XX°± 1°	PART NO. ADDR0075-P001C	LOTES	
CUSTOMER DRAWING	APPROVED BY DEFANG.HU	TITLE VERTICAL SODDR4 CONNECTOR	
	CHECKED BY LIMING.ZHANG	DWG NO. 808003411	
SIZE A4 / UNITS MM[INCH]	DRAWN BY RONGMEI.ZHANG	SHEET 4 / 5	SCALE 1:1 / REV 1C


WWW.DZYLJ.COM


REV.	ECN NO./DESCRIPTION	DATE
1A	R190005	04/25'19
1B	R190005	07/10'19
1C	R190005	10/09'19

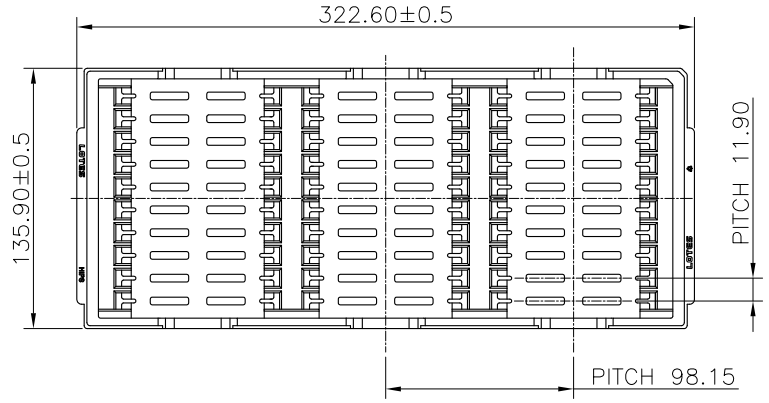

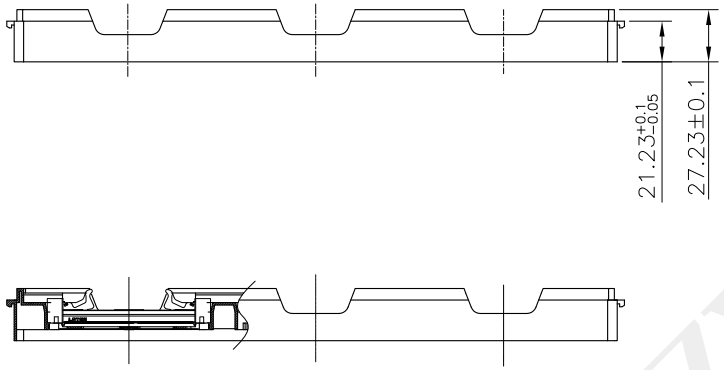

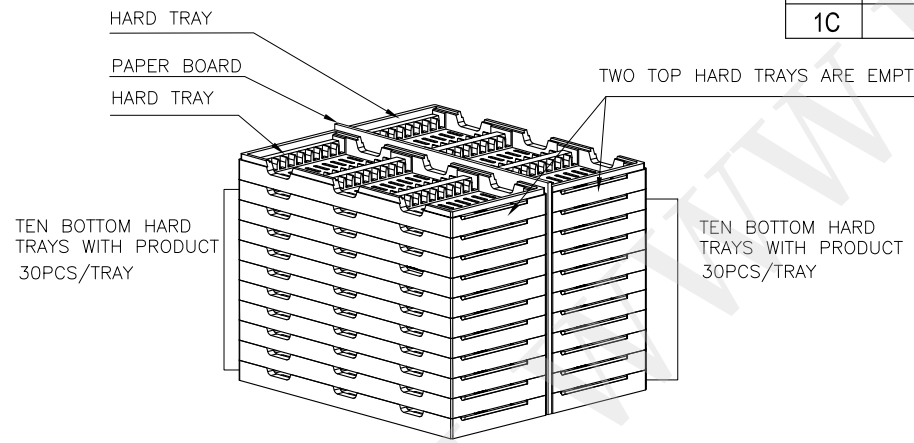

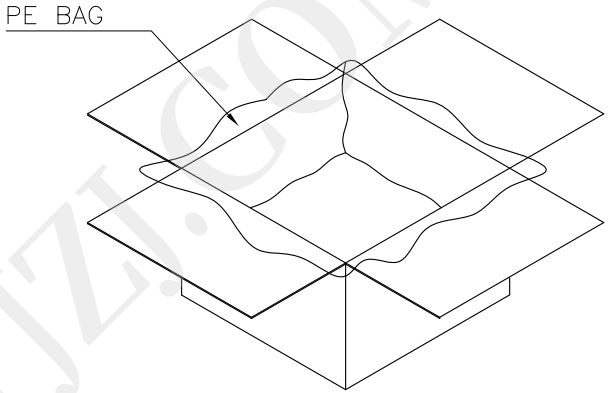

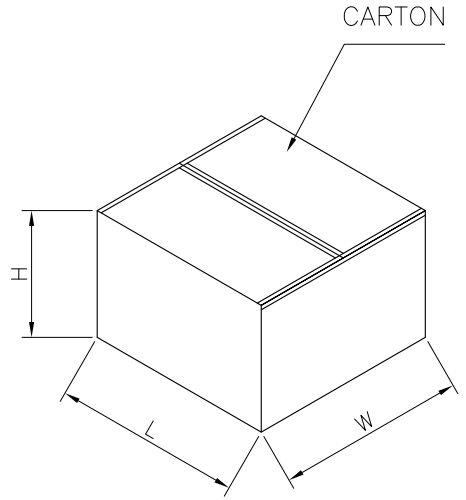

NO.	DESCRIPTION	PART NO.	SPECIFICATION	QT'Y
5	PE BAG	G09-6-50025-K01	520*500;T=0.15	2 PCS
4	CARTON	G09-1-30018-P02	338*295*265;K=K	1 PCS
3	PAPER BOARD	G09-3-30018-P01	300*270*6	3 PCS
2	HARD TRAY	G09-A-30164-K01	322.6*135.9*27.23;HIPS_BLACK	22 PCS
1	CONNECTOR	SEE TABLE 1	SEE TABLE 1	600 PCS

GENERAL TOLERANCES UNLESS SPECIFIED		PART NO.	LOTES
.X ± 0.35	X.° ± 3°	ADDR0075-P001C	
.XX ± 0.25	.X° ± 2°	APPROVED BY: DEFANG.HU	TITLE: VERTICAL SODDR4 CONNECTOR
.XXX ± 0.15	.XX° ± 1°		
CUSTOMER DRAWING		CHECKED BY: LIMING.ZHANG	DWG NO.: 808003411
SIZE: A4	UNITS: MM[INCH]	DRAWN BY: RONGMEI.ZHANG	SHEET: 5/ 5 · SCALE: 1:2 · REV: 1C

WWW.DZYJZ.COM