

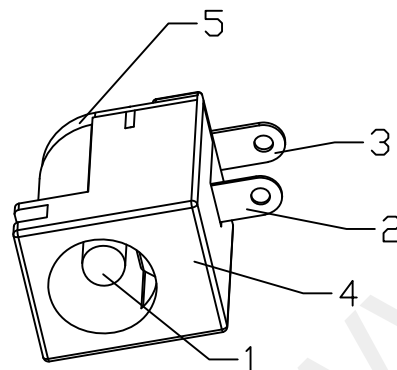
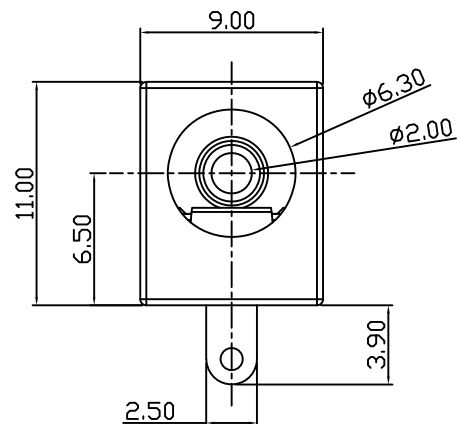
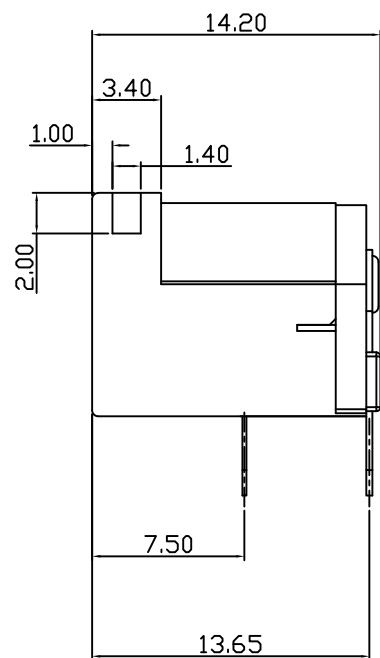


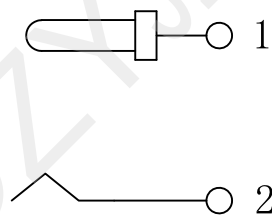

规格:

1. 定值: DC30V 2A
2. 接触电阻: $\leq 30\text{m}\Omega$
3. 绝缘电阻: $\geq 100\text{M}\Omega$
4. 耐电压: 500VAC
5. 插拔力: 3N~30N
6. 使用寿命: 5000次
7. 使用温度: $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$

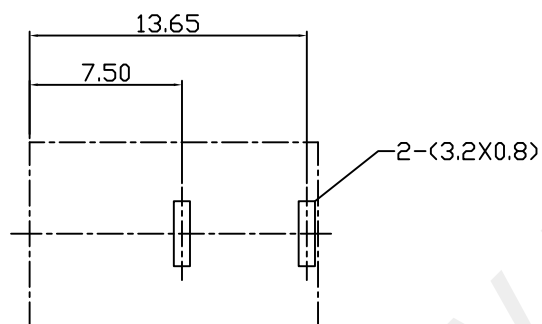

电路示意图

P.C.B 设计参考尺寸

6				
5	后盖	PBT	1	黑色
4	主体	PBT	1	黑色
3	平片	黄铜 T=0.3mm	1	镀铜锡
2	弹片	磷铜 T=0.25mm	1	镀铜锡
1	PIN针	黄铜	1	镀铜锡
序号	名称	材料	数量	颜色/电镀



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-005B 2P	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DC005B2P-200	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2510161556	SHEET NO. 1 OF 1