



主要技术性能

额定电负荷	DC 30V\0.5A
接触电阻	$\leq 0.03\Omega$
绝缘电阻	$\geq 100M\Omega$
耐 压	AC500V(50Hz)/min
插 拔 力	3-20N
使用温度范围	-30-70℃
使用寿命	5000次

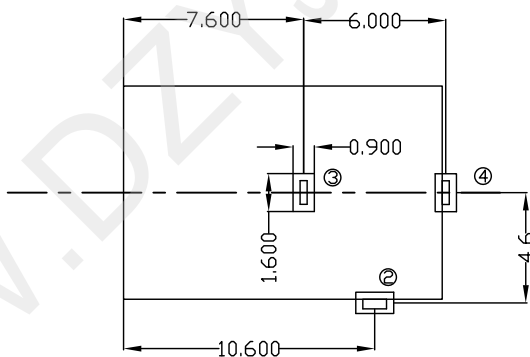

6	DC-005G-06	后盖	1	PBT(黑色)		
5	DC-005G-05	基座	1	PBT(黑色)		
4	DC-005G-04	平片	1	黄铜	0.30T	镀银
3	DC-005G-03	弹片	1	磷铜	0.3T	镀银
2	DC-005G-02	弯钩	1	黄铜	0.4T	镀银
1	DC-005G-01	圆针	1	紫铜		铜锡
序号	产品编号	产品名称	数量	材 料	规 格	电 镀



深圳市华宇创精密电子有限公司

<p>TOLERANCE:                  X.X <math>\pm 0.30</math>                  X.XX <math>\pm 0.25</math>                  X.XXX <math>\pm 0.15</math>                  X' <math>\pm 2'</math> X.X' <math>\pm 0.5'</math></p> <p>UNIT: mm [inch]                  SCALE: 1:1 SIZE: A4</p>	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-005G
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. : HVC-DC005G-200
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO. : HVC-2407271959
			SHEET NO. : 1 OF 1