
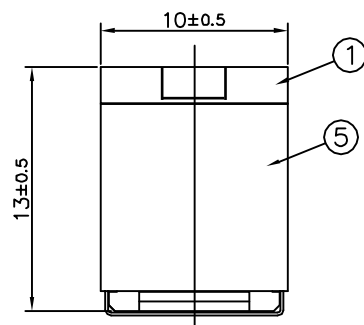
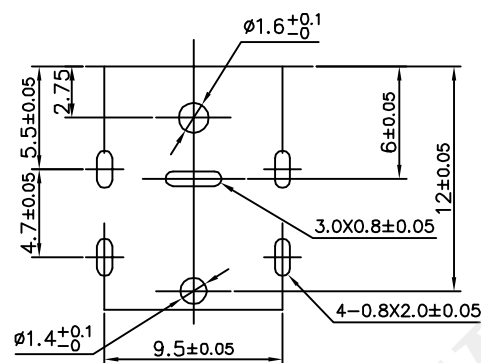





SCHEMATIC

PIN	2.0	2.5
-----	-----	-----

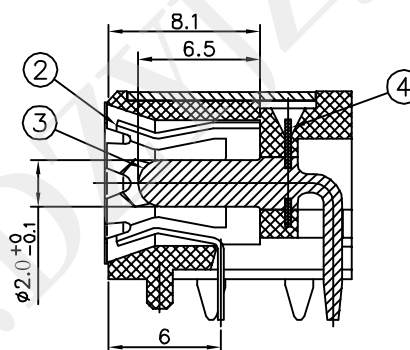

PCB MOUNTING HOLES

BOTTOM VIEW
(TOLERANCE: ±0.05)

主要技术性能

1. 额定电负荷: 24V•10A;
2. 接 触 电 阻: $\leq 0.03 \Omega$;
3. 绝 缘 电 阻: $\geq 100M\Omega$;
 n ;
4. 耐 压: AC500V (50Hz)/mi
5. 插 拔 力: 3~25N;
6. 寿 命: 5,000次。



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-007B
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DC007B-XXX
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4			DRAW NO: HYC-DC17111715
			SHEET NO. 1 OF 1