



SCHEMATIC

主要技术性能	
额定电负荷	DC 30V\0.5A
接触电阻	≤0.03Ω
绝缘电阻	≥100MΩ
耐 压	AC500V(50Hz)/min
插 拔 力	3-20N
使用温度范围	-30-70℃
使用寿命	5000次

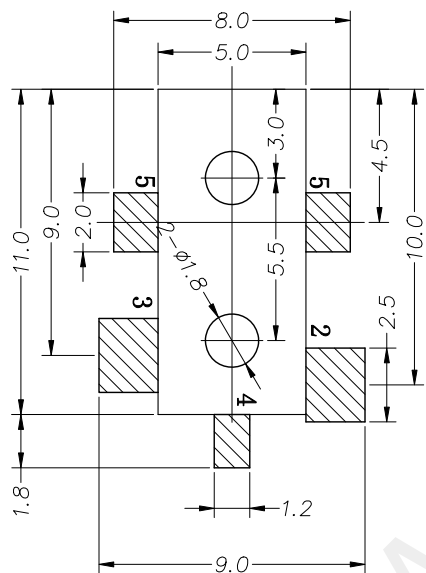

P. C. B LAYOUT TOP VIEW

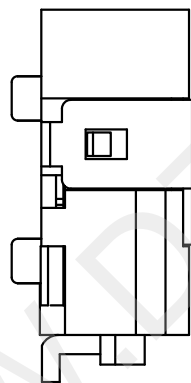

序号	产品编号	产品名称	数量	材 料	规 格	电 镀
5	DC-011C-05	盖脚	1	黄铜	0.30T	镀银
4	DC-011C-04	弯钩	1	黄铜	0.25T	镀银
3	DC-011C-03	弹片	1	锰钢	0.25T	镀银
2	DC-011C-02	平片	1	黄铜	0.30T	镀银
1	DC-011C-01	基座	1	PPA(黑色)		



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-011C 五脚贴片	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DC011C-126	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 柯南	DATE : 2014-02-23	DRAW NO: HYC-1901061139	SHEET NO. 1 OF 1