

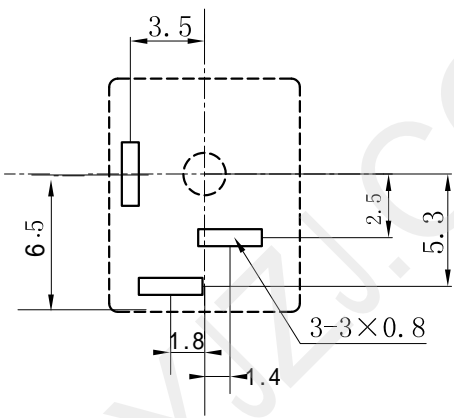


主要技术性能

1. 额定电负荷: 30V 0.5A;
2. 接触电阻: $\leq 0.03 \Omega$;
3. 绝缘电阻: $\geq 100M\Omega$;
4. 耐压: AC500V(50Hz)/min;
5. 插拔力: 3~20N;
6. 寿命: 5,000
7. 使用条件: $-30\sim 70^{\circ}C$

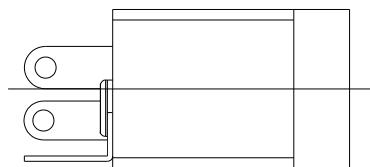

线路板开孔尺寸



电路原理图

PIN	$\phi 1.65$	$\phi 2.0$	$\phi 2.5$
APPO			

序号	名称	数量	材料	备注
1	底座	1	PBT	黑色
2	弹片	1	锰钢(磷铜) T=0.20	锡铈
3	平片	1	H62黄铜带 T=0.30	铜锡
4	盖板	1	酚醛胶版	黄色
5	中心针	1	H62黄铜棒	铜锡
6	插片	1	H62黄铜带 T=0.30	铜锡



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-012	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DC012-XXX	MOLD NO.
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2210141745	SHEET NO. 1 OF 1