


RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm(TOP VIEW)

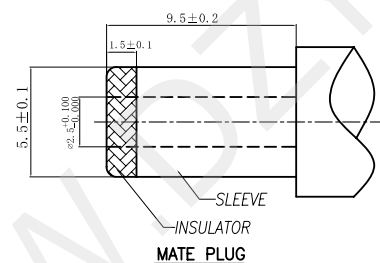

主要技术性能

1. 额定电负荷: 30V 0.5A;
2. 接触电阻: $\leq 0.03 \Omega$;
3. 绝缘电阻: $\geq 100M \Omega$;
4. 耐压: AC500V(50Hz)/min;
5. 插拔力: 3~20N;
6. 寿命: 5,000次。

6	COVER	1	PBT UL94V-0	BLACK	
5	SPRING TERMINAL	2	QSn6.5-0.1 t=0.25	CuSn-Plated	
4	BREAK TERMINAL	3	H62 t=0.30	CuSn-Plated	
3	TERMINAL	1	H62 t=0.35	CuSn-Plated	
2	CENTER PIN	1	H59 DIA=2	CuSn-Plated	
1	HOUSING	1	PBT UL94V-0	BLACK	
NO.	PART NAME	TER'NO.	Q'TY	MATERIAL	PLATING & COLOR



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-013D 弯脚	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DC013D-200	MOLD NO. /
 UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2510211135	SHEET NO. 1 OF 1
	SCALE:1:1 SIZE: A4			