


PIN	Ø.0	Ø.5
APPD.		


L =	5.5	8.5
-----	-----	-----

SPECIFICATION

- 1.Rating : DC 30V 0.5A;
- 2.Contact resistance : ≤0.03Ω;
- 3.Insulation resistance : ≥100MΩ (DC250V);
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N;
- 6.life test: 5,000 cycles。

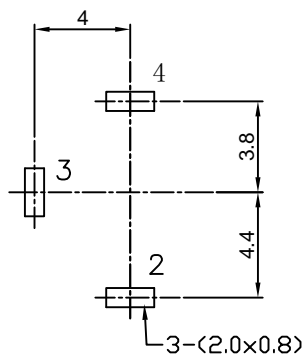

**P.C.B LAYOUT
TOP VIEW**



SCHEMATIC

6	PIN	1	H62 BRASS(ROHS)	Sn-Plating(ROHS)
5	AXIS SUPPORT	1	H59 BRASS(ROHS)	Ni-Plating(ROHS)
4	FLAT PIECE	1	H62 BRASS(ROHS)	Ag-Plating(ROHS)
3	SPRING PIECE	1	C5191(ROHS)	Ag-Plating(ROHS)
2	CURVE PIECE	1	H62 BRASS(ROHS)	Ag-Plating(ROHS)
1	HOUSING	1	PPA(ROHS)	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC JACK
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC01-DC025M-55/85-XXX MOLD NO.
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2207141829 SHEET NO. 1 OF 1
UNIT: mm [inch] SCALE: 1:1 SIZE: A4			