



主要技术性能

1. 额定电负荷: 30V·2A;
2. 接触电阻: $\leq 0.02 \Omega$;
3. 绝缘电阻: $\geq 100m\Omega$;
4. 耐压: AC250V (50Hz) min;
5. 插拔力: 3-15N;
6. 寿命: 5,000次。

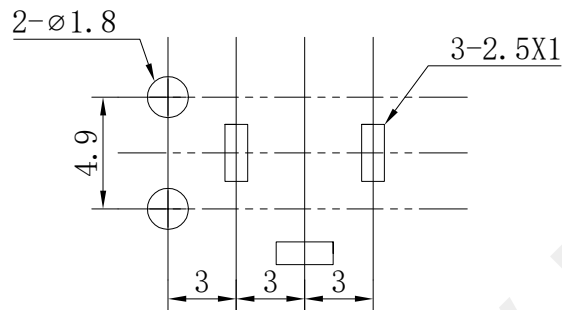

线路板开孔尺寸
P.C.B LAYOUT

按点示意图
SCHEMATIC



4	插针脚	1	H62黄铜带T=0.5	锡铈
3	弯片	1	H62黄铜带T=0.5	锡铈
2	弹片	1	磷铜65=0.25	锡铈
1	底座	1	PPA	(黑)
序号	名称	数量	材料	镀涂



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-038 小孔	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DC038-110	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-DC19112556	SHEET NO. 1 OF 1