




电路板开孔尺寸

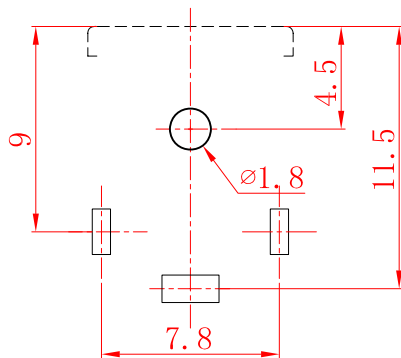


主要技术性能

1. 额定电负荷: 30V 0.5A;
2. 接触电阻: $\leq 0.03 \Omega$;
3. 绝缘电阻: $\geq 100M \Omega$;
4. 耐压: AC500V (50Hz)/min;
5. 插拔力: 3~20N;
6. 寿命: 5,000次。

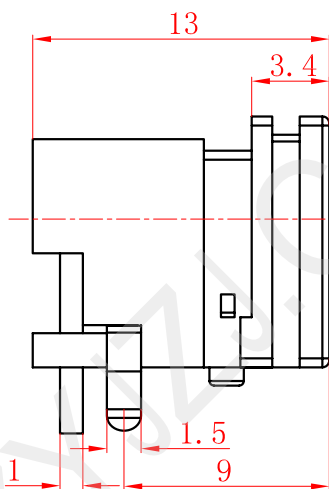

电路原理图



序号	名称	数量	材料	备注
4	弯片	1	H62黄铜带(Y) $\delta=0.40mm$	锡铈
3	簧片	1	QSn6.5-0.1锡青铜带 $\delta=0.30mm$	锡铈
2	插针	1	H62黄铜棒	锡铈
1	基座	1	PA66	黑



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-039	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DC039-160	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-192005173	SHEET NO. 1 OF 1