


主要技术性能	
额定电负荷	DC 30V\0.5A
接触电阻	≤0.03Ω
绝缘电阻	≥100MΩ
耐压	AC500V(50Hz)/min
插拔力	3-20N
使用温度范围	-30-70℃
使用寿命	5000次

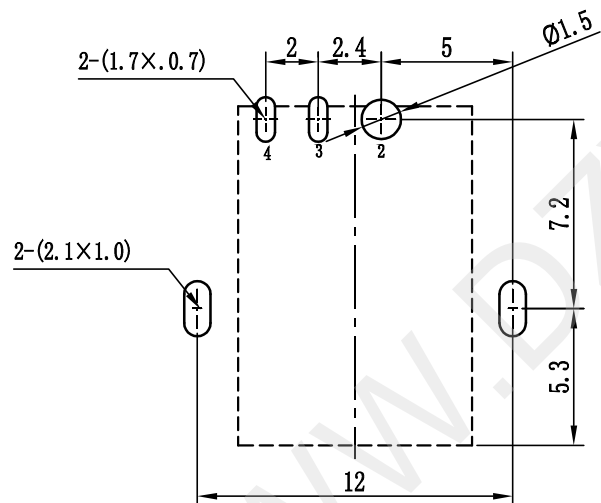

P. C. B LAYOUT
TOP VIEW

序号	产品名称	数量	材料	规格	电镀
5	外壳	1	SPCC	T=0.4	镀镍
4	弹片	1	磷铜	T=0.3	镀银
3	插片	1	黄铜	T=0.3	镀银
2	圆针	1	黄铜	Ø1.65	镀银
1	基座	1	PPA	黑色	

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-044H
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DC044H-165
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2201071451
			SHEET NO. 1 OF 1