


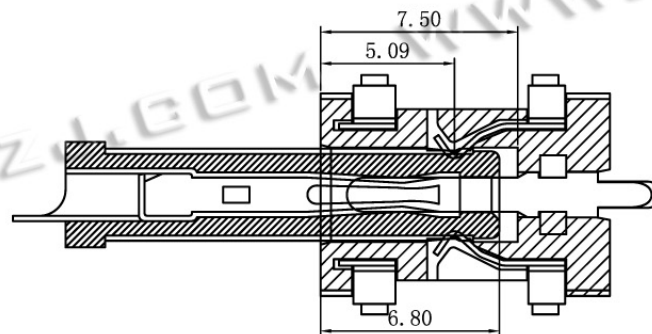
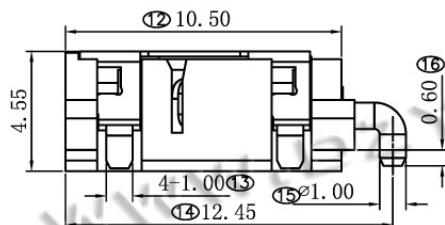






DC JACK INSERT DEPTH



ELECTRICAL CIRCUIT

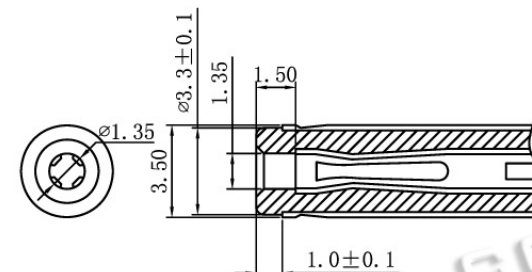

MATE PLUG

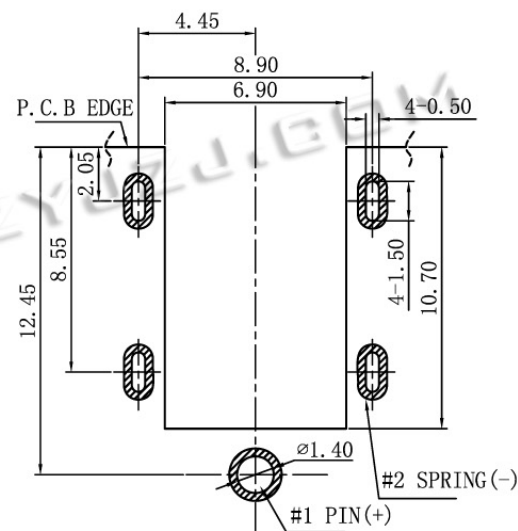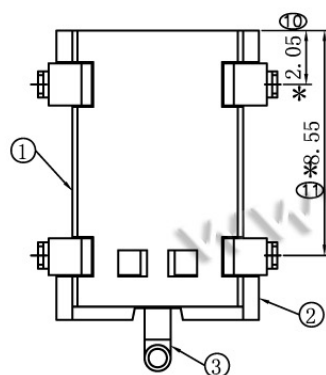

RECOMMENDED PCB LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - RATING: 24V 3A
 - CONTACT RESISTANCE: 30mΩ MAX. (INITIAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 0.3~3.0 KGF
 - WITHDRAWAL FORCE: 0.3~3.0 KGF
- LIFE TEST: 5,000 CYCLES MIN.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- * REPRESENT CRITICAL DIMENSIONS.
- ▽ CPK CONTROLLED DIMENSIONS.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-045A 1.3针
CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DC045A-130	MOLD NO.
APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-DC1906121043	SHEET NO. 1 OF 1