

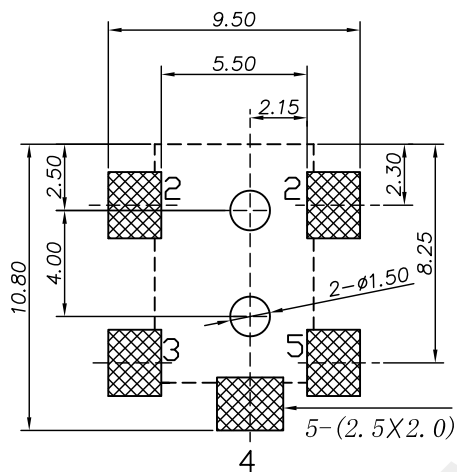

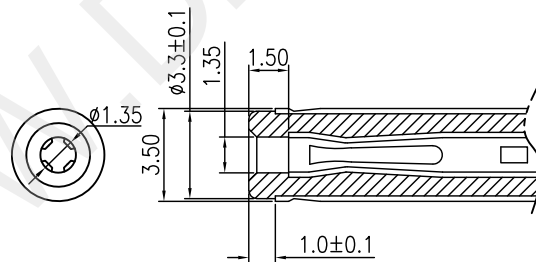


PIN 1.0 1.6



P. C. B LAYOUT TOP VIEW



主要技术性能	
额定电负荷	DC 30V\2A
接触电阻	≤0.03Ω
绝缘电阻	≥100MΩ
耐压	AC500V(50Hz)/min
插拔力	3-30N
使用温度范围	-30~70℃
使用寿命	5000次

序号	产品名称	数量	材料	规格	电镀
6	圆针	1	黄铜		镀银
5	平片	1	磷铜	0.25T	镀银
4	插片	1	磷铜	0.25T	镀银
3	弹片	1	磷铜	0.30T	镀银
2	盖脚	1	黄铜	0.25T	镀银
1	底座	1	PPA/PA9T(黑色)		



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-046
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC-DC046-XXX
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-220851144
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1