



P.C.B LAYOUT
TOP VIEW

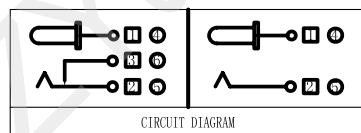

03	∅ 1.65	∅ 2.0	∅ 2.5
----	--------	-------	-------

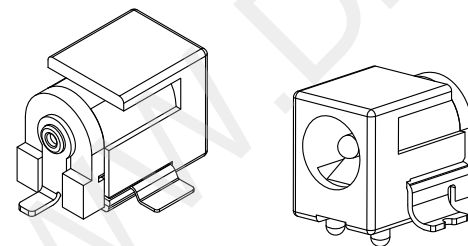

主要技术性能


1. 额定电负荷: 30V 3A;
2. 接触电阻: $\leq 0.03\Omega$;
3. 绝缘电阻: $\geq 100M\Omega$;
4. 耐压: AC500V(50Hz)/min;
5. 插拔力: 3~20N;
6. 寿命: 5,000次。

6	弯片脚	1	黄铜 T=0.5mm	镀银
5	弹片脚	1	磷铜 T=0.25mm	镀银
4	平片脚	1	磷铜 T=0.5mm	镀银
3	圆针	1	黄铜棒	镀镍
2	后盖	1	LCP	黑色
1	基座	1	LCP	黑色
序号	名称	数量	材料	备注



深圳市华宇创精密电子有限公司

TOLERANCE:
X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X' ±2' X.X' ±0.5'



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :
陈一鸣

CHECKED BY :
马跃

APPROVED BY :
邱敏

DATE :
2014-02-23

DATE :
2014-02-23

DATE :
2014-02-23

PART NAME:
DC-067

PART NO. HYC-DC067-XXX

DRAW NO: HYC-2103021538
SHEET NO. 1 OF 1