



SPECIFICATION:

- 1,CURRENT RATING:DC 12V 0.3A.
- 2,DIELECTRIC WITHSTANDING VOLTAGE:
500V AC R.M.S. FOR ONE MINUTE.
- 3,INSULATION RESISTANCE:100M OHMS MIN.
AT 500V DC
- 4,CONTACT RESISTANCE:30m OHMS MAX.
- 5,OPERATING TEMPERATURE:-20°C TO +80°C.
- 6,OPERATING LIFE:5,000 CYCLES.



SCHEMATIC CIRCUIT

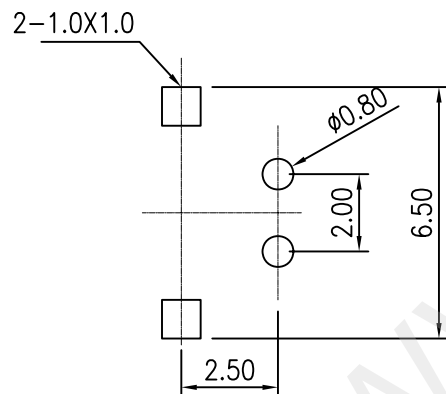

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-096E全贴
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DC096E-050
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-DC16041915
			SHEET NO. 1 OF 1