

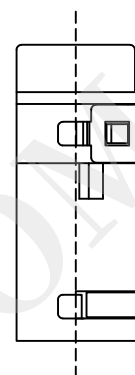
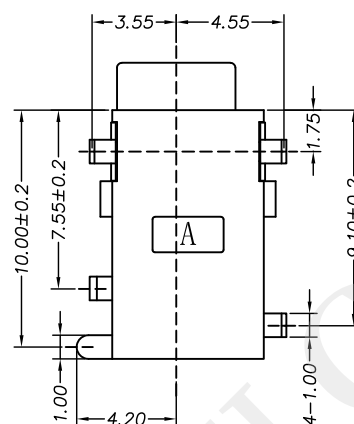
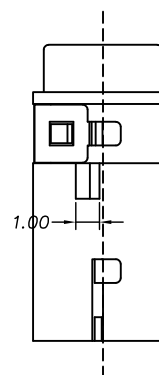



SCHEMATIC

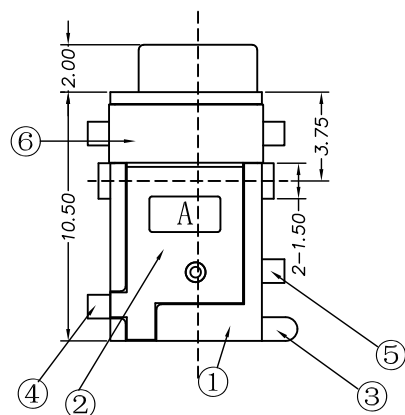

主要技术性能	
额定电负荷	DC 30V\1A
接触电阻	≤0.03Ω
绝缘电阻	≥100MΩ
耐压	AC500V (50Hz)/min
插拔力	3-30N
使用温度范围	-30~70℃
使用寿命	5000次

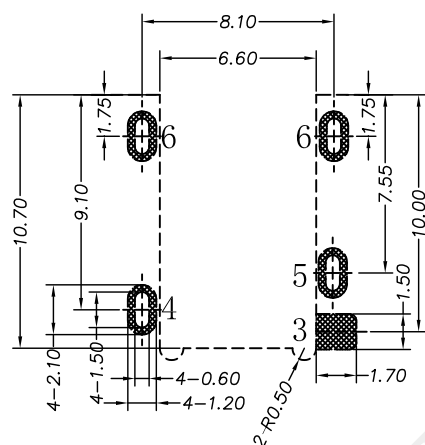

P.C.B LAYOUT TOP VIEW

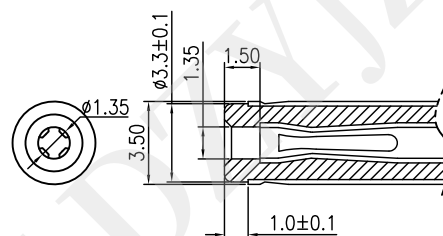

6	DC-097-06	盖脚	1	黄铜	0.2T	镀银
5	DC-097-05	插片	1	黄铜	0.3T	镀银
4	DC-097-04	弹片	1	磷铜	0.2T	镀银
3	DC-097-03	圆针	1	黄铜	0.3T	镀银
2	DC-097-02	塑盖	1	PPA(黑色)		
1	DC-097-01	基座	1	PPA(黑色)		
序号	产品编号	产品名称	数量	材料	规格	电镀



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-097沉板
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DC097-255
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2409231441
			SHEET NO. 1 OF 1