

NOTES:

- HOUSING: LCP (UL94V-0), BLACK.
- TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA, TIN PLATED ON SOLDER TAILS. NICKEL PLATED OVERALL.
- SHELL: STAINLESS STEEL, T=0.30mm, NICKEL PLATED OVERALL.


SPECIFICATION

- CURRENT RATING: 0.5A MAX .
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE: 100MΩ MIN.AT 500V DC.
- CONTACT RESISTANCE: 30mΩ MAX.
- OPERATING TEMPERATURE: -25°C TO +85°C.
- DURABILITY: 10000 CYCLES.
- MATING FORCE: 4.5kgf MAX.
- UNMATING FORCE: 1.0kgf MIN.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DP 侧插母座
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. : HVC38-DP20-260
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO. : HVC-2308101653
			SHEET NO. : 1 OF 1




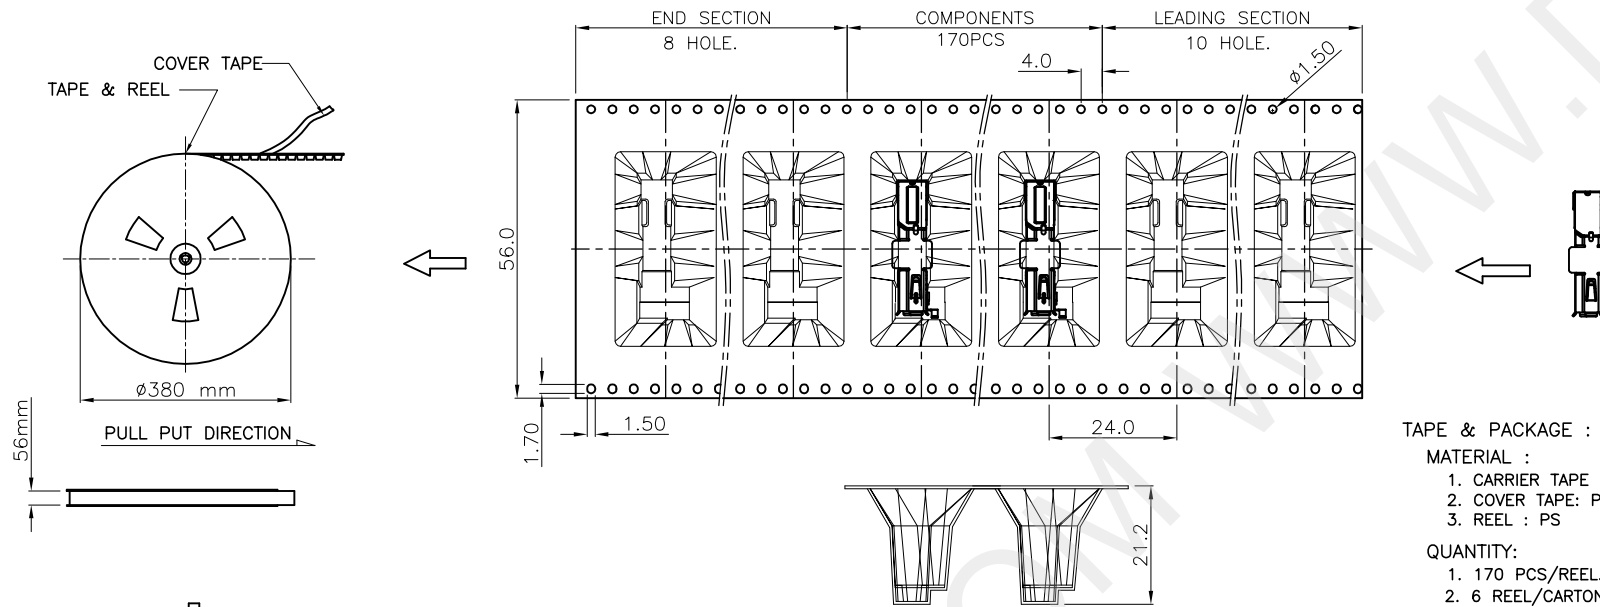




TAPE & PACKAGE :

- MATERIAL :**
1. CARRIER TAPE : PS
 2. COVER TAPE: PET
 3. REEL : PS

- QUANTITY:**
1. 170 PCS/REEL.
 2. 6 REEL/CARTON: 1020PCS.

- DIMENSION :**
- REEL SIZE :
DIA=380.0mm, W=56.0mm
- CARTON :
L=400mm, W=400mm, H=400mm

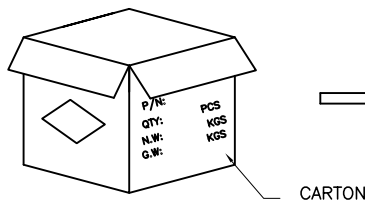

 深圳市华宇创精密电子有限公司			
TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: