Objective

The objective of this document is to provide guidance on how to make the GPS connect to the PCBA.


Requirements

- 2× SHR-08V-S-B (8-pin connector)
- 8 × 30 AWG wires (250 mm)

Cable

Check the connections as shown below.

Note: Red and black indicate VCC and ground, respectively. The other colors are used only to show the connections.

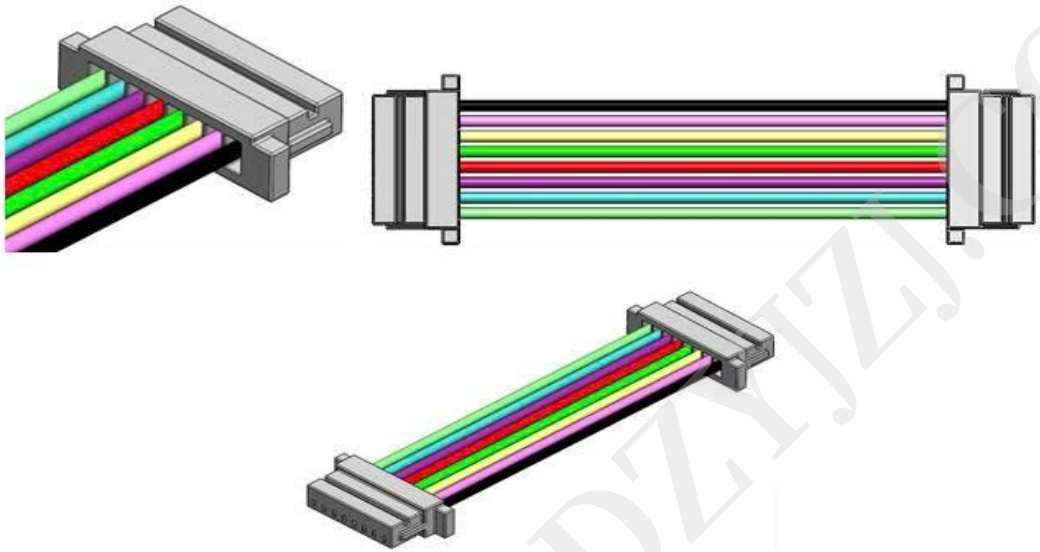

深圳市华宇创精密电子有限公司			
TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 1571-30号 长250MM 双头1.0-8P PIN1黑色,PIN5红色
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DZX99
UNIT: mm [inch]			MOLD NO.
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2611021640
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM