
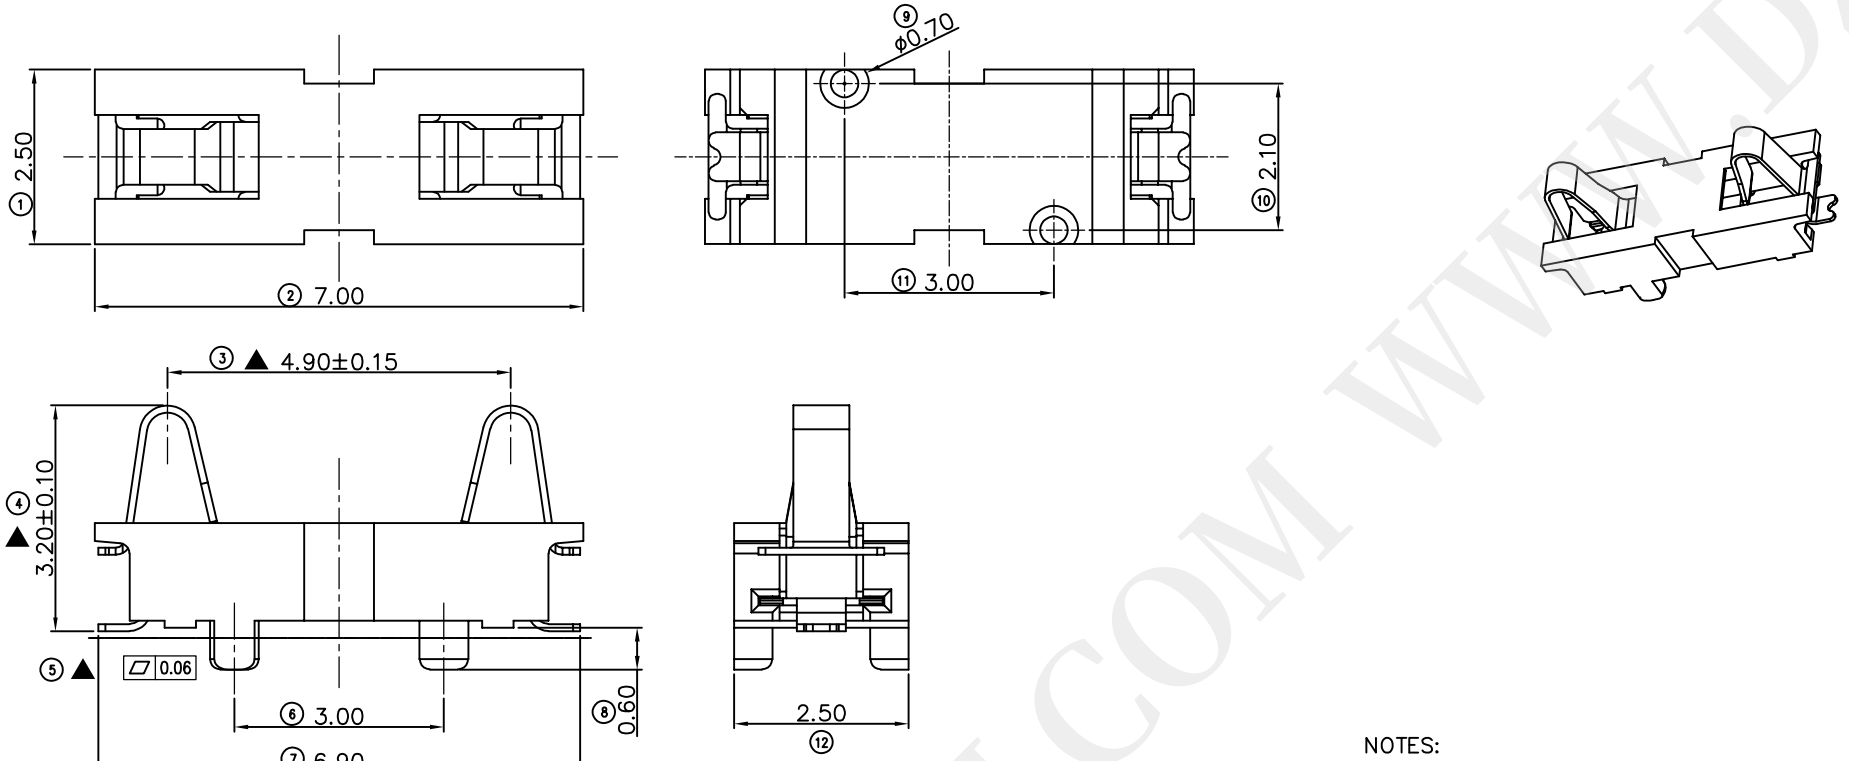


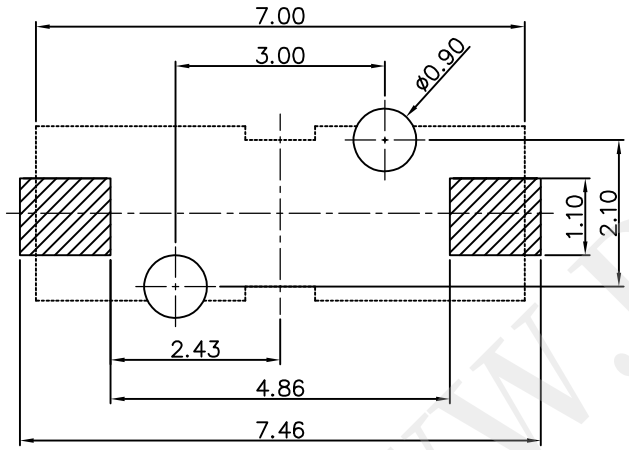

Recommended PCB board layout
Size tolerance: ± 0.05


NOTES:
1) MATERIAL:
1-1 HOUSING: THERMOPLASTIC LCP UL 94V-0,COLOR: WIHITE
1-2 CONTACT: SUS304 T=0.10mm
2) FINISH:
CONTACT: G/G PLATING ON SOLDERTAILS
50u"MIN.Ni UNDERPLATING
3) PRODUST SPECIFICATIONS;
3-1 VOLTAGE RATING: 30V
3-2 CURRENT RATING: 0.5A
3-3 CONTACT RESISTANCE; 30 milliOHM(Initial) Max.
3-4 INSULATION RESISTANCE: 100 MEGOHM Min.
3-5 OPERATION TEMPERATURE: -25° TO +85°
3-6 CONTACT NORMAL FORCE 40~80gf

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 电池座弹片 2PIN 3.2H 正向柱
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-TXT692532B
UNIT: mm [inch]			MOLD NO.
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2412311445
SCALE:1:1	SIZE: A4		SHEET NO. 1 OF 1


WWW.DZYJZJ.COM


www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267

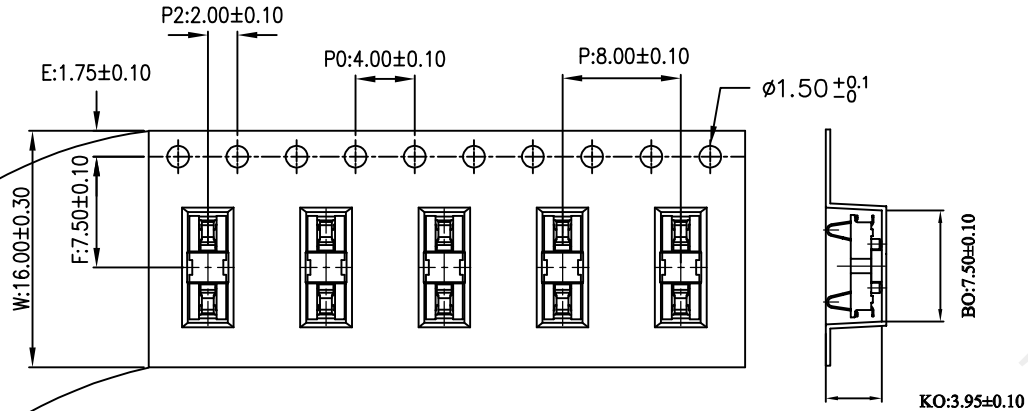


1. Packaging requirements:
   1.1. Use cold sealing belt width 16MM, self-adhesivecover belt width 12.8MM, coil width 16MM, size 330MM
   1.2. Quantity of finished products per volume 2000PCS
   1.3. Each package 17 volumes per box, box number 34000PCS
   1.4. The corner protection with the height of ROHS, REACH,HF halogen free and other domestic and international environmental protection requirements
2. Packaging requirements:
   2.1. Net weight: 1.0KG
   Gross weight: 6.8KG

The carrier is cold sealed package with stripping angle 165–180

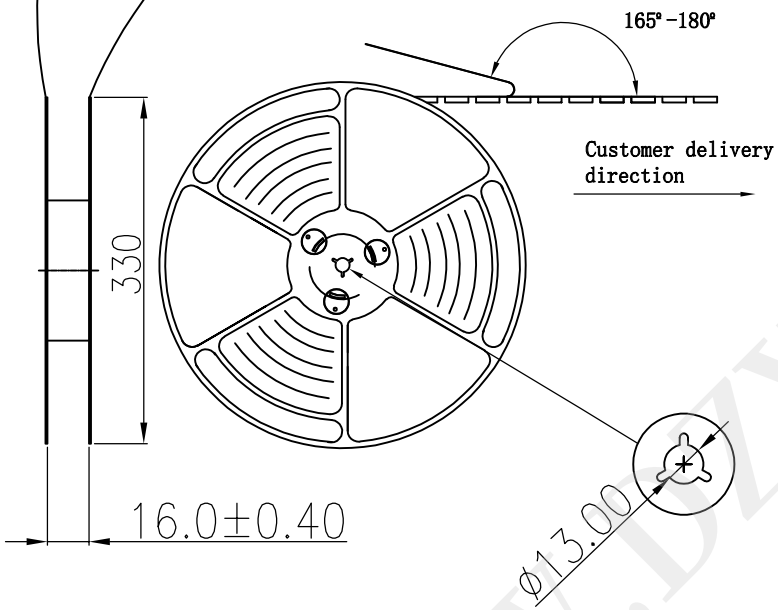



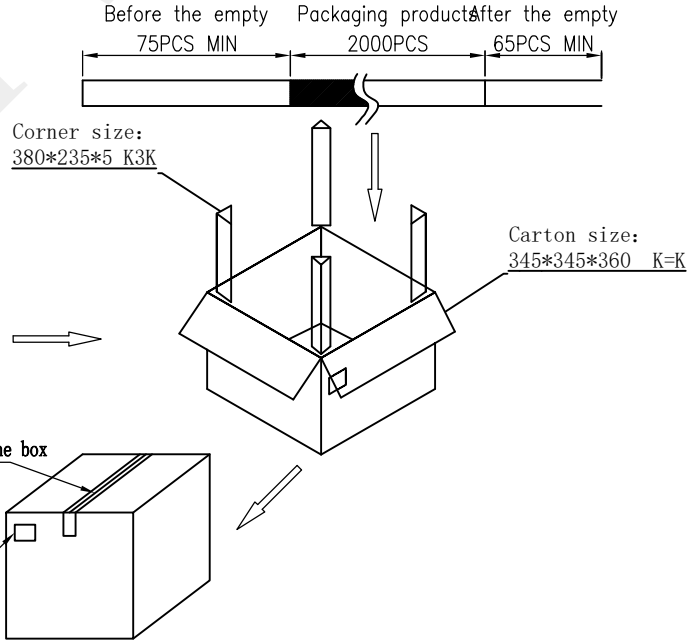

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X' ±0.5'	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. / MOLD NO.
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: / SHEET NO. 1 OF 1
SCALE:1:1 SIZE: A4			

WWW.DZYJZJ.COM