


www.twhoau.com Tel:0755-27575531 Fax:0755-27576267-805

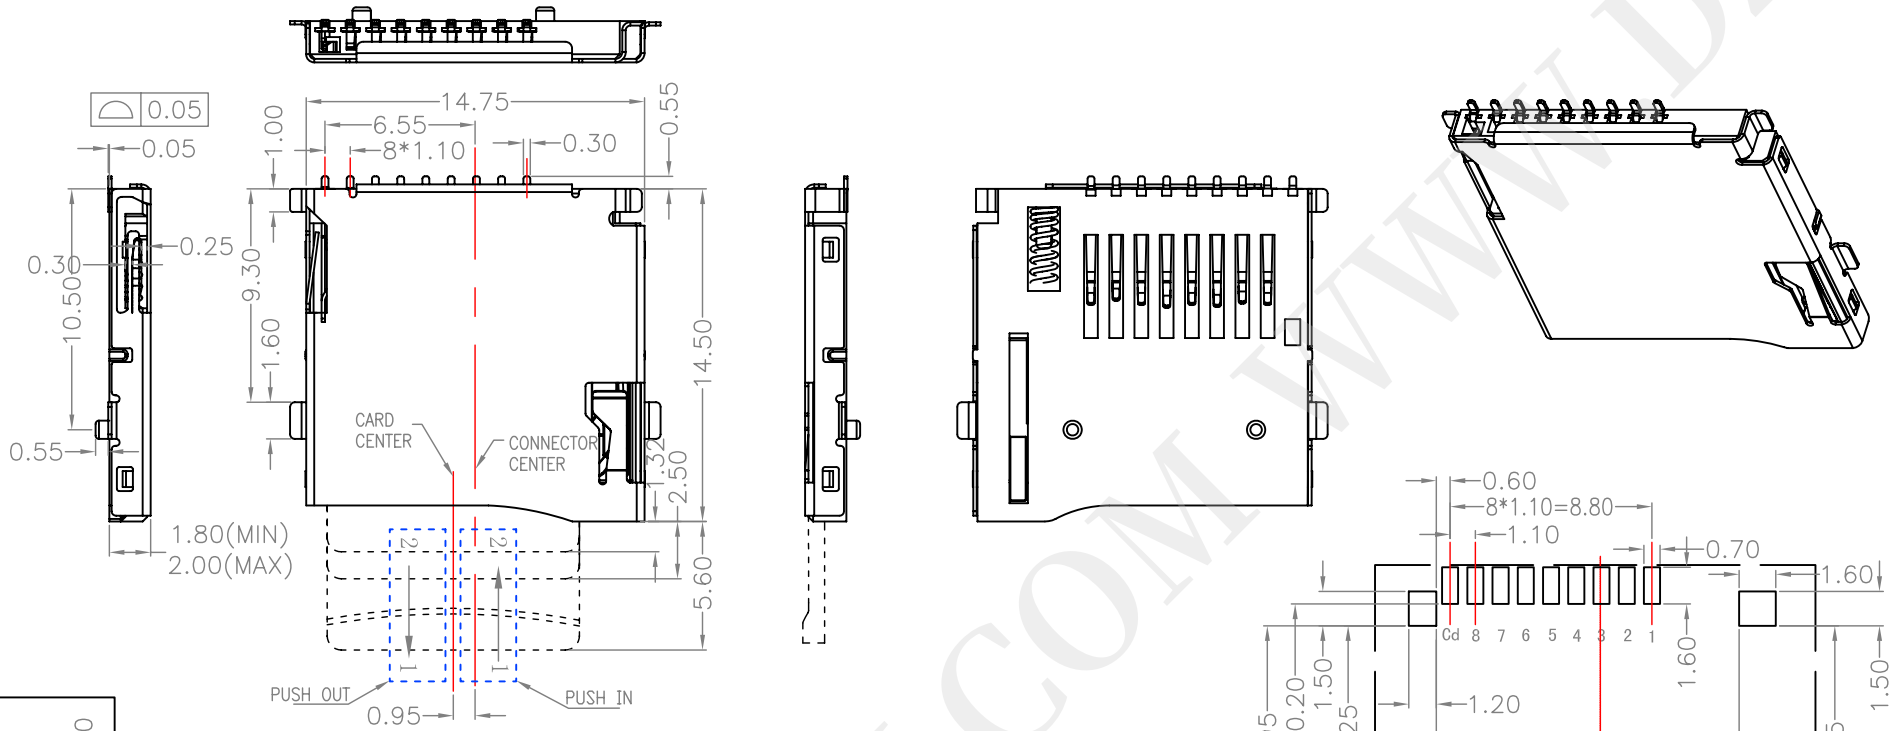

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

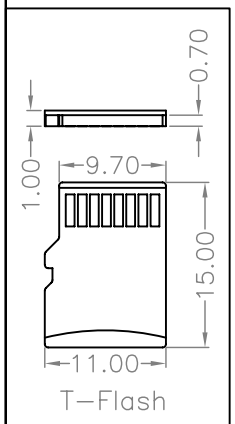

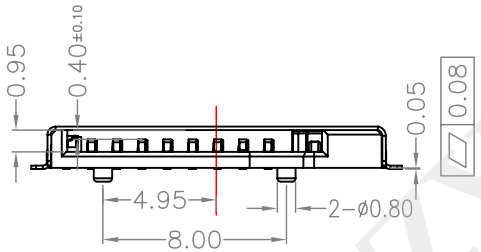

PIN NO.	NAME	YTPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DATO	I/O/PP	DATE LINE(BITO)
8	DAT1	I/O/PP	DATE LINE(DIT1)


NOTES:
1. MATERIAL:
   HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V_0, COLOR:BLACK.
   CONTACT: COPPER ALLOYS.
   COVER: COPPER ALLOYS OR STEEL.
2. PLATING:
   UNDERPLATE: NICKEL.
   CONTACT AREA: GOLD OVER NICKEL.
   SOLDER AREA: TIN OVER NICKEL.
3. MULTIMEDIA CARD COMPATIBLE


深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY: 吴迪	DATE: 2009-10-11	PART NAME: TF PUSH 外焊
UNIT: mm [inch]	CHECKED BY: 马跃	DATE: 2009-10-11	PART NO. HYC04-TF09-200
SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE: 2009-10-11	MOLD NO. / DRAW NO. HYC-TF09101102
			SHEET NO. 1 OF 3

WWW.DZYJZJ.COM


www.twhoau.com Tel:0755-27575531 Fax:0755-27576267-805

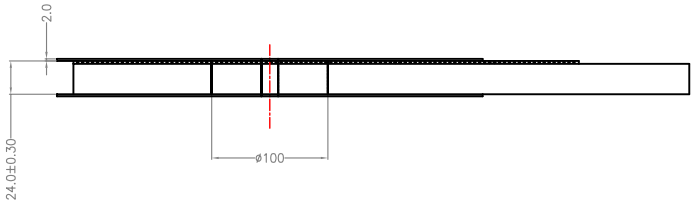

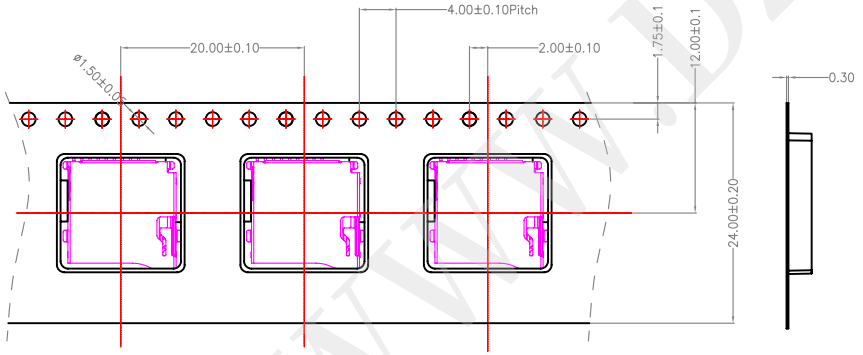

PULL OUT DIRECTION

PULL OUT DIRECTION

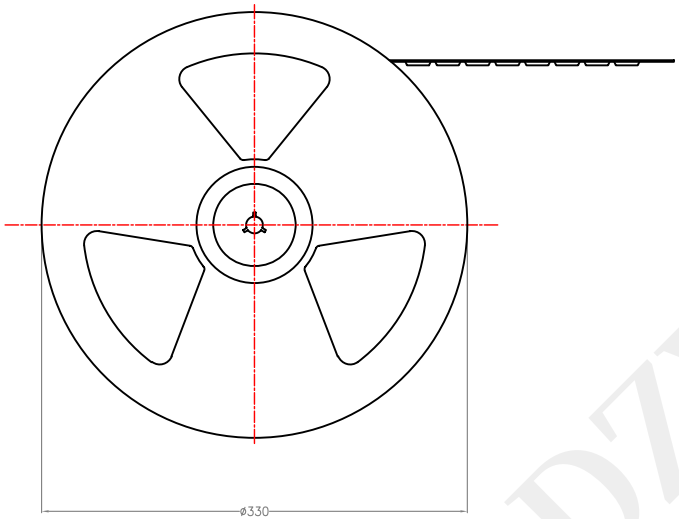

Note:

1. 10 sprocket hole pitch cumulateve tolerance±0.2
2. Carrier camber is within 1 mm in 250mm.
3. Material:Black Conductive Polystyrene Alloy
100 % recyclable.
4. All dimensions meet EIA-481-B requirements.
5. Thickness:0.3±0.05mm.
6. Component load per 13″reel:1000 pcs.
7. A box of 10 volumes, 5000PCS
8. product weight: 6.5g; weight of a roll:980g ; weight of a box:5100g.
9. empty box:200g / 45*345*155


深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.° ±2° X.X° ±0.5°	DRAWED BY : 吴迪	DATE : 2009-10-11	PART NAME: TF PUSH 外焊
	CHECKED BY: 马跃	DATE : 2009-10-11	PART NO. HYC04-TF09-200
UNIT: mm [inch]			MOLD NO.
	APPROVED BY: 邱国夷	DATE : 2009-10-11	DRAW NO: HYC-TF09101102
SCALE:1:1 SIZE: A4			SHEET NO. 2 OF 3

WWW.DZYJZJ.COM

www.twhoau.com Tel:0755-27575531 Fax:0755-27576267-805

THE PACKING FOR SD CARD SERIES PUSH TYPE

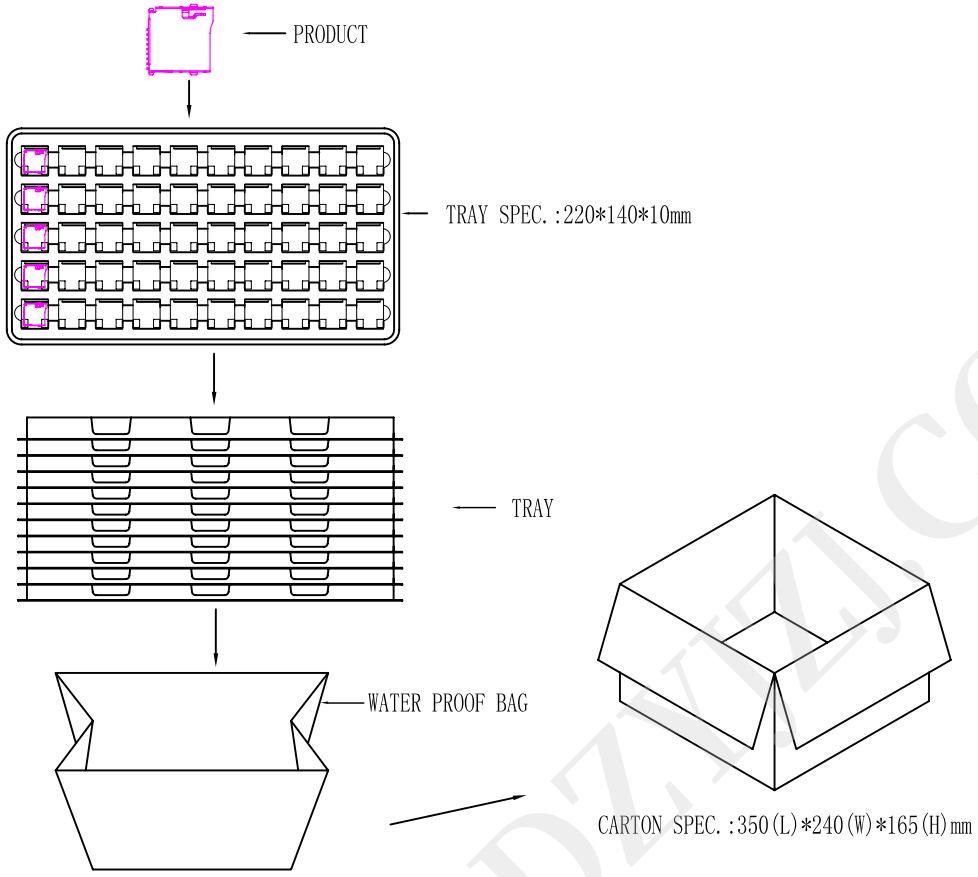

PACKING STEP

Note:

PUT PRODUCT INTO THE TRAY,AND AS SAME DIRECTION

THE DIRECTION REFERE TO DRAWING

QUANTITY OF PER TRAY:50 PCS

QUANTITY OF PER CARTON:21 TRAYS

THE TOP TRAY NOT PUT INTO PRODUCT
AS A COVER TO PROTECT PRODUCT

QUATITY OF PER CARTON:5000 PCS

THE UNFILLING-CARTON MUST BE FILLED WITH ASSUAGEMENT

THE CARTON FULLY FILLED WITH PRODUCTS
THE MAX. ACCUMULATING QUATITY IS 5 CARTONS

THE WEIGHT OF PER PRODUCT:1g; PER CARTON:3.15Kg

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 吴迪	DATE : 2009-10-11	PART NAME: TF PUSH 外焊
	CHECKED BY: 马跃	DATE : 2009-10-11	PART NO. HYC04-TF09-200
UNIT: mm [inch]			MOLD NO.
	APPROVED BY: 邱国夷	DATE : 2009-10-11	DRAW NO: HYC-TF09101102
SCALE:1:1 SIZE: A4			SHEET NO. 3 OF 3

WWW.DZWJ.COM