www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267

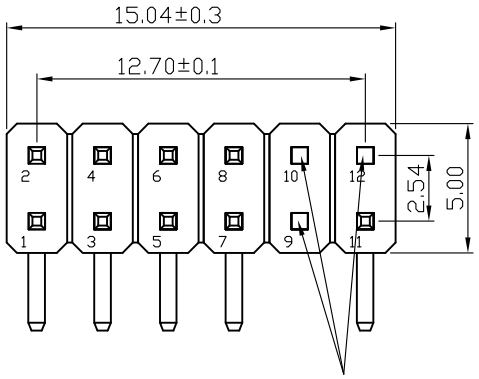

空第9,10,12P

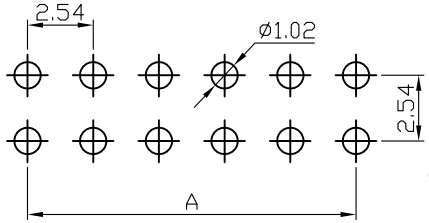

RECOMMEND P.C.B LAYOUT

PCB TOLERANCE:±0.05 (TOP VIEW)

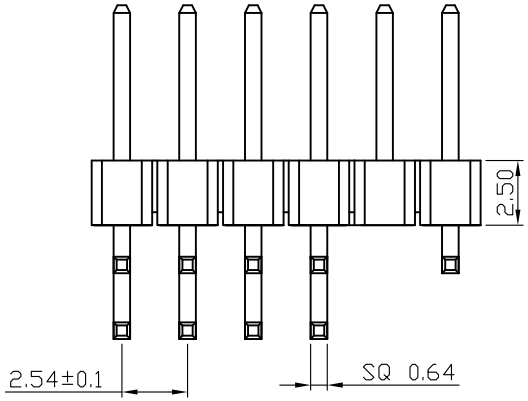

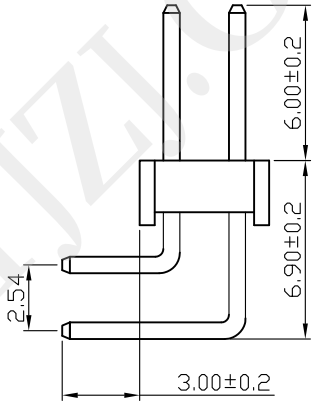

SPECIFICATIONS

Current Rating:	3Amps
Insulation Resistance:	1000MΩ Min
Contact Resistance:	20MΩ Max
Withstanding Voltage:	AC 1000V
Operation Temperature:	-40° to+105°
Contact Material:	Brass
Standard:	PA6T
Insrlator Material:	Polyester(UL 94V-0)
Contact Plating:	Gold Flash
Max.Processing Temp:	240° C for30-60seconds (260° C for5seconds)

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY: 陈一鸣	DATE: 2014-02-23	PART NAME: 2.54PH H2.5 2x6Pin 90°PC3.0 PA6.0 PB6.9 L13.8-18.8 空第9,10,12P
	CHECKED BY: 马跃	DATE: 2014-02-23	PART NO. HYC1-25MK254-2X6-1380/1880
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE: 2014-02-23	MOLD NO.
SCALE:1:1 SIZE: A4			DRAW NO: HYC-2307111852
			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM