

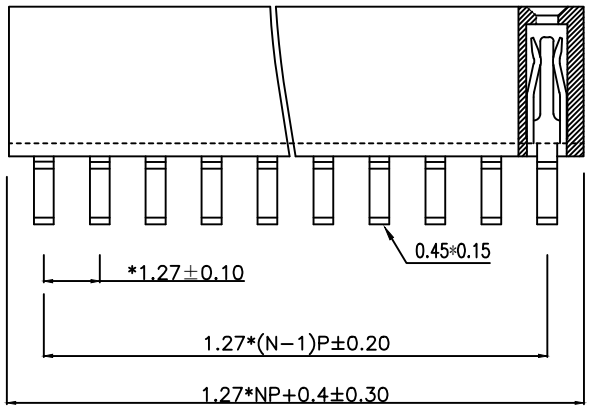

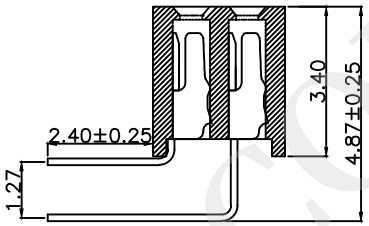

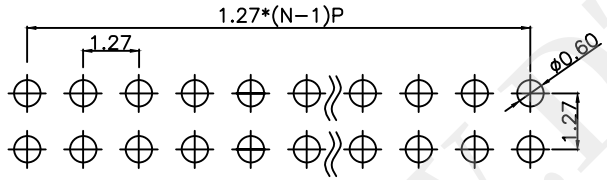

RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCES:±0.05

Notes:

Rated current:1.0A
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operating Temperature:-40
Contact Material:Brass
Plating:G/F
Insulator Material: PA6T UL94V-0 BK

深圳市华宇创精密电子有限公司				
TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 1.27PH 3.4H 2XNpin PC2.4 弯插排母	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC1-34F127-2XX-024
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
SCALE:1:1 SIZE: A4			DRAW NO:	HYC-2606161054
			SHEET NO.	1 OF 1

WWW.DZYJZJ.COM