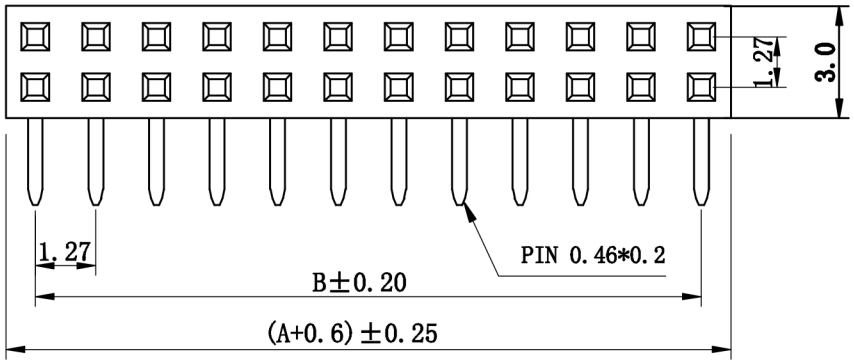

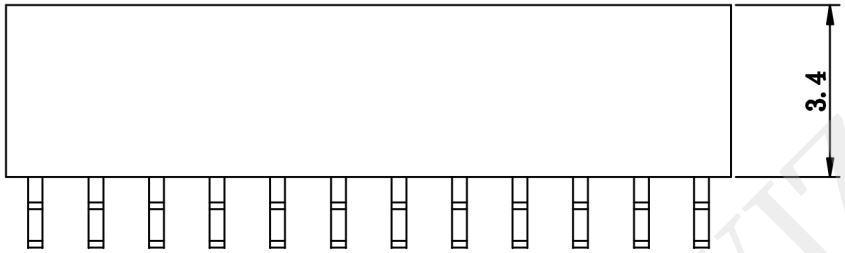



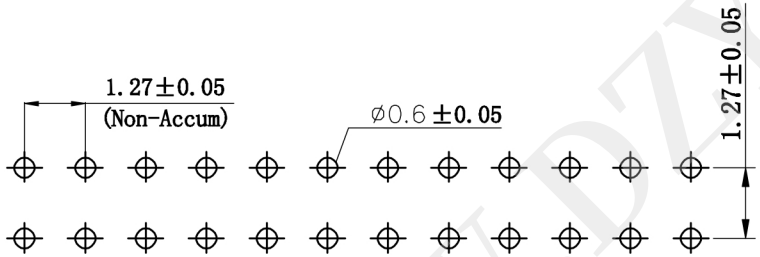

SPECIFICATIONS

Current Rating:	**2Amps**
Insulator Resistance:	**5000Megohms min.**
Dielectric Withstanding:	**AC 500V**
Operating Temperature:	**-40°∿ +105° C**
Contact Material:	**Phosphor bronze**
Insulator Material:	**PA6T**
Plating:	**Gold Flash**

UNSPECIFIED TOLERANCE: ±0.20

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY: 陈一鸣	DATE: 2014-02-23	PART NAME: 1.27PH 3.4H 2XNpin PC3.0 弯插排母
	CHECKED BY: 马跃	DATE: 2014-02-23	PART NO. HYC1-34F127-2XN-052
UNIT: mm [inch]			MOLD NO.
	APPROVED BY: 邱敏	DATE: 2014-02-23	DRAW NO. HYC-2609091642
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM