





RECOMMEENDER PCB LAYOUT
TOLERANCE UNLESS OTHERWISE IS ± 0.05

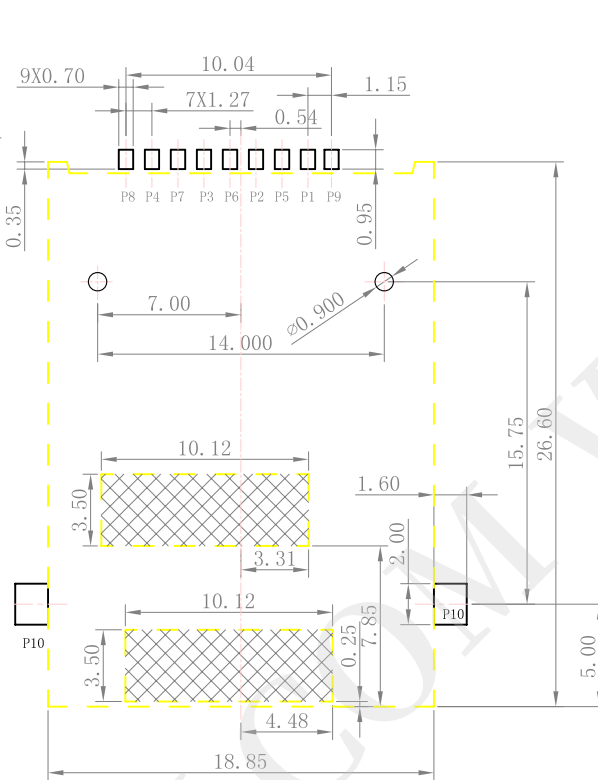


Can accord with management standards for
"environment-related substances to be controlled"


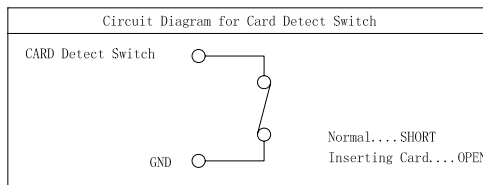


深圳市华宇创精密电子有限公司


TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5*	DRAWN BY :		DATE :		PART NAME:	
	吴迪		2012-02-23		SIM PUSH 8+1	
	CHECKED BY:		DATE :		PART NO.	HYC10-SIM09-205
 UNIT: mm [inch]	马跃		2012-02-23		MOLD NO.	
	APPROVED BY:		DATE :		DRAW NO:	HYC-SIM13082305
	邱国夷		2012-02-23		SHEET NO.	1 OF 2

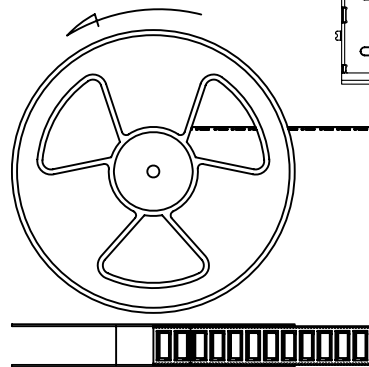





一，收料方向如图，逆时针收料。
卷带前后各留10个空位。

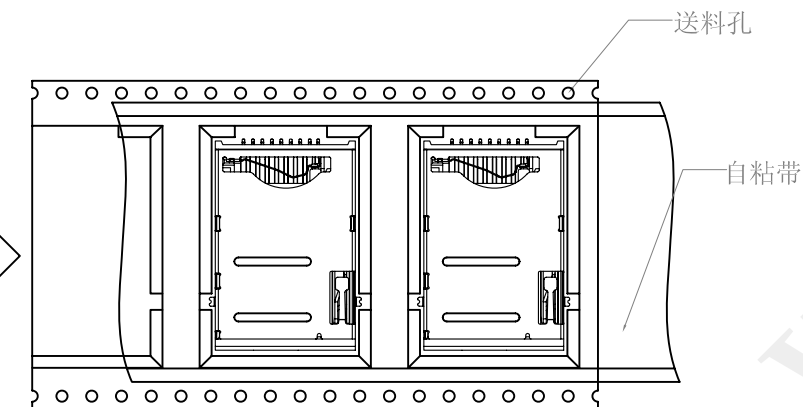


二，产品放置如图。自粘带封装时不可盖住送料孔。




三，每盘包完500PCS后，用美纹胶粘在自粘带上。再用黑胶带把卷包好的产品包起来，用美纹胶粘好。

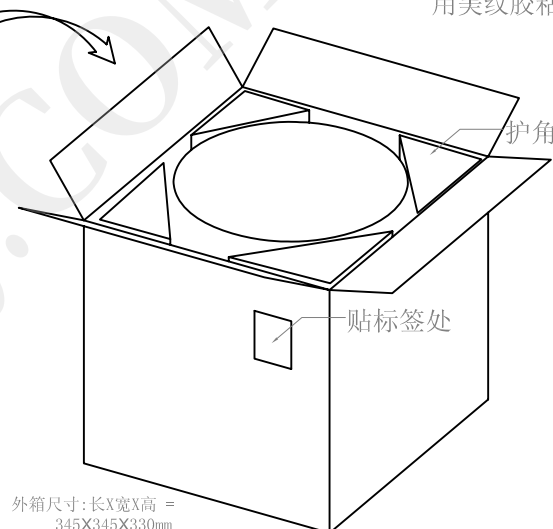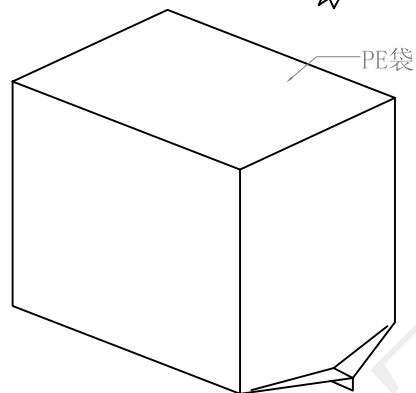

外箱尺寸:长X宽X高 =
345X345X330mm

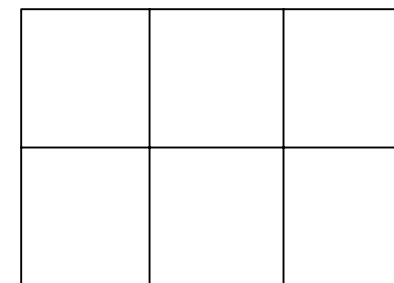

六，栈板长宽均为1100mm，每层可放9箱成品，可放6层共54箱成品。（限高2米）



四，拿6卷卷装好的产品，放入PE袋内。每袋放2PCS干燥剂。

五，将封好的PE袋装入纸箱内，每个转角处放一个护角，用Tape将纸箱封实。标签贴在纸箱侧麦右上方。



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"	DRAWN BY : 吴迪	DATE : 2012-02-23	PART NAME: SIM PUSH 8+1
UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY: 马跃	DATE : 2012-02-23	PART NO. HYC10-SIM09-205
	APPROVED BY: 邱国夷	DATE : 2012-02-23	DRAW NO: HYC-SIM13082305
			SHEET NO. 2 OF 2