




NOTES:

- MATERIAL AND PLATING:**
 Housing: LCP+30%G. F, UL94V-0, Black
 CAP: LCP+30%G. F, UL94V-0, Black
 Contact: Copper Alloy, Au And Sn Plated.
 Shell: C2680-H, Ni Plated.
- MECHANICAL CHARACTERISTIC**
 Mating Force: 44.1N(4.5Kgf) max.
 Unmating Force: 9.8N~39.2(1~4Kgf).
 Durability: 10,000 Cycles.
- ELECTRICAL CHARACTERISTIC**
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 100M Ohm Min(unmated)
 10M Ohm Min(mated)
 Dielectric Withstanding Voltage: 500V AC Min
- TEMPERATURE**
 Operating Temperature: -40° C~+85° C
 Storage Temperature: -60° C~+105° C

CONN. Edge
 RECOMMENDED PCB LAYOUT (TOP VIEW)
 GENERAL TOLERANCES:±0.05 (t=1.6)


深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: HDMI A TYPE SMT带侧螺丝孔
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC144-HDMI A19-122
UNIT: mm [inch] SCALE:1:1	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2211041336
SIZE: A4			SHEET NO. 1 OF 1

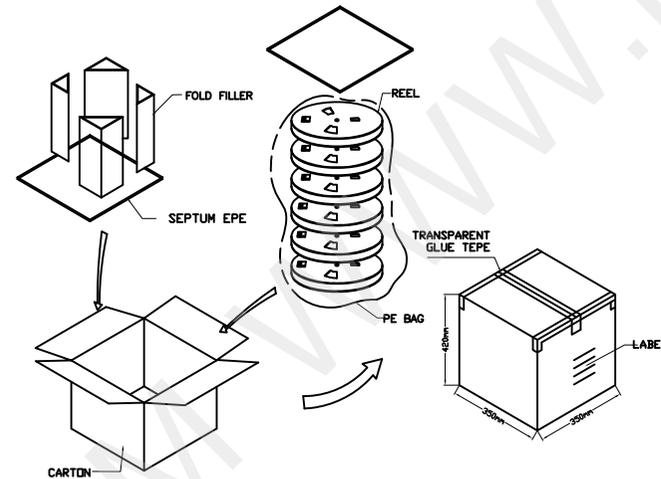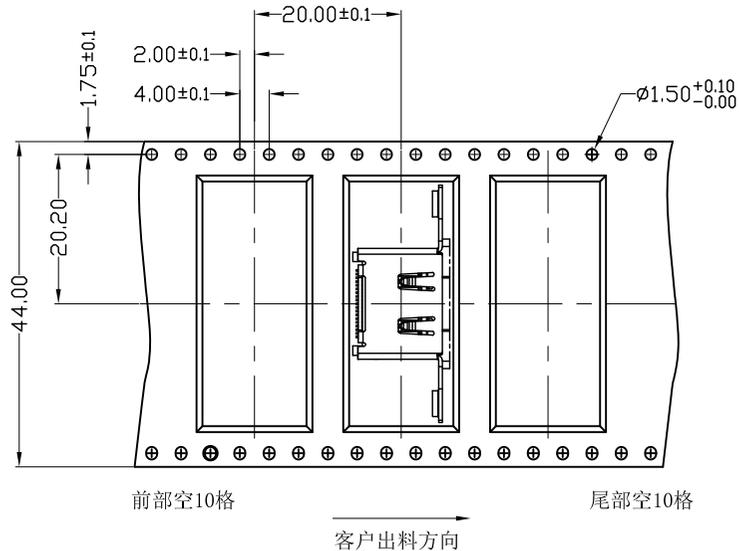


1. QUANTITY:300 PCS

2. COVER TAPE PEELING FORCE:



A	15°~0°
F	0.1N~1.3N

3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

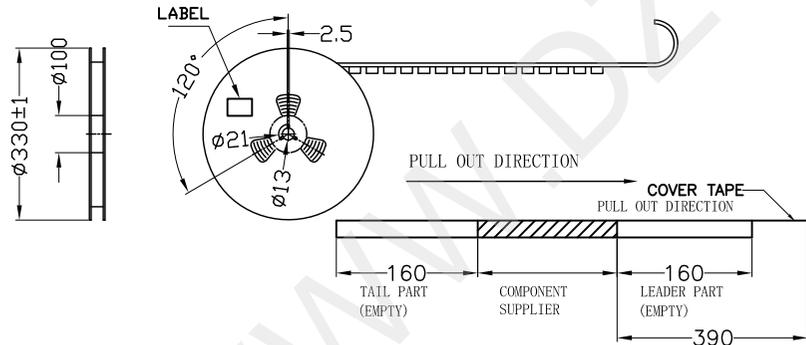

PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED IN THE CHART.

PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S. P. Q.)	TOTAL REELS PER PRIMARY CARTON
	2400 (PCS)	300 (PCS)	8



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. 	
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: 	