


www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267

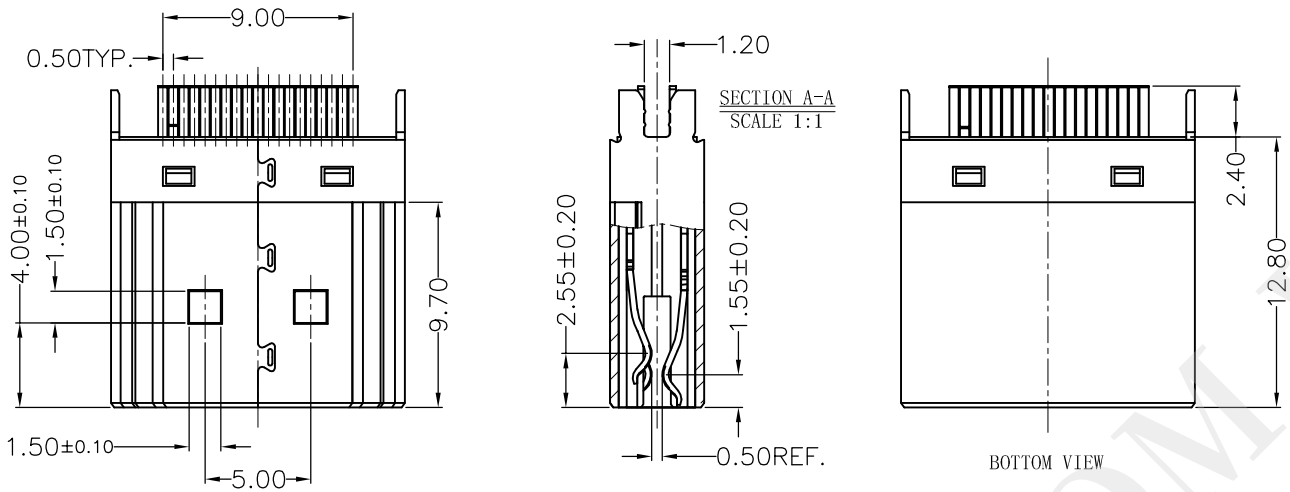

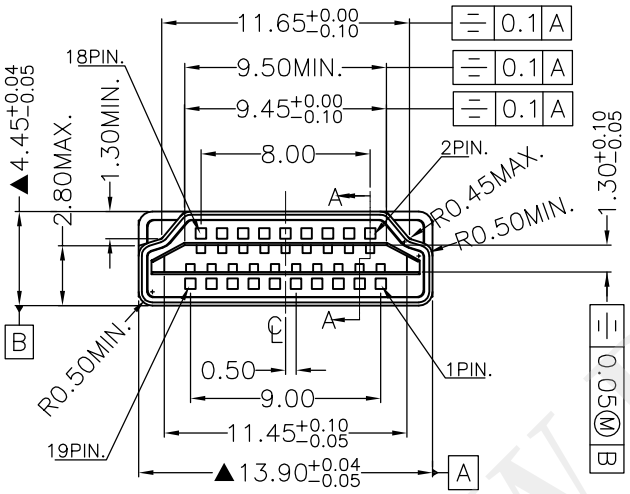

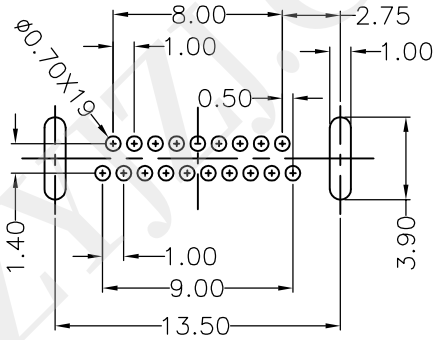

RECOMMENDED PCB LAYOUT
TOP VIEW
GENERAL TOLERANCE:T=1.20mm±0.05

Specifications:
1. Insertion force:44.1N MAX.
2. Withdrawal force:9.8~39.2N.
3. Durability:10000 Cycles.
4. Current rating:0.5A
5. Voltage rating:40V AC MAX.
6. Dielectric strength:
   500V AC MIN.(UNMATED)
   300V AC MIN.(MATED)
7. Contact resistance:30mΩ MAX.
8. Insulation resistance:
   100MΩ DC MIN(UNMATED)
   10MΩ DC MIN(MATED)
9. Temperature: -40℃ TO +85℃
10. All the material must accord with the RoHS.
11. The important dimensions with "▲"

NO.	PART NAME.	MATERIAL	Q'TY	NOTE
03	Terminal	C5191	19	Gold plated within connect area ,Tin plated within solder area
02	Housing	LCP	1	LCP+30%GF UL94-V0, Color is black
01	Shell	SPCC/C2680	1	Plating nickle or gold overall

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X' ±0.5'	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: HDMI A TYPE 公座夹板1.2
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC156-HDMIA19-120
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO. / DRAW NO. HYC-2308021516
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1