




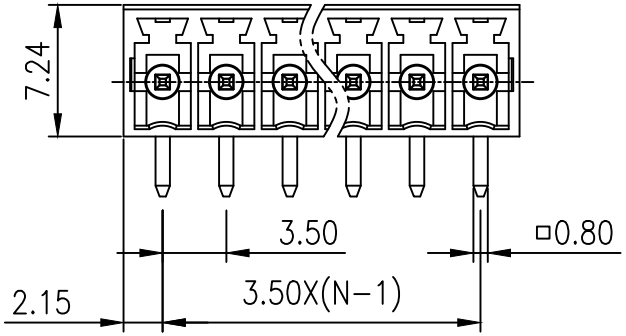

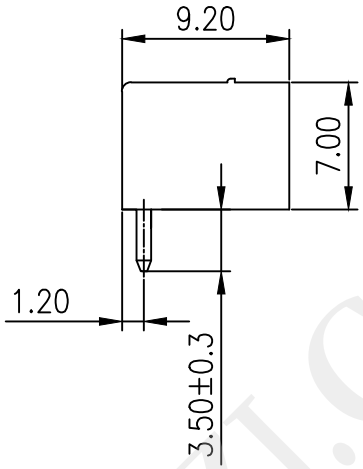

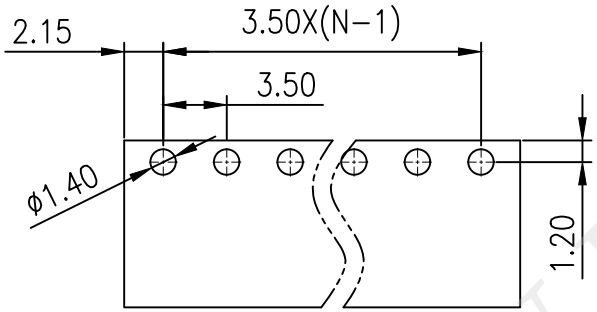

PCB LAYOUT

UL/CUL 技术参数 UL/CUL Technical Date				
等级	Use Group	B	C	D
额定电压/电流Rated Voltage/Current [V]/[A]		300V/8A	–	300V/10A
接线范围	Wire Range [AWG]	–		
耐电压	Withstanding Voltage	1600V/1MIN		
IEC 技术参数 IEC Technical Date				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压/电流Rated Voltage/Current [V]/[A]		–	160V/7A	320V/7A
额定冲击电压Impulse withstand voltage[KV]		–	4.0	4.0
导线截面积[硬/柔]Conductor crosssection[mm²]		–		
材质及电镀 Material and plating				
塑件	Housing	PA66 UL94V-0		
焊针	Pin header	铜合金镀锡 Copper alloy Sn plated		
–		–		
–		–		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2-24		
剥线长度	Stripping Length [mm]	–		
螺丝/扭矩	Screw/Torque(Max) [N.m]	–		
工作温度	Operating temperature [°C]	-40~+105		
引针尺寸	Pin dimensions [mm]	3.5		
PCB板孔径	PCB Hole Diameter [mm]	1.4		

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.° ±2° X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 插拔式接线端子 3.5PH 弯针
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC177-JXDXX-350
			MOLD NO.
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2412131627
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM