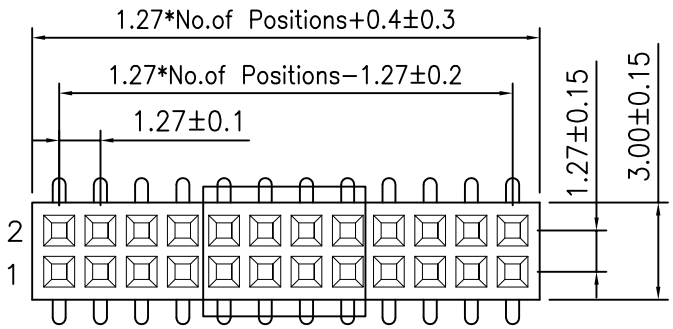

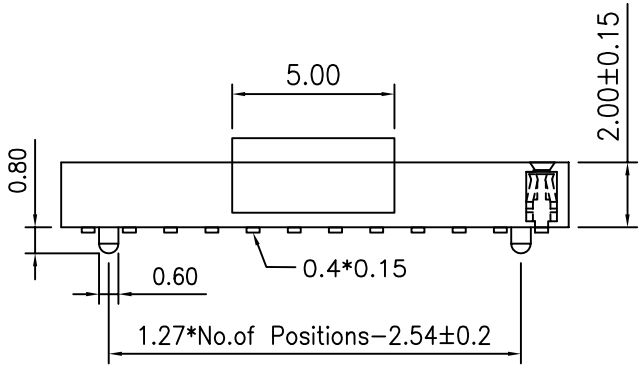





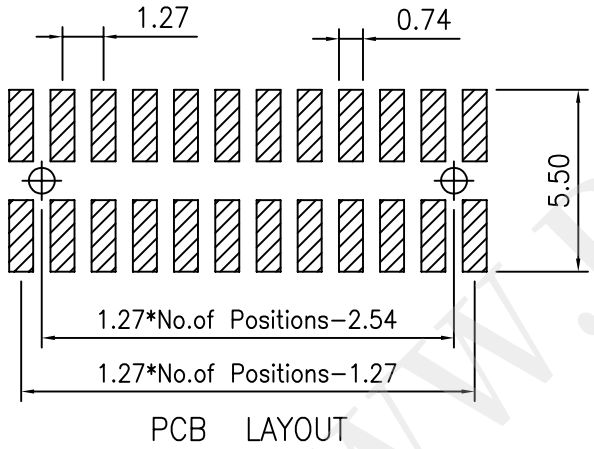

SPECIFICATIONS

Currrnt Rating:1 AMP
Insulator Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Withstanding Voltage:AC 500V
Operating Temperature:-40℃ to +105℃
Max Processing Temp:230° -260° for 30-60 seconds
Insulator:Glass filled PA6T (UL94V-0),Black
Contacts:Brass

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 1.27PH 2.0H 2XNpin 脚宽4.6排母	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC2-20F127-2XX-(D)
			MOLD NO.	
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2606101451
SCALE:1:1 SIZE: A4			SHEET NO.	1 OF 1

WWW.DZYJZJ.COM