
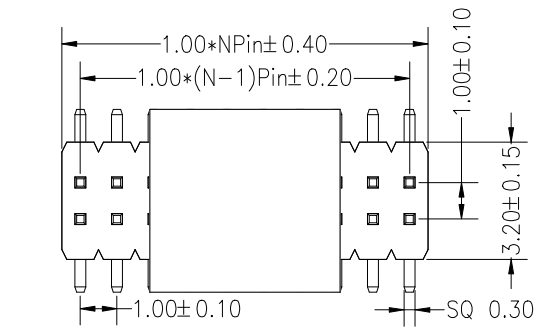
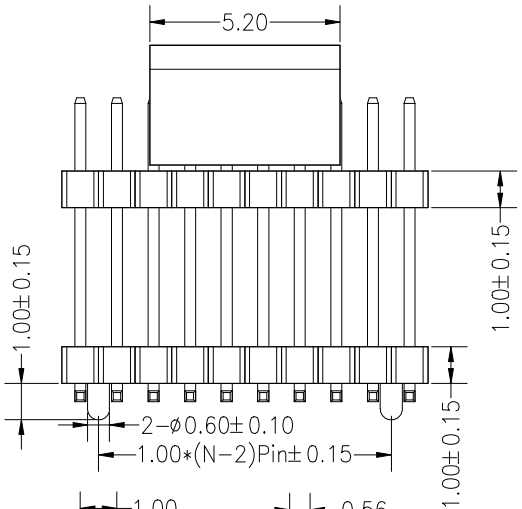
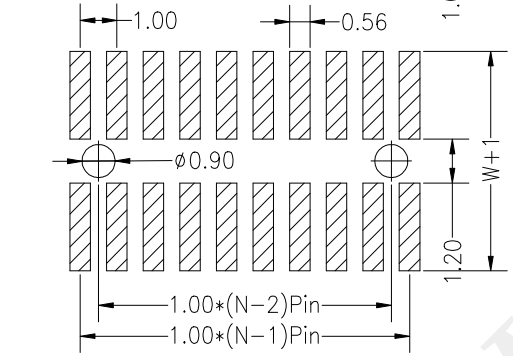



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE± 0.05)

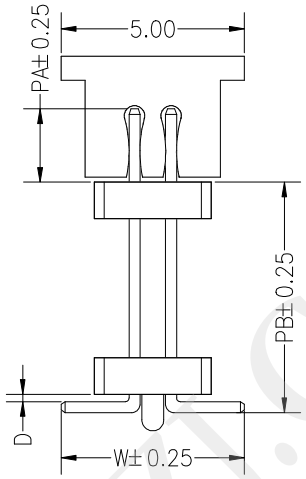


| Dimension antitheses list | | | | |
|---|---|---|---|---|
| ITEM | PA | PB | W | D |
| Standard | 2.00 | 6.30 | 5.00 | 0.20 |

SPECIFICATIONS
Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V−0)
Max.Processing Temp:
(PA6T/LCP/PA9T)260°C± 5°C For 5~10 Second

深圳市华宇创精密电子有限公司

| | | | | |
|---|---|---|---|---|
| TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5° | DRAWED BY : 陈一鸣 | DATE : 2014-02-23 | PART NAME: | 1.0PH 1.0H 2XNpin SMT 带内柱 |
| | CHECKED BY: 马跃 | DATE : 2014-02-23 | PART NO. | HYC2-20M100-2XX-D-830 |
| | | | MOLD NO. | |
| UNIT: mm [inch] | APPROVED BY: 邱敏 | DATE : 2014-02-23 | DRAW NO: | HYC-2403231210 |
| SCALE:1:1 SIZE: A4 | | | SHEET NO. | 1 OF 1 |

WWW.DZYJZJ.COM