


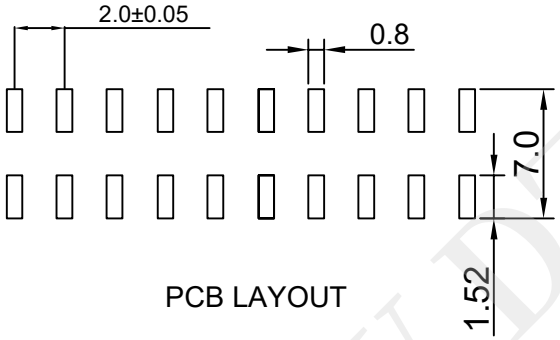

PCB LAYOUT

Notes：
Rated current:2.0A
Withstand Voltage:500V AC/DC
Contact Resistance:20MΩ Max
Insulation Resistance:1000MΩ Min
Operating Temperature:-40℃ TO +105℃
Contact Material:Brass
Insulator Material: PA6T UL94V-0 BK

深圳市华宇创精密电子有限公司				
TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.° ±2° X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	2.0PH 2.2H 2XNpin SMT排母
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC2-22F200-2XX
			MOLD NO.	
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2502281020
SCALE:1:1 SIZE: A4			SHEET NO.	1 OF 1

WWW.DZYJZJ.COM