




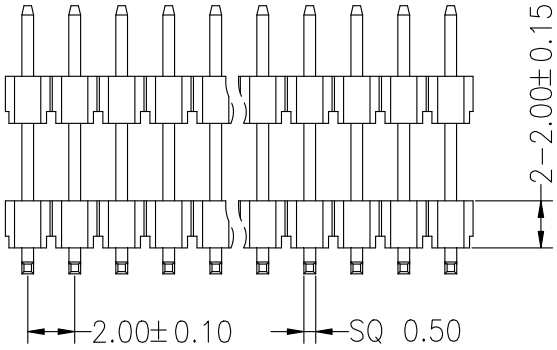

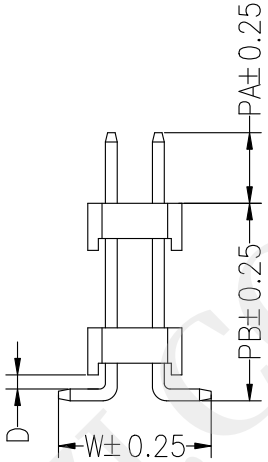

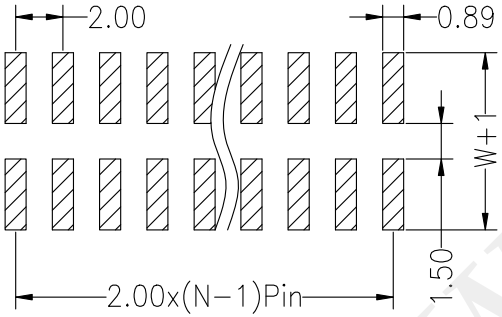

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Dimension antitheses list				
ITEM	PA	D	PB	W
Standard	3.50	0.60	8.40	6.50

SPECIFICATIONS
Rated Current:2.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Resistance To Soldering Heat:
260℃±5℃, 10s(PA6T&LCP insulator)

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X' ±0.5'	DRAWED BY: 陈一鸣	DATE: 2014-02-23	PART NAME: 2.0PH 2XNpin SMT双塑排针
	CHECKED BY: 马跃	DATE: 2014-02-23	PART NO. HYC2-40M200-2XX-1190
UNIT: mm [inch]			MOLD NO.
	APPROVED BY: 邱敏	DATE: 2014-02-23	DRAW NO. HYC-2307191001
SCALE:1:1	SIZE: A4		SHEET NO. 1 OF 1

WWW.DZYJZJ.COM