


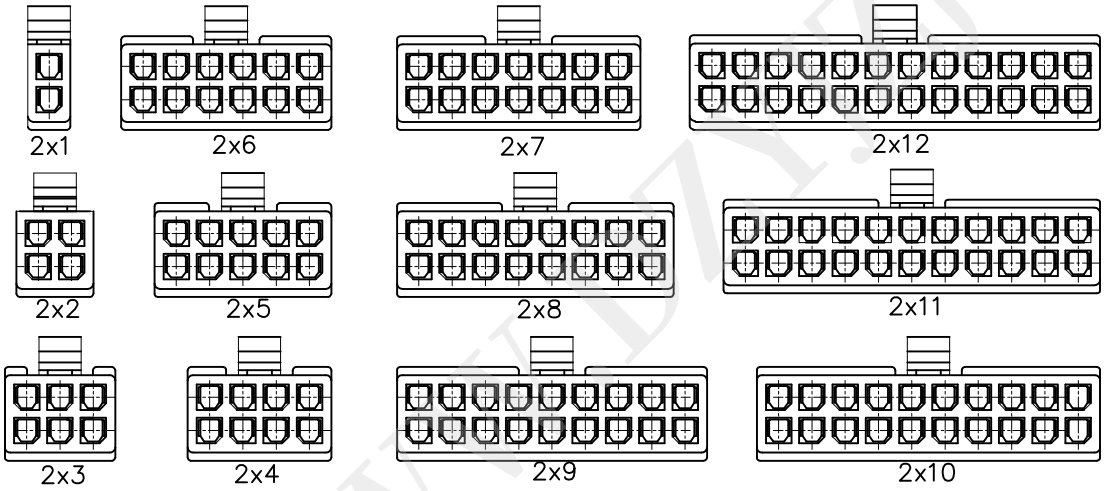

Poles	Part NO.	Dimensions mm	
		A	B
2	MX3.0-2X1P	--	3.85
4	MX3.0-2X2P	3.00	6.95
6	MX3.0-2X3P	6.00	9.95
8	MX3.0-2X4P	9.00	12.95
10	MX3.0-2X5P	12.00	15.95
12	MX3.0-2X6P	15.00	18.95
14	MX3.0-2X7P	18.00	22.00
16	MX3.0-2X8P	21.00	25.10
18	MX3.0-2X9P	24.00	28.10
20	MX3.0-2X10P	27.00	31.20
22	MX3.0-2X11P	30.00	34.20
24	MX3.0-2X12P	33.00	37.20

■ 规格 Specifications

◆1、极数 Poles: 1X2P/1X6P to 2X1P/2X12P
◆2、额定电流 Current rating: 5.0A AC,DC
◆3、额定电压 Voltage rating: 250V AC,DC
◆4、温度范围 Temperature range: -25°C to +85°C
◆5、接触电阻 Contact resistance: ≤15mΩ
◆6、绝缘电阻 Insulation resistance: ≥1000mΩ
◆7、耐电压 Withstand voltage: 1500V AC/minute
◆8、适用线规 Applicable wire: AWG #30 to #20
◆9、适用基板厚度(Applicable PC board thickness): 1.6mm to 2.0mm

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.' ±2', X.X" ±0.5"	DRAWED BY: 陈一鸣	DATE: 2014-02-23	PART NAME: 3.0PH 孔座
	CHECKED BY: 马跃	DATE: 2014-02-23	PART NO. HYC225-2XNY-300
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE: 2014-02-23	MOLD NO.
SCALE:1:1 SIZE: A4			DRAW NO: HYC-2506061751
			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM