


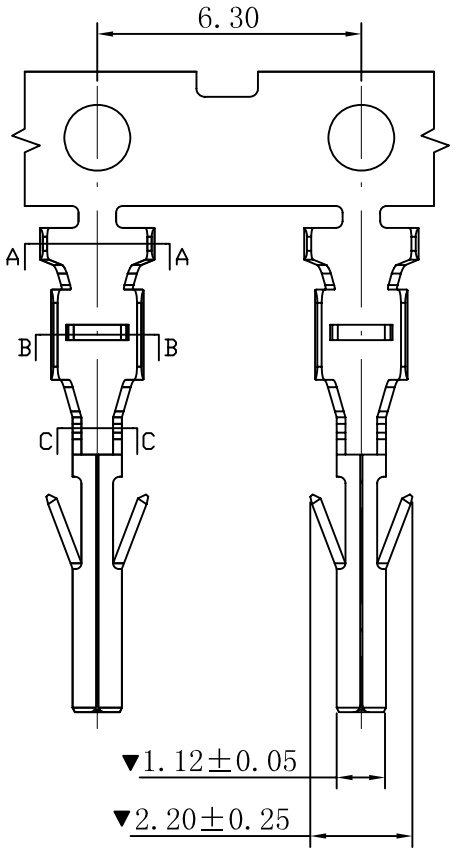


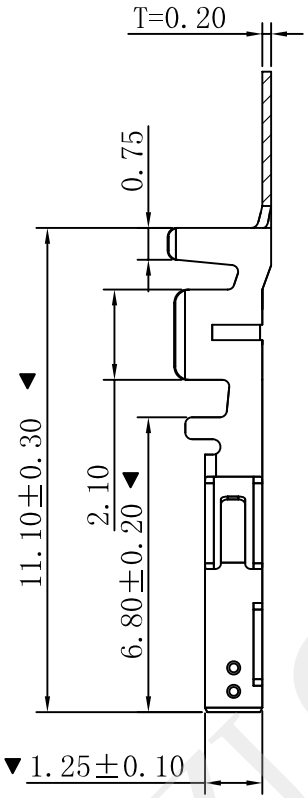

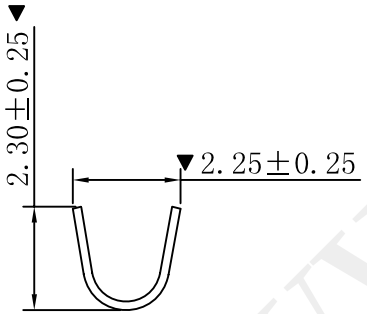

SEC A-A



SEC B-B

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ TERMINAL

- Applicable wire: AWG#24-#28
- Material: Phosphor Bronze
- Finish: Tin Plated
- The Dimension Marked "▼" Must Be Recorded

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 3.0PH 端子	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC225-T-300
UNIT: mm [inch]			MOLD NO.	
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2506061742
SCALE:1:1	SIZE: A4		SHEET NO.	1 OF 1

WWW.DZYJZJ.COM