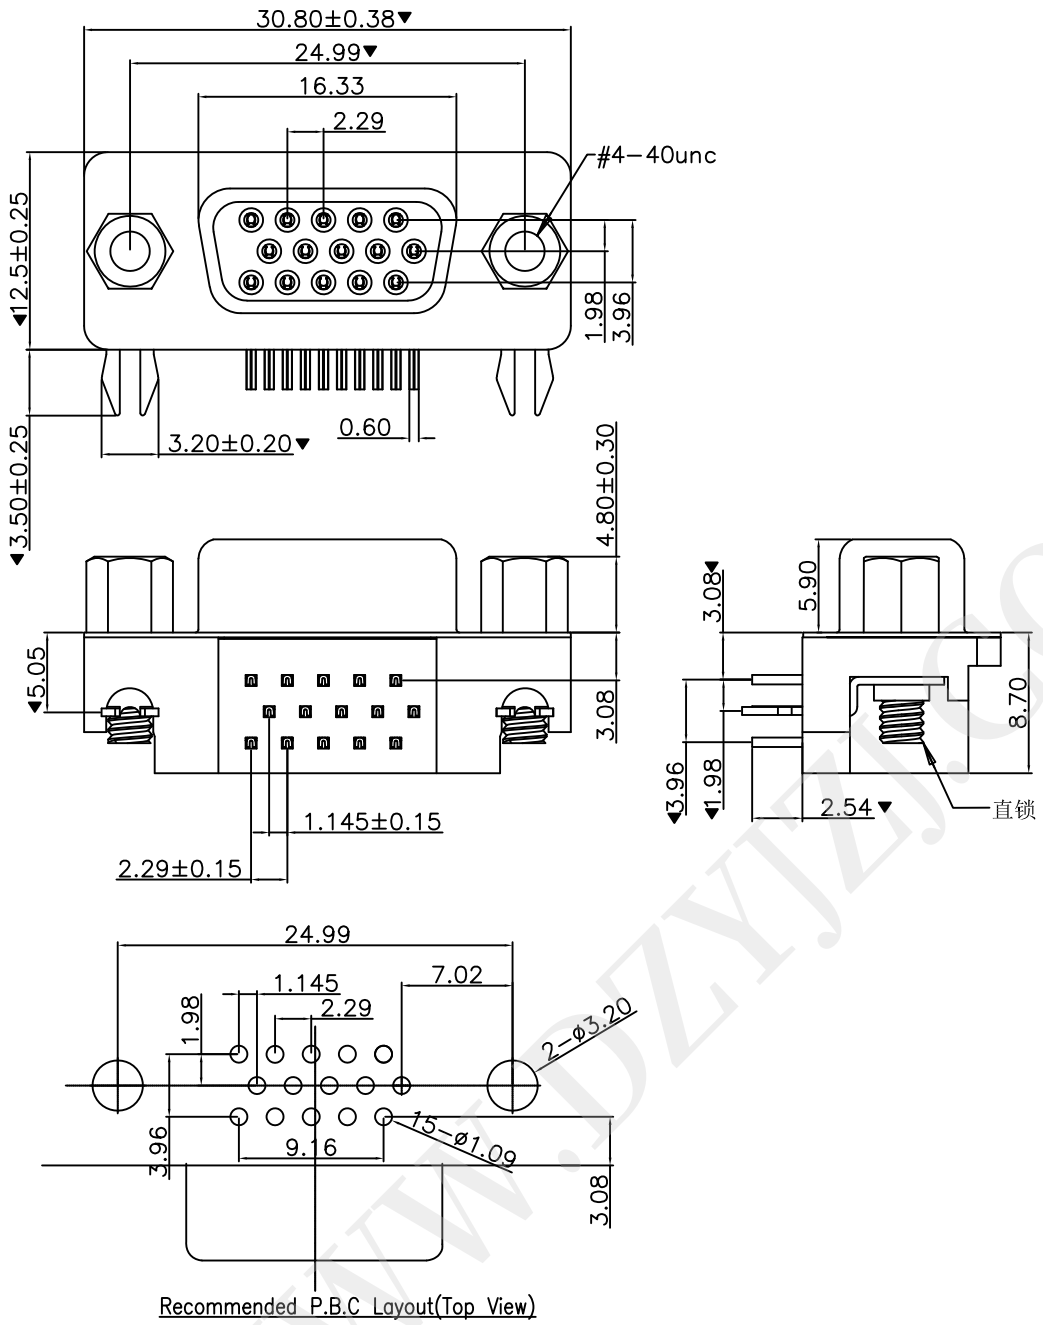


NOTE:
1.MATERIAL:
- 1.1 HOUSING:PBT+30%GF, . COLOR:BLUE.
- 1.2 TERMINAL:COPPER ALLOY.
- 1.3 SHELL:SPCC
- 1.4 SCREW:SPCC
- 1.5 GROUNDING:SPCC

2. PLATING:
- 2.1 CONTACT:
  - 80u" Min. TIN PLATED ON SOLDER TAIL
  - 30u" Min. NICKEL UNDER-PLATED
- 2.2 SHELL: 50u" Min, NICKEL PLATED OVERALL
- 2.3 GROUNDING: 50u" Min, TIN PLATED OVERALL.
- 2.4 SCREW: 50u" Min, NICKEL PLATED OVERALL.

3. SPECIFICATIONS:
- VOLTAGE: 500 VAC(RMS) MAX.
- CURRENT RATING: 3 AMPERE PER CONTACT
- CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN.
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(RMS)
- MATING FORCE: 5.1Kg.Max.
- UNMATING FORCE: 1.0Kg MIN.
- OPERATING TEMPEROTURE:-25°C ~ +85°C

注：“▼”为重点管控尺寸

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: HDR3.08 母座直锁式 小鱼叉脚	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC257-VGA15B-308
UNIT: mm [inch]			MOLD NO.	
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2606021033
SCALE:1:1 SIZE: A4			SHEET NO.	1 OF 1

WWW.DZYJZJ.COM