


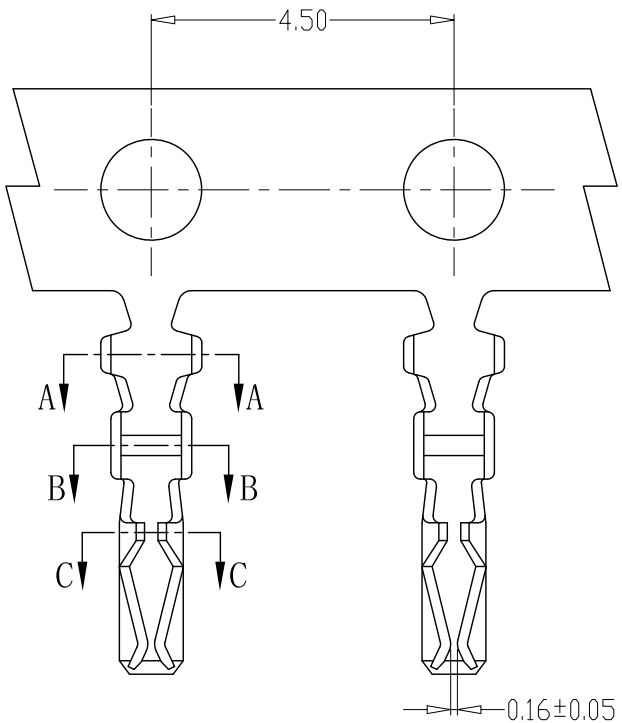


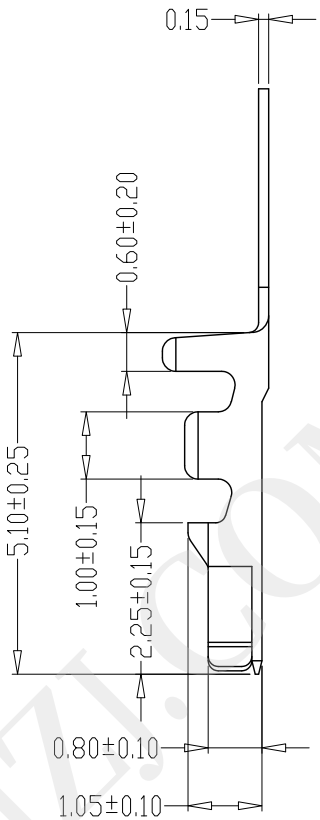




SEC. A-A



SEC. B-B



SEC. C-C

SPECIFICATIONS
1、Current Rating: 1A AC, DC
2、Voltage Rating: 150V AC, DC
3、Temperatuer Range: -25℃～+85℃
4、Contact Resistance: 20mΩ Max
5、Insulation Resistance: 500MΩ Min
6、Withstanding Voltang: 500V AC/minute
7、Material:Phosphoric bronze Tin-plated
8、Applicable Wire Sizes:AWG#26~32#

深圳市华宇创精密电子有限公司				
TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DF16 带扣端子	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC275-T-125
UNIT: mm [inch]			MOLD NO.	
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2503260859
SCALE:1:1	SIZE: A4		SHEET NO.	1 OF 1

WWW.DZYJZJ.COM