




www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267

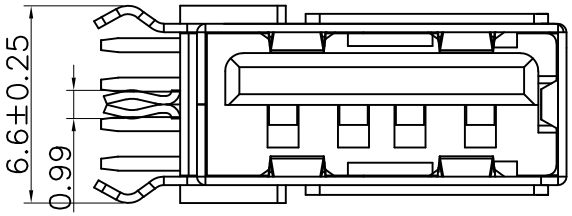

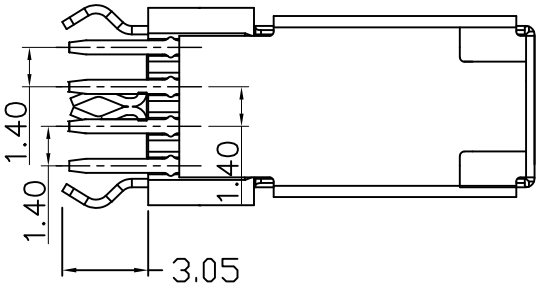

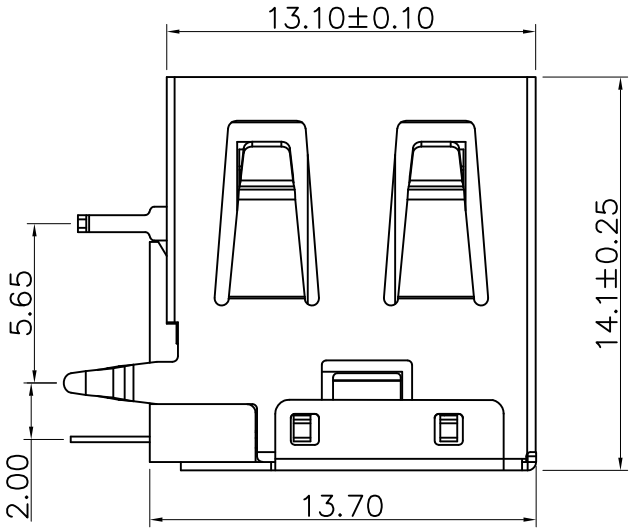

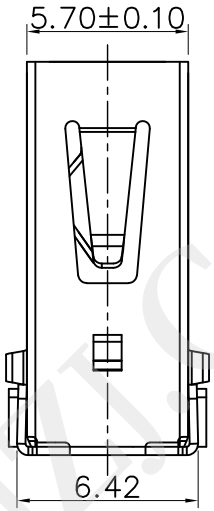

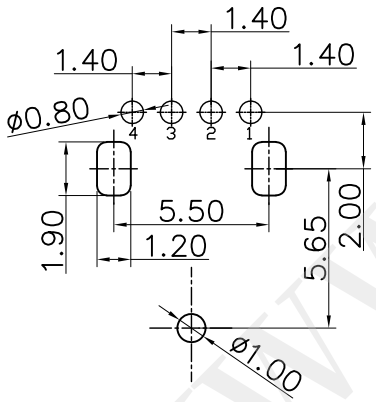

X(材质)	X(颜色)
不锈钢 (S)	黑/black(B)
铜壳 (C)	蓝/blue(BL)
铁壳 (I)	橙/orange(O)
	绿/green(G)
	白/white(W)

规格说明:Specifications:

电气特性:Electrical:

1.额定电流: Current Rating
1.5A/contact terminal

2.额定电压: Voltage Rating
30V DC

3.接触阻抗:Contact Resistance
30 milliohms MAX

4.耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levol

5.绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1.插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)

2.端子保持力: Terminal Retenion
1.0kgf(MIN)

原材料:Matorial:

1.塑胶:Housing:
Hing Temperature Tnermaplastics,

2.端子:Contact:Copper Alloy C2680

3.外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1.端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls
端子四周镀50U"(MIN)镉,镀金区域镀100-200U"镀金1U"

2.外壳:Shell:
铜壳四周镀80U"(MIN)镉
Nickel Plating

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB AF 短体侧插无卷边0型脚
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC360-USBA04-140-XX
			MOLD NO.
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2606021027
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM