

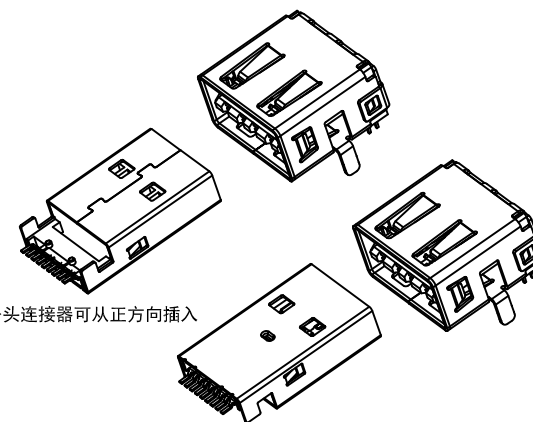
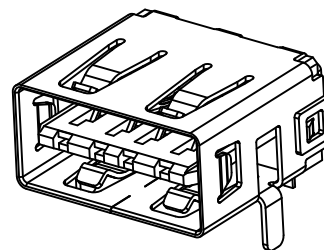
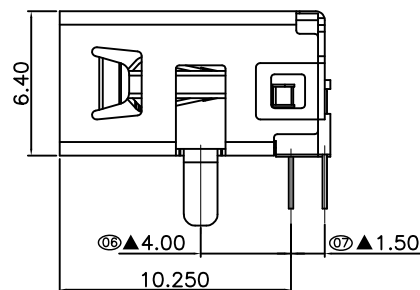
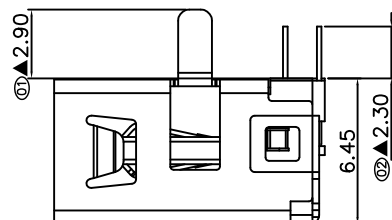
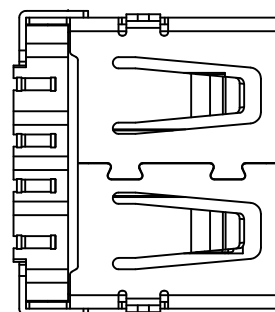


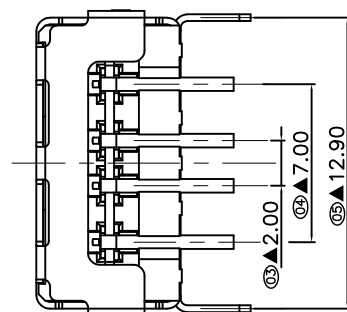

公头连接器可从正方向插入

公头连接器可从反方向插入

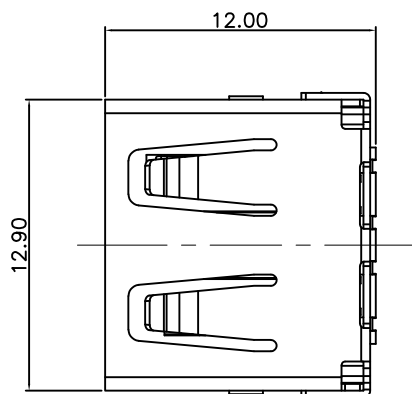


NOTES:


1. CURRENT RATING: 3.0A/PIN MAX.
2. DIELECTRIC WITHSTAND VOLTAGE: 500 V AC MIN.
3. CONTACT RESISTANCE: 30 MILLIONHM MAX.
4. INSULATION RESISTANCE:1000 MΩ MIN.
5. INSERTION FORCE :35N Max.
6. UNMATING FORCE:5N Min.
7. DURABILITY:1500 CYCLES.
8. TEMPERATURE RANGE: -40 °C ~ 85 °C.
9. ALL PRODUCTS COMPLY WITH RoHS ENVIRONMENTAL REQUIREMENTS.
- 10: MARK "▼" AS THE FOCUS, FIRST ITEM INSPECTION.
- 11: MARK "⊗" TO MEASURE DIMENSIONS FOR FAI.

TABLE:

SHELL	SPCC,T=0.30mm;	NICKEL OVER ALL
CONTACT	Copper Alloy;T=0.20mm	Ni:50u"Min; Au:CONTACT AREA:1U"5U"/15U", Solder AREA:Sn 50-120u"
PLASTIC	THERMOPLASTIC/BLACK/WHITE	-----
PART NAME	MATERIALS	FINISH

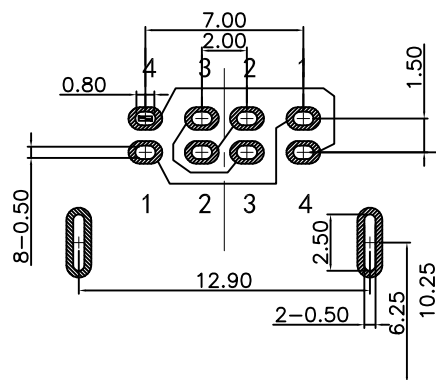

2层或以上PCB板建议布线方式


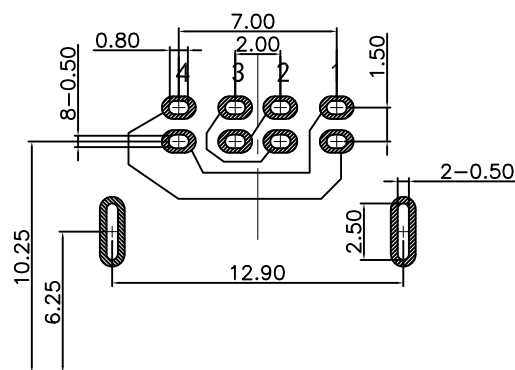


单层板建议布线方式




深圳市华宇创精密电子有限公司


TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB 2.0 AF 双面90° DIP 直脚无卷边无垫片	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC59-USBA08-640	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2601080946	SHEET NO. 1 OF 1

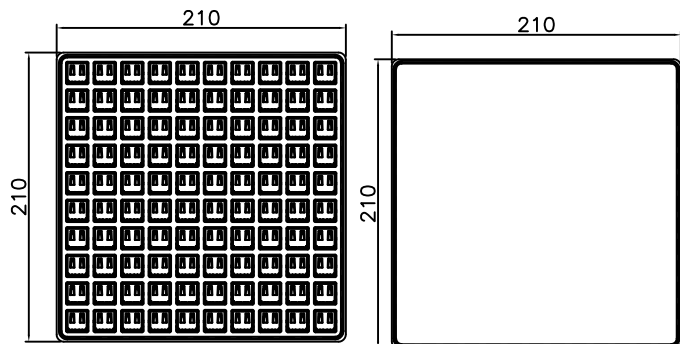

上托盘

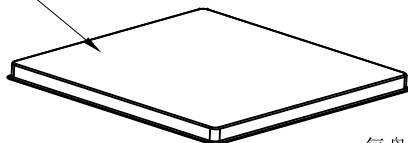


下托盘

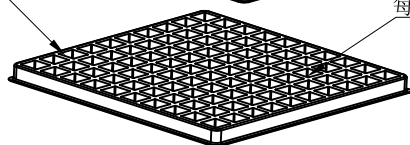


每盘装100PCS



一捆25盘

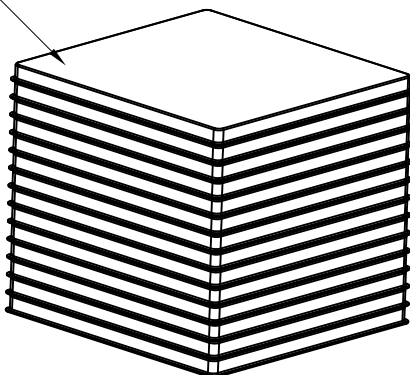

每箱放2捆50盘

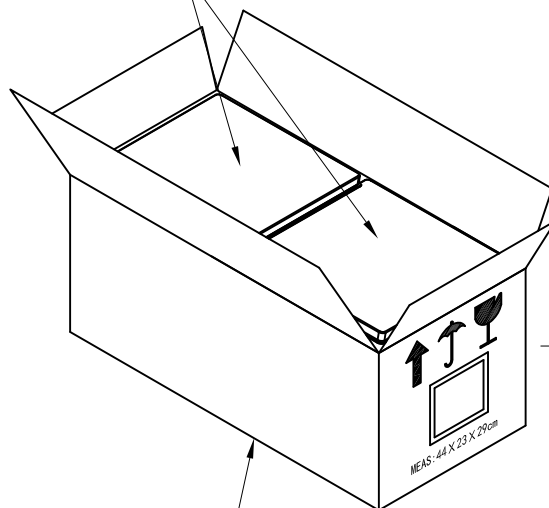

一捆25盘

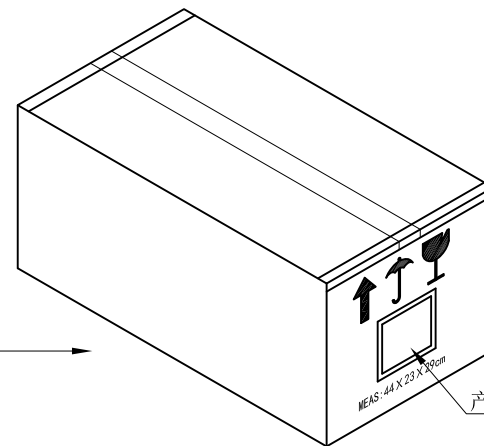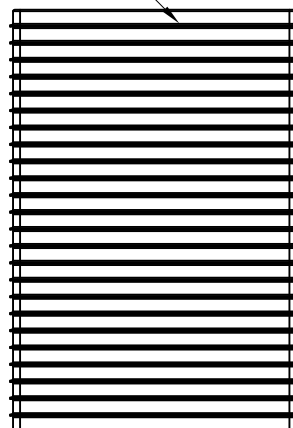

产品外标签

备注:

1. 每箱装2捆共50盘, 每盘100PCS, 共计5000PCS.
2. 纸箱用封箱带将其封好, 胶带要求工字型, 指定位置贴物料和RoHS标签, 不可遮贴标签.
3. 如果客户对包装标签另有要求, 请按客户要求作业; 有未满足之零数箱需用缓冲材料填充;



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5'	DRAWN BY :	DATE :	PART NAME:	
	陈一鸣	2014-02-23	包装图	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY:	DATE :	PART NO.	
	马跃	2014-02-23	MOLD NO.	
	APPROVED BY:	DATE :	DRAW NO:	
	邱敏	2014-02-23	SHEET NO.	1 OF 1