


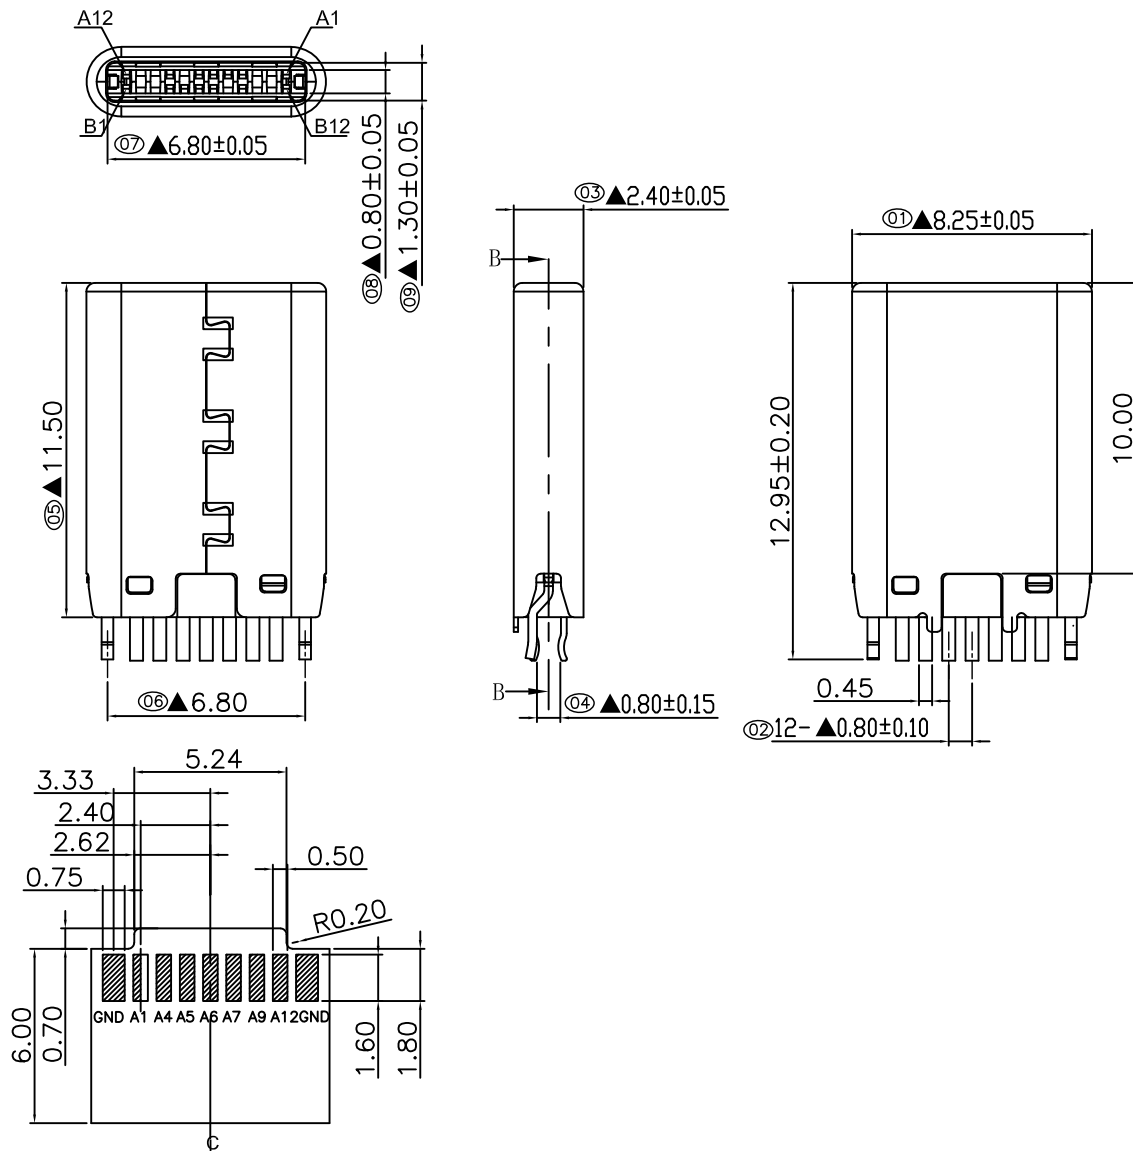

RECOMMENDED PCB LAYOUT
PCB THICKNESS 0.8mm
GENERAL TOLERANCE ± 0.05

NOTES:

1. CURRENT RATING:
3.0A MAX.
2. DIELECTRIC WITHSTAND VOLTAGE:
100VAC.
3. TEMPERATURE RANGE:
 $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
4. CONTACT RESISTANCE:
40 MILLIONHM MAX.
5. INSULATION RESISTANCE:
100 MEGOHMS MIN.
6. INSERTION FORCE :
5N~20N.
7. UNMATING FORCE:
8N~20N.
8. DURABILITY:
10,000 CYCLES.
9. ALL PRODUCTS COMPLY WITH RoHS
ENVIRONMENTAL REQUIREMENTS.
10. MARK "▼" AS THE FOCUS,
FIRST ITEM INSPECTION.
11. MARK "⊗" TO MEASURE DIMENSIONS
FOR FAI.

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-		VBUS			GND
GND			VBUS		D-	D+	CC2	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

TABLE:


INSERT MOLD	SHELL	Stainless Steel;T=0.15mm;	Ni:50u"Min
	LATCH	Stainless Steel;T=0.3mm;	Electroplated semi-nickel matte tin;50u"Min;
	EMC SPRING	Stainless Steel;T=0.10mm	-----
	CONTACT	Copper Alloy;T=0.18mm	Ni:50u"Min; Au:CONTACT AREA:1u", Solder AREA:Sn 50-100u"
	PLASTIC	LCP(G.F30%) BLACK.	-----
P/N	PART NAME	MATERIALS	FINISH




深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 公座14P(7+7P) 侧合壳 夹板式有接地 1=11.5mm	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC671-USBC14-115	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2601070933	SHEET NO. 1 OF 1


包装示意图:

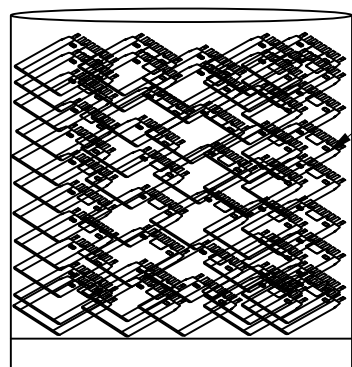


每袋500PCS

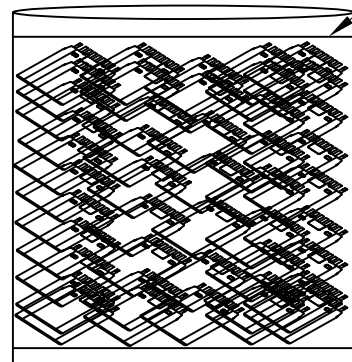

热封线

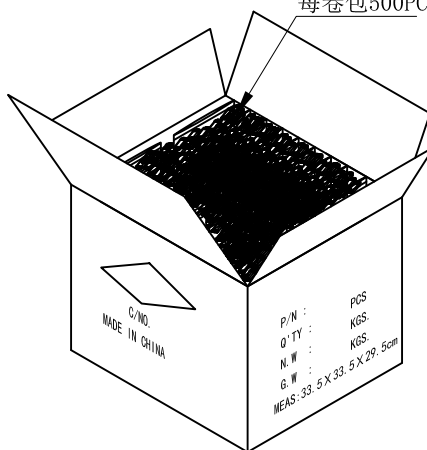

每卷包500PCS, 每箱装20袋 (10000PCS)

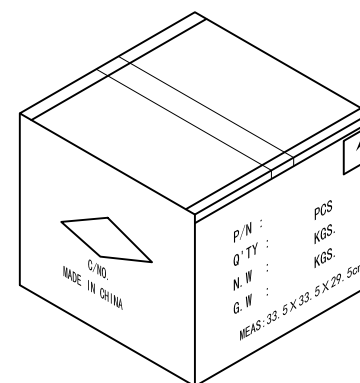

产品外标签

备注:

1. 将产品装入PE袋中, 每袋装500PCS, 装完成后需用热熔机封口.
2. 在每袋装OK的PE袋上, 贴上物料和RoHS标签装入纸箱内. 每箱装20袋 (10000PCS).
3. 纸箱用封箱带将其封好, 胶带要求工字型, 不可遮住标签;
4. 如果客户对包装标签另有要求, 请按客户要求作业; 有未满足之零数箱需用缓冲材料填充;



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5* UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY :	DATE :	PART NAME:	
	陈一鸣	2014-02-23	包装图	
	CHECKED BY:	DATE :	PART NO.	
	马跃	2014-02-23	MOLD NO.	
	APPROVED BY:	DATE :	DRAW NO:	
	邱敏	2014-02-23	SHEET NO.	1 OF 1